




Woollahra Local Planning Panel (Electronic Meeting)

Thursday 20 June 2024
at the Conclusion of the Public Meeting

Minutes

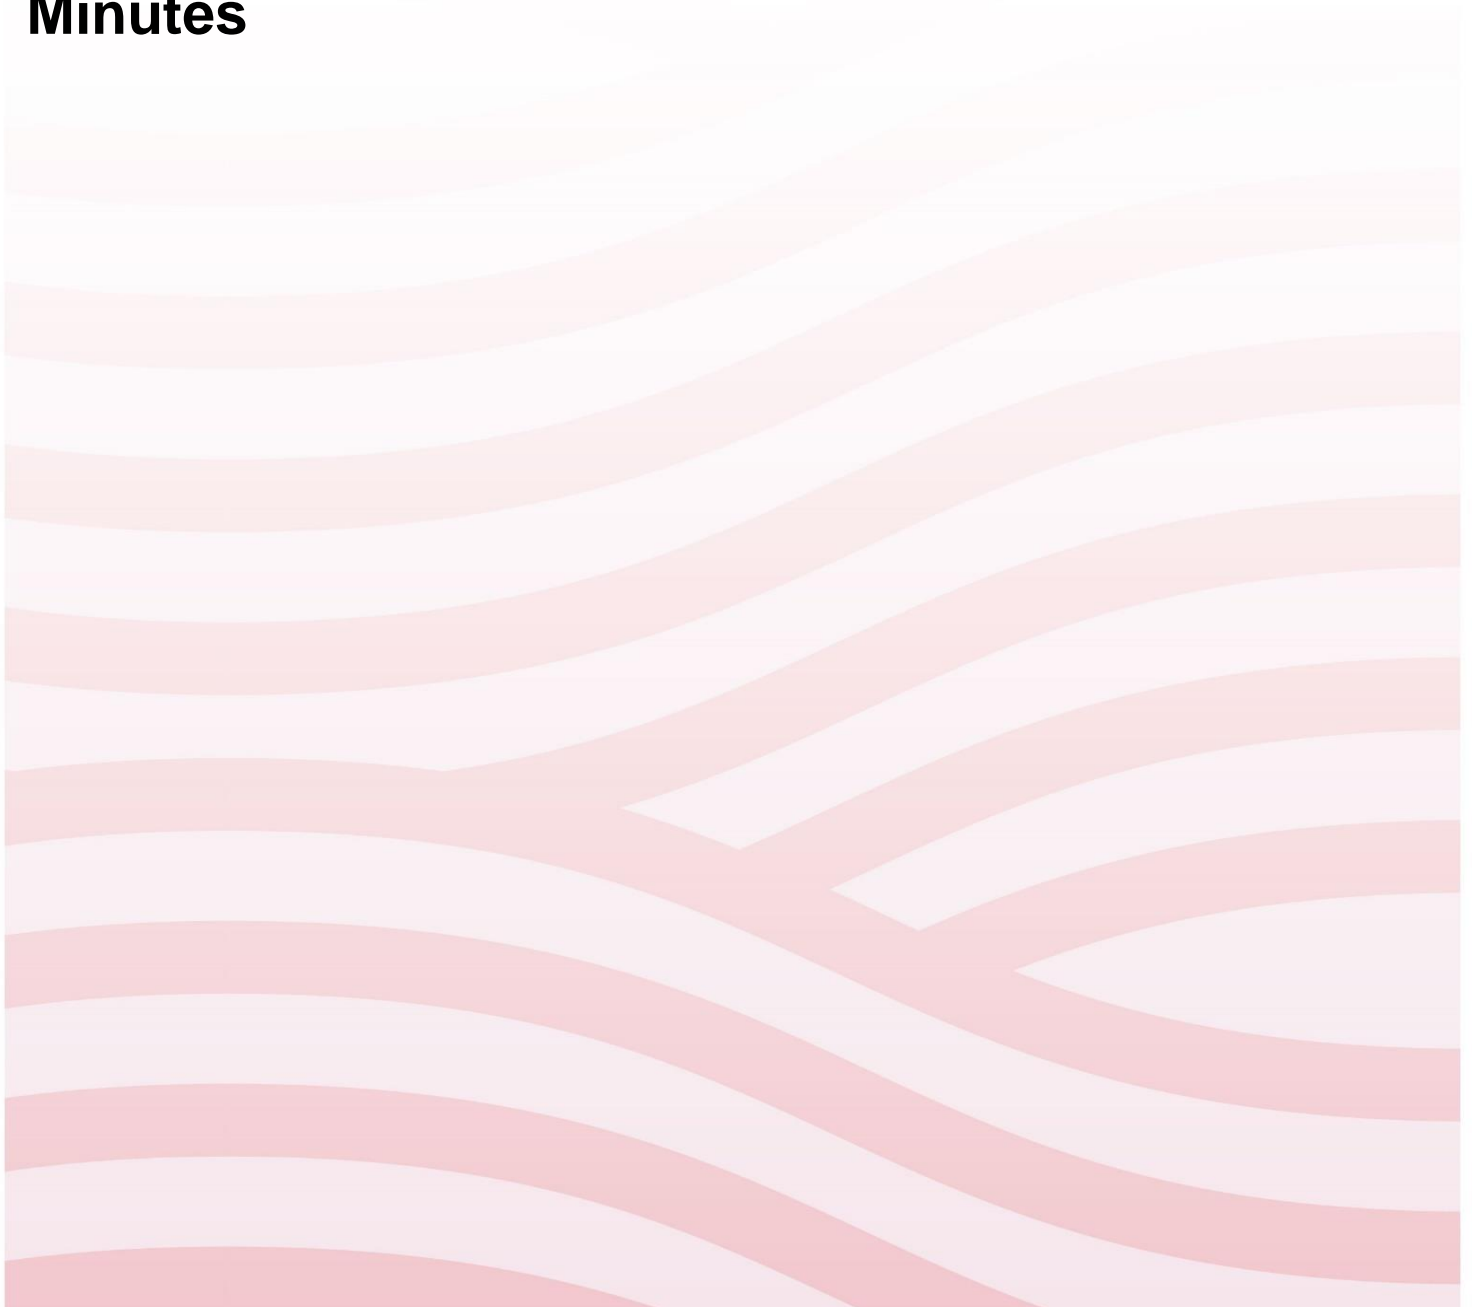

Woollahra Local Planning Panel (Electronic) Minutes

Thursday 20 June 2024

Table of Contents

Item	Subject	Pages
D1	DA210/2023/1 - 22 Boronia Road Bellevue Hill.....	4
D2	DA278/2023/1 - 79 Bellevue Road Bellevue Hill	61
D3	DA41/2024/1 - 361-441 Glenmore Road Paddington.....	63
D4	DA301/2023/1 - 464 Oxford Street Paddington.....	92

Woollahra Local Planning Panel (Electronic)

Minutes of the Meeting held on 20 June 2024 at the Conclusion of the Public Meeting

Present: Penny Holloway (Chair)
Judith Clark (Expert)
Sandra Robinson (Expert)
Ronald Schaffer (Community Representative)

Staff: George Fotis (Team Leader)
Brett McIntyre (Acting Team Leader)
Carolyn Nurmi (Governance Officer)
Max Moratelli (Team Leader)
Thomass Wong (Acting Manager Development Assessment)

Note: The Panel was briefed by Council staff on each Item prior to the meeting.
The Panel then deliberated and voted on each Item in a confidential meeting.
The decisions are recorded in these Minutes.

Leave of Absence and Apologies

Nil

Late Correspondence

Late correspondence was submitted to the Panel in relation to items D1 and D2

Declarations of Interest

Nil

ITEM No. D1
FILE No. DA210/2023/1
ADDRESS 22 Boronia Road, Bellevue Hill
PROPOSAL Demolition of the existing dwelling, and construction of a new residential flat building containing four units and basement parking, swimming pool, and associated landscaping

Note: Late correspondence was tabled by Con Harris.

Reasons for Decision

The Panel has undertaken a site inspection, considered any submissions and late correspondence, and reviewed the assessment report prepared by Council officers that addresses the relevant matters detailed in Section 4.15 of the Environmental Planning and Assessment Act 1979.

The Panel considered the assessment of SEPP 65 and ADG in the assessment report carries the same weight as Chapter 4 of the Housing SEPP (2021)

For the reasons generally in the assessment report, the Panel is satisfied that the application can be approved subject to the conditions in the assessment report with the amendment to Condition C.1 g) to include the selection from the list of local native plants.

Resolved: Pursuant to Section 4.16 of the Environmental Planning and Assessment Act 1979

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, is satisfied that the written requests from the applicant under Clause 4.6 of the Woollahra Local Environmental Plan 2014 to the 700m² Minimum Lot Size development standard under Clause 4.1 and the 9.5m Height of Buildings development standard under Clause 4.3 of Woollahra LEP 2014 have adequately addressed the relevant matters and the proposed development will be in the public interest because it is consistent with the relevant objectives of the particular standard and the zone. The Panel assumes the concurrence of the Secretary, Department of Planning, Industry and Environment.

AND

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, grant development consent to Development Application No. 210/2023/1 for demolition of the existing dwelling, and construction of a new residential flat building containing four units and basement parking, swimming pool, and associated landscaping on land at 22 Boronia Road Bellevue Hill, subject to the following conditions:

A. General Conditions

A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 4.16 of the *Environmental Planning and Assessment Act 1979* ("the Act") and the provisions of the *Environmental Planning and Assessment Regulation 2000* ("the Regulation") such conditions being reasonable and relevant to the development as assessed pursuant to section 4.15 of the Act.

Standard Condition: A1 (Autotext AA1)

A.2 Definitions

Unless specified otherwise, words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

Applicant means the applicant for this consent.

Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

AS or **AS/NZS** means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

BCA means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any Construction Certificate.

Council means Woollahra Municipal Council

Court means the Land and Environment Court

Local native plants means species of native plant endemic to Sydney's eastern suburbs (see the brochure titled "Local Native Plants for Sydney's Eastern Suburbs" published by the Southern Sydney Regional Organisation of Councils).

Stormwater drainage system means all works, facilities and documentation relating to:

- the collection of stormwater,
- the retention of stormwater,
- the reuse of stormwater,
- the detention of stormwater,
- the controlled release of stormwater; and
- connections to easements and public stormwater systems.

Owner means the owner of the *site* and successors in title to the *site*.

Owner-builder has the same meaning as in the *Home Building Act 1989*.

PC means the Principal Certifier under the *Act*.

Principal Contractor has the same meaning as in the *Act*, or where a Principal Contractor has not been appointed by the Owner of the land being developed Principal Contractor means the Owner of the land being developed.

Professional engineer has the same meaning as in the *BCA*.

Public place has the same meaning as in the *Local Government Act 1993*.

Road has the same meaning as in the *Roads Act 1993*.

SEE means the final version of the Statement of Environmental Effects lodged by the Applicant.

Site means the land being developed subject to this consent.

Woollahra LEP means *Woollahra Local Environmental Plan 2014*

Woollahra DCP means *Woollahra Development Control Plan 2015*

Work for the purposes of this consent means:

- the use of land in connection with development,
- the subdivision of land,
- the erection of a building,
- the carrying out of any work,
- the use of any site crane, machine, article, material, or thing,
- the storage of waste, materials, site crane, machine, article, material, or thing,
- the demolition of a building,
- the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- the delivery to or removal from the *site* of any machine, article, material, or thing, or
- the occupation of the *site* by any person unless authorised by an occupation certificate.

Note: Interpretation of conditions - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.
 Standard Condition: A2 (Autotext AA2)

A.3 Approved Plans and Supporting Documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with both the architectural plans to which is affixed a Council stamp “Approved” and supporting documents listed below as submitted by the Applicant unless modified by any following condition.

Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
DA1001 A	Site plan	Mark Shapiro Architects	25/05/2023
DA2000 B	Basement plan		03/08/2023
DA2001 B	Ground floor plan		03/08/2023
DA2002 A	First floor plan		25/05/2023
DA2003 A	Rear first floor plan		25/05/2023
DA2004 A	Second floor plan		25/05/2023
DA2005 A	Roof level plan		25/05/2023
DA2300 B	Section A		03/08/2023
DA2301 A	Section B		25/05/2023
DA2302 A	Section C		25/05/2023
DA2303 A	Section D		25/05/2023
DA2400 A	East elevation		25/05/2023
DA2401 A	North elevation		25/05/2023
DA2402 A	West elevation		25/05/2023
DA2403 A	South elevation		25/05/2023
DA2500 B	Driveway detail		03/08/2023
DA2501 B	Driveway detail		03/08/2023
DA2502 B	Footpath plan and section		03/08/2023
DA2503 B	Section D1		03/08/2023
DA2504 B	Section D2		03/08/2023
1367774M	BASIX Certificate	NSW Department of Planning and Environment	30/05/2023
DA2404 A	Finishes schedule	Mark Shapiro Architects	25/05/2023
23.081r01v02	Transport Impact Statement	TRAFFIX	11/04/2023
23.081r02v03	Traffic Response to Request for Information	TRAFFIX	08/08/202

Reference	Description	Author/Drawn	Date(s)
220537 D00 Rev B D01 Rev C D02 Rev B D03 Rev B D10 Rev B D15 Rev B D16 Rev A D17 Rev B D18 Rev B	Stormwater Management Plan	SMART Structures Australia	20/07/2023 16/08/2023 20/07/2023 20/07/2023 20/07/2023 25/01/2023 20/07/2023 20/07/2023
P2810_01 rev1	Geotechnical Report	Morrow	03/07/2023
SHI-220537-2	Structural Design Certificate	SMART Structures Australia	17/08/2023
--	Site Waste Minimisation and Management Plan	Mark Shapiro Architects	15/03/2023

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the Applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 4.17(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)
 Standard Condition: A5 (Autotext AA5)

A.4 Ancillary Aspects of Development (section 4.17(2) of the Act)

The Owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's *Specification for Roadworks, Drainage and Miscellaneous Works (2012)* unless expressly provided otherwise by these conditions at the Owner's expense.

Note: This condition does not affect the Principal Contractor's or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.
 Standard Condition: A8 (Autotext AA8)

A.5 Development Consent is Not Granted in Relation to these Matters

This approval does not give consent to

- a) The burning of solid fuels to the proposed external fire pit to located to the private open space of Unit 1.

This condition is imposed to ensure certainty of development consent and to protect the air quality and residential amenity in accordance with O9 and C10 of Section B3.7.3 of the Woollahra DCP 2015.
 Standard Condition: A9 (Autotext AA9)

A.6 No Underpinning works

This development consent does NOT give approval to any works outside the boundaries of the subject property including any underpinning works to any structures on adjoining properties and Council's property.

A.7 Vehicular Access and Garaging

Driveways and vehicular access ramps shall be designed to provide adequate ground clearance to the underside of B99 vehicles. In all respects, the proposed vehicular access including any parking spaces must be designed and constructed to comply with the minimum requirements of AS2890.1, AS2890.2, AS2890.6 and the Council's DCP.

A.8 Tree Preservation & Approved Landscaping Works

All landscape works shall be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

a) The following trees shall be retained

- Trees on Council Land

Council Ref No.	Species	Location	Dimension (metres)	Tree Value
1	Tristaniopsis laurina	Street tree	6 x 6	\$5000

Note: The tree/s required to be retained should appear coloured green on the construction certificate plans.

b) The following trees may be removed:

Council Ref No.	Species	Location	Dimension (metres)
11	Archontophoenix cunninghamiana	Rear Yard	9 x 3

Note: Tree/s to be removed shall appear coloured red on the construction certificate plans.

Note: The species marked (*) is exempt from the WMC DCP 2015 and can be removed without requiring consent from Council.

B. Conditions which must be satisfied prior to the demolition of any building or construction

B.1 Construction Certificate Required Prior to Any Demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 6.6 of the *Act*.

In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a Principal Certifier, and Notice of Commencement under the *Act*.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.
Standard Condition: B1 (Autotext BB1)

B.2 Identification of Hazardous Material

In accordance with Australian Standard AS2601: *The Demolition of Structures*, the Owner shall identify all hazardous substances located on the site including asbestos, polychlorinated biphenyls (PCBs), lead paint, underground storage tanks, chemicals, etc. per clause 1.6.1 of the Standard.

In this regard, **prior to the commencement of any work**, Council shall be provided with a written report prepared by a suitably qualified competent person detailing:

- all hazardous materials identified on the site,
- the specific location of all hazardous materials identified,
- whether the hazardous materials are to be removed from the site as part of the works to be undertaken, and
- safety measures to be put in place.

Note: This condition is imposed to protect the health and safety of all persons while works are being undertaken and to ensure all safety measures have been identified and are in place to protect all parties in the immediate vicinity of the site.

Standard Condition: B6

B.3 Public Road Assets Prior to Any Work/Demolition

To clarify the condition of the existing public infrastructure prior to the commencement of any development (including prior to any demolition), the Applicant or Owner must submit to Council a full record of the condition of the public road infrastructure adjacent to the development site.

The report must be submitted to Council **prior to the commencement of any work** and include photographs showing current condition and any existing damage fronting and adjoining the site to the:

- road pavement,
- kerb and gutter,
- footway including footpath pavement and driveways,
- retaining walls within the footway or road, and
- drainage structures/pits.

The reports are to be supplied in both paper copy and electronic format in Word. Photographs are to be in colour, digital and date stamped.

If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any work under this consent.

Note: If the Applicant or Owner fails to submit the asset condition report required by this condition and damage is occasioned to public assets adjoining the site, Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose

Standard Condition: B7

B.4 Aboriginal Objects – Unexpected Findings

If unexpected Aboriginal objects or bones are found during any activity associated with this consent, you must:

- a) Not further disturb or move these objects or bones.
- b) Immediately cease all work at the particular location.
- c) In the case of suspected human remains, notify NSW Police.
- d) Notify the Heritage NSW Environment Line on 131 555 and the La Perouse LALC on (02) 9311 4282 as soon as practicable and provide available details of the objects or remains and their location.
- e) Not recommence any work at the particular location unless authorised in writing by Heritage NSW. Additional assessment and approval pursuant to the *National Parks and Wildlife Act 1974* may be required prior to works continuing in the affected area(s) based on the nature of the discovery.

Note: The Definition of Aboriginal object as per the Woollahra Local Environmental Plan 2014: any deposit, object or other material evidence (not being a handicraft made for sale) relating to the Aboriginal habitation of an area of New South Wales, being habitation before or concurrent with (or both) the occupation of that area by persons of non-Aboriginal extraction, and includes Aboriginal remains.
Standard Condition: B10 (Autotext BB10)

B.5 Skeletal Remains

If any skeletal remains suspected of being human are found during construction works, work must cease immediately and no further disturbance of the site must occur. The NSW Police and the Department of Premier and Cabinet, Community Engagement, Heritage must be notified and details of the remains and their precise location are to be provided.

Standard Condition: B9

B.6 Aboriginal Heritage Due Diligence Responsibilities

Nothing in this approval allows to cause harm to an Aboriginal object as defined in the *National Parks & Wildlife Act 1974*. Under the *National Parks & Wildlife Act 1974*, it is an offence to harm Aboriginal 'objects' (consisting of any material evidence of the Aboriginal occupation of NSW) without a valid Aboriginal Heritage Impact Permit under Section 90 of the Act. This applies whether the harm occurs either knowingly [s86(1)] or unknowingly [s86(2)].

It is a defence to the strict liability offence of harm to an Aboriginal object under s86(2) if a process of Due Diligence was followed which reasonably determined that the proposed activity would not harm an Aboriginal object.

Standard Condition: B12 (Autotext BB12)

B.7 Aboriginal Heritage Induction

- a) All construction staff and contractors must be made aware of their statutory obligations for Aboriginal heritage under the *National Parks and Wildlife Act 1974*;
- b) An Aboriginal heritage induction is to be delivered by the La Perouse Local Aboriginal Land Council or by a heritage consultant with Aboriginal heritage expertise, if a representative of the Local Land Council is not able to provide the induction), to explain what Aboriginal heritage may be found and outline the unexpected findings procedures; and
- c) Documentary evidence demonstrating compliance with a. and b. above being submitted to Council and the Principal Certifier.

Standard Condition: B13 (Autotext BB13)

B.8 Sandstone

If sandstone is uncovered during works, it is to be inspected by a qualified archaeologist specialising in Aboriginal heritage for any evidence of rock engraving. Based on this inspection, a determination will be made as to whether further archaeological monitoring/ investigation is required, or whether bulk excavation can continue under the recommended 'unexpected finds' protocol.

B.9 Salvage of stone, bricks, joinery and decorative architectural elements to be demolished

Stone, bricks, joinery and decorative architectural elements to be demolished, which include windows and doors, chimney pieces, sandstone, plaster medallions, fireplaces, timber flooring, decorative ceilings and ceiling roses must be salvaged and where possible reused on the project. Salvaged building materials surplus to the project must either be stored on site for future reuse, or transferred to an established second building material dealer for recycling.

B.10 Establishment of Tree Protection Zone (TPZ) Fence

Tree Protection Zones shall be established around all trees to be retained and in accordance with Section 4 of the *Australian Standard Protection of Trees on Development Sites (AS 4970- 2009)*. Tree protection zones must also comply with the following requirements;

- a) Tree Protection Zone areas

Council Ref No.	Species	Tree Location	Fence Radius from Centre of Trunk (Metres)
1	Tristaniopsis laurina	Street tree	2m
2	Magnolia grandiflora	Adjacent eastern boundary – within front yard of 24 Boronia Rd	Boundary line
3 – 10	Cupressus spp.	Adjacent western boundary – within rear yard of 20 Boronia Rd	2m from boundary line

Note: Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing shall be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways, footpaths and bus stops is protected.

Note: Where this condition relates to trees on private property the radial distance of fencing shall be positioned only within the subject property.

- b) Tree Protection Zones shall be fenced with a 1.8 metre high chainmesh or weldmesh fence and secured to restrict access. The fence shall be established prior to any materials being bought onto the site and before the commencement of works including demolition. The area within the fence shall be mulched and maintained to a depth of 75mm. The soil within the TPZ shall be kept in a moist condition for the duration of the construction works. Unless approved by the site arborist there shall be no access within the TPZ.
- c) A sign identifying the Tree Protection Zone shall be erected on each side of the protection fence indicating the existence of a TPZ. Signage must be visible from within the development site.
- d) No excavation, construction activity, grade changes, storage of materials, stockpiling, siting of works sheds, preparation of mixes or cleaning of tools is permitted within Tree Protection Zones, unless specified in this consent.
- e) Temporary access within the TPZ for pedestrian and machinery movements shall only be permitted with the approval of the site arborist or unless specified in this consent.
- f) The site supervisor must be made aware of all tree protection requirements associated with these conditions of consent by the project arborist. Any subsequent site personnel and contractors to the site must be made aware of all tree protection requirements by the site foreman.
- g) The project arborist shall provide written certification of compliance with the above condition.

B.11 Permissible work within Tree Protection Zones

The following works are permissible within the Tree Protection Zone:

Council Ref No.	Species	Radius from Trunk (metres)	Approved works
1	Tristanopsis laurina	3.8m	New front boundary wall and associated landscape works.
2	Magnolia grandiflora	2m	Landscape works.
3-10	Cupressus spp.	2.3m	New boundary wall and associated landscape works.

The project arborist shall provide written certification of compliance with the above condition.

B.12 Demolition and Construction Management Plan

The Demolition and Construction Management Plan shall be reviewed and certified by the Project Arborist that appropriate tree protection measures have been accounted for. The Demolition and Construction Management Plan shall be prepared in accordance with all tree protection measures specified within this consent. Considerations by the Project Arborist shall include but not be limited to:

- a) Drawings and method statement showing details and the location of hoarding and scaffold and any pruning required to accommodate the hoarding and scaffolding;
- b) The movement and positioning of heavy machinery, lifting cranes, pier drilling gantry etc;
- c) Site construction access, temporary crossings and movement corridors on the site defined;
- d) Contractors car parking;
- e) Phasing of construction works;
- f) The space needed for all foundation excavations and construction works;
- g) All changes in ground level;
- h) Space for site sheds and other temporary structures such as toilets;
- i) Space for sorting and storing materials (short or long term), spoil and fuel and the mixing of cement and concrete; and
- j) The effects of slope on the movement of potentially harmful liquid spillages towards or into tree protection areas.

B.13 Arborists Documentation and Compliance Checklist

The site arborist shall provide written certification that all tree protection measures and construction techniques relevant to this consent have been complied with. Documentation for each site visit shall include:

- A record of the condition of trees to be retained prior to and throughout development
- Recommended actions to improve site conditions and rectification of non-compliance
- Recommendations for future works which may impact the trees

All compliance certification documents shall be kept on site by the Site Foreman.

As a minimum the following intervals of site inspections must be made:

Stage of arboricultural inspection and supervision	Compliance documentation and photos shall be included
Prior to the demolition of any building or construction and prior to the commencement of any development work	<ul style="list-style-type: none"> • Project Arborist to hold pre construction site meeting with the principal contractor to discuss methods and importance of tree protection measures and resolve any issues in relation to feasibility of tree protection requirements that may arise. Project Arborist to mark all trees approved for removal under DA consent. • The project arborist shall install or supervise the installation of tree protection fencing, trunk protection, ground protection and traffic height control beam.
During any development work	<ul style="list-style-type: none"> • The project arborist shall supervise all demolition and excavation works within the Tree Protection Zones or specified distances of nominated trees listed in this consent. • The project arborist shall ensure pier holes within the Tree Protection Zones or specified distances of nominated trees listed in this consent are positioned to avoid the severance of and damage to roots greater than 50mm diameter. • The project arborist shall inspect the installed irrigation system to plants in garden beds. The arborist shall certify there is an appropriate distribution of water to planted and existing trees. • Project Arborist to approve relocation of tree protection for landscaping. All landscaping works within the TPZ of trees to be retained are to be undertaken in consultation with the project Arborist to minimise the impact to trees.
Prior to any occupation or use of the building	<ul style="list-style-type: none"> • Ensure all trees conditioned to be planted as part of this consent have been planted in accordance with the details prescribed in this consent.
Prior to the issue of a Final Occupation Certificate	<ul style="list-style-type: none"> • The project arborist shall supervise the dismantling of tree protection measures. • After all demolition, construction and landscaping works are complete the project Arborist shall assess that the subject trees have been retained in the same condition and vigour. If changes to condition are identified the project Arborist should provide recommendations for remediation.

Inspections and compliance documentation shall be made by an arborist with AQF Level 5 qualifications.

Additional site visits shall be made when required by site arborist and/or site foreman for ongoing monitoring/supervisory work

C. Conditions which must be satisfied prior to the issue of any Construction Certificate

C.1 Modification of Details of the Development (section 4.17(1)(g) of the Act)

The approved plans and the Construction Certificate plans and specification, required to be submitted to the Certifying Authority pursuant to clause 139 of the *Regulation*, must detail the following amendments:

- a) Roof level photovoltaic solar panels and skylights are not to exceed a maximum height of RL 31.8 AHD. The lift overrun is not to exceed a maximum height of RL 32.4 AHD.

This condition is imposed to minimise visual and amenity impacts in accordance the design guidelines for objective 4N-3 of the Apartment Design Guide of SEPP 65 and objectives and controls O1, C1 and C5 of B3.5.1 and O1, C1 and C2 of E6.3 of the of the Woollahra DCP 2015.

- b) Roof level mechanical plant equipment is limited to the lift overrun and is to be confined to the location detailed to the to the approved roof plan, and annotated as “LIFT OVERRUN”.

Mechanical plant equipment with the exception of the approved lift overrun must be located internally within the principal building in suitably designed plant room or the like to ensure that they do not result in adverse streetscape or amenity impacts.

The location of air conditioning plant equipment is to be internally housed to approved plant room areas.

This condition is imposed to minimise visual and amenity impacts in accordance the design guidelines for objectives 4N-1 and 4N-3 of the Apartment Design Guide of SEPP 65 and objectives and controls O6, O7, O8, C7, C8 and C9 of B3.7.3 of the Woollahra DCP 2015.

- c) The second floor level bathroom window opening to the south elevation must consist of fixed translucent glazing to a minimum height of 1.65m above the first floor level in accordance with O2 and C5 of B3.5.4 of the Woollahra Development Control Plan 2015.
- d) Rear and side boundary fencing is not to exceed 1.8m in height above the finished ground levels. This condition is imposed to ensure boundary fencing is not visually intrusive in accordance with objectives and controls O5, C9 and C10 of B3.7.5 of Woollahra DCP 2015.
- e) The section of retaining wall along the eastern boundary within 2 metres of Tree 2 must be retained inside. This condition is imposed to protect Tree 2 located within 20 Boronia Road, Bellevue Hill.
- f) The design of the western boundary wall within the TPZ of trees 3-10 shall include pier footings that can be relocated if any tree roots greater than 40mm in diameter are identified during the works.
- g) The Landscape Plan shall be amended as follows:
- a. The planting of the 4x *Strelitzia nicolai* is to be deleted and an alternative species shall be selected from the list of local native plants.
 - b. All new tree planting within the site must be a minimum container size of 100 litres at the time of planting.

Note: The effect of this condition is that it requires design changes and/or further information to be provided with the Construction Certificate drawings and specifications to address specific issues identified during assessment under section 4.15 of the *Act*.

Note: Clause 146 of the *Regulation* prohibits the issue of any Construction Certificate subject to this condition unless the Certifying Authority is satisfied that the condition has been complied with.

Note: Clause 145 of the *Regulation* prohibits the issue of any Construction Certificate that is inconsistent with this consent.

Standard Condition: C4 (Autotext CC4)

C.2 Payment of Long Service Levy, Security, Contributions and Fees

The Certifying Authority must not issue any certificates under section 6.4 of the *Act* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees prior to the issue of a Construction Certificate, Subdivision Certificate or Occupation Certificate, as will apply.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under <i>Building and Construction Industry Long Service Payments Act 1986</i>			
Long Service Levy www.longservice.nsw.gov.au/bci/levy/other-information/levy-calculator	Contact LSL Corporation or use online calculator	No	
SECURITY under section 4.17(6) of the <i>Environmental Planning and Assessment Act 1979</i>			
Property Damage Security Deposit -making good any damage caused to any property of the Council	\$96,530	No	T115
Tree Damage Security Deposit – making good any damage caused to any public tree	\$5,000	No	T114
Infrastructure Works bond (\$138)	\$15,300	No	T113
DEVELOPMENT LEVY under Woollahra Section 7.12 Development Contributions Plan 2021 This plan may be inspected at Woollahra Council or downloaded at www.woollahra.nsw.gov.au			
Development Levy (section 7.12)	\$ 39,200 + Index Amount	Yes, quarterly	T96
INSPECTION FEES under section 608 of the <i>Local Government Act 1993</i>			
Public Tree Management Inspection Fee	\$221.34	No	T45
Public Road/Footpath Infrastructure Inspection Fee	\$645	No	T45
Security Administration Fee	\$202	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$ 157,098.34 plus any relevant indexed amounts and long service levy		

Building and Construction Industry Long Service Payment

The long service levy under section 34 of the *Building and Construction Industry Long Service Payment Act 1986*, must be paid and proof of payment provided to the Certifying Authority prior to the issue of any Construction Certificate. The levy can be paid directly to the Long Service Corporation or to Council. Further information can be obtained from the Long Service Corporation website www.longservice.nsw.gov.au or the Long Service Corporation on 131 441.

How must the payments be made?

Payments must be made by:

- cash deposit with Council,
- credit card payment with Council, or
- bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- the guarantee is by an Australian bank for the amount of the total outstanding contribution,

- the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable],
- the bank agrees to pay the guaranteed sum without reference to the Applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent,
- the bank guarantee is lodged with the Council prior to the issue of the Construction Certificate, and
- the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 7.12 levy (formerly known as 94A levy) be indexed?

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2021 sets out the formula and index to be used in adjusting the levy.

Do you need HELP indexing the levy?

Please contact Council's Customer Service Team on ph 9391 7000. Failure to correctly calculate the adjusted development levy will delay the issue of any certificate issued under section 6.4 of the *Act* and could void any such certificate (eg Construction Certificate, Subdivision Certificate, or Occupation Certificate).

Deferred or periodic payment of section 7.12 levy (formerly known as 94A levy) under the Woollahra Section 94A Development Contributions Plan 2021

Where the Applicant makes a written request supported by reasons for payment of the section 7.12 levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- the reasons given,
- whether any prejudice will be caused to the community deriving benefit from the public facilities,
- whether any prejudice will be caused to the efficacy and operation of the Plan, and
- whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- the guarantee is by an Australian bank for the amount of the total outstanding contribution,
- the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable],
- the bank agrees to pay the guaranteed sum without reference to the Applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent,
- the bank guarantee is lodged with the Council prior to the issue of the Construction Certificate, and
- the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or periodic payment of the section 7.12 levy will be adjusted in accordance with clause 3.13 of the Plan. The Applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

C.3 BASIX Commitments

The Applicant must submit to the Certifying Authority BASIX Certificate No. 1367774M with any application for a Construction Certificate.

Note: Where there is any proposed change in the BASIX commitments the Applicant must submit of a new BASIX Certificate to the Certifying Authority and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (see: clauses 145 and 146 of the *Regulation*) the Applicant will be required to submit an amended development application to Council pursuant to section 4.55 of the *Act*.

All commitments in the BASIX Certificate must be shown on the Construction Certificate plans and specifications prior to the issue of any Construction Certificate.

Note: Clause 145(1)(a1) of the *Environmental Planning and Assessment Regulation 2000* provides: "A certifying authority must not issue a Construction Certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires".
Standard Condition: C7

C.4 Road and Public Domain Works

A separate application under Section 138 of the *Roads Act 1993* is to be made to, and be approved by Council as the road authority, for the following infrastructure works prior to the issuing of any Construction Certificate. The infrastructure works must be carried out at the applicant's expense:

- a) The removal of the existing vehicular crossing including layback and gutter and the construction a new 3.05 metres wide vehicular crossing plus the reconstruction of the layback wing of the neighbouring crossing in accordance with Council's standard drawing RF2_D, Crossing Specification, driveway detail plan by Mark Shapiro, referenced DA2500-B, dated 03/08/2023 and to the satisfaction of Council's Assets Engineers. The new vehicular crossing must be located at a minimum distance of one (1) metre from the existing power pole. Design longitudinal profiles along each edge/side of the proposed crossing, starting from the centreline of the road to the parking slab must be submitted for assessment,
- b) The reconstruction of the existing 1.8m wide concrete footpath for the full frontage of the site in Boronia Road in accordance with Council's Specification for Roadworks, Drainage and Miscellaneous Works and to the satisfaction of Council's Assets Engineers, A maximum crossfall of 3% must be provided for the concrete footpath from the property boundary towards the top of kerb. A design longitudinal surface profile (scale 1:100) and cross sections (scale 1:50) at every 5 metres intervals must be submitted for assessment.
- c) The reinstatement of all damaged kerb and gutter and road pavement to Council's Specification and to the satisfaction of Council's Assets Engineers,
- d) Where a grass verge exists, the balance of the area between the footpath and the kerb over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of Couch turf.
- e) The stormwater connection to the existing kerb inlet pit located within the site frontage in Boronia Road in accordance with Council's Specification for Roadworks, Drainage and Miscellaneous Works and to the satisfaction of Council's Assets Engineers,
- f) The developer shall be responsible for carrying out all service investigations to allow a gravity connection.
- g) A bond of \$15,300 will be used as security to ensure the satisfactory completion of the infrastructure works. The security or bank guarantee must be the original unconditional bank guarantee with no expiry date.

- h) Council may use all or part of the Infrastructure Bond as well as the Property Damage Security Deposit to meet the cost of removing or completing the works if they do not meet Council's requirements.
- i) The Deposit/Bond will not be released until Council has inspected the site and is satisfied that the Works have been completed in accordance with Council approved drawings and to Council requirements.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: *Road* has the same meaning as in the *Roads Act 1993*.

Note: The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*.

Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Roads Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Note: See condition K24 in *Section K. Advising*s of this Consent titled *Roads Act Application*.
Standard Condition: C13 (Autotext CC13)

C.5 Utility Services Generally

The Construction Certificate plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

C.6 Provision for Energy Supplies

The Applicant must provide to the Certifying Authority a letter from Austgrid setting out Austgrid's requirements relative to the provision of electricity/gas supply to the development.

Any required electricity pillar and/or substation must be located within the boundaries of the site. Where an electricity pillar and electricity substation required within the site but no provision has been made to place it within the building and such substation has not been detailed upon the approved development consent plans an application under section 4.55 of the *Act* is required to be submitted to Council. Council will assess the proposed location of the required electricity pillar and/or substation.

The Construction Certificate plans and specifications, required to be submitted pursuant to clause 139 of the *Regulation*, must detail provisions to meet the requirements of Austgrid.

Where the electricity pillar and/or substation is required, the Construction Certificate plans and specifications must provide:

- a) A setback not less than 3m from the road boundary and dense landscaping of *local native plants* to screen the electricity pillar and/or substation from view within the streetscape.
- b) A setback not less than 3m from any other site boundary (fire source feature) and not within the areas required to be kept clear of obstructions to vehicle visibility pursuant to clause 3.2.4 of AS2890.1-1993(See: Figures 3.2 and 3.3).
- c) A setback to and not within the drip line of any existing tree required to be retained.
- d) A setback not less than the 10m from any NSW Fire Brigade booster connection as prescribed by clause 5.6.3(d)(iii) of AS 2419.1-1994 or be separated from any booster connections by a construction with a fire resistance rating of not less than FRL 90/90/90 for a distance of not less than 2 m each side of and 3 m above the upper hose connections in the booster assembly pursuant to clause 5.6.3(c)(ii) of AS 2419.1-1994, and

- e) The Owner shall dedicate to the appropriate energy authority, free of cost, an area of land adjoining the street alignment to enable an electricity pillar and/or substation to be established, if required. The size and location of the electricity pillar and/or substation is to be in accordance with the requirements of the appropriate energy authority and Council. The opening of any access doors must not intrude onto the public road reserve.

Note: If the electricity pillar and/or substation is not located within the building its location, screening vegetation, all screen walls or fire separating walls must have been approved by the grant of development consent or amended development consent prior to the issue of any *Construction Certificate* for those works. Documentary evidence of compliance, including correspondence from the energy authority is to be provided to the Certifying Authority prior to issue of the Construction Certificate. The Certifying Authority must be satisfied that the requirements of energy authority have been met prior to issue of the Construction Certificate.

Note: This condition has been imposed because the application fails to provide sufficient detail (either by plans or by the Statement of Environmental Effects) demonstrating that provision has been made to Ausgrid's satisfaction for the provision of electricity supply to the building. Nevertheless, Council has no reason to believe that provision cannot be reasonably made for electricity to service the development.

Note: Where it is proposed to shield any booster connection or any building from any electricity pillar and/or substation pursuant to clause 5.6.3(c)(ii) of AS 2419.1-1994 or by fire resisting construction under the BCA respectively and this construction has not been detailed upon the approved development consent plans such works should be considered inconsistent with consent pursuant to clause 145 of the *Regulation*. The Applicant must lodge with Council details for any such construction pursuant to section 4.55 of the *Act* to allow assessment under section 4.15 of the *Act*.

Note: Electricity pillar and/or Substations must not be located within the minimum sight distance at driveway entrances under Australian Standard AS/NZS 2890 (Set)-2004 *Parking Facilities Set whether such driveways service the site or any adjoining land*.
Standard Condition: C21

C.7 Soil and Water Management Plan – Submission and Approval

The Principal Contractor or Owner-builder must submit to the Certifying Authority a soil and water management plan complying with:

- a) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b) “*Managing Urban Stormwater - Soils and Construction*” 2004 published by the NSW Government (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence.

The Certifying Authority must be satisfied that the soil and water management plan complies with the publications above prior to issuing any Construction Certificate.

Note: This condition has been imposed to eliminate potential water pollution and dust nuisance.

Note: The International Erosion Control Association – Australasia www.austieca.com.au lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

Note: The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publication can be downloaded from www.woollahra.nsw.gov.au, and *The Blue Book* is available at www.environment.nsw.gov.au/stormwater/publications.htm.

Note: Pursuant to clause 161(1)(a)(5) of the *Regulation* an Accredited Certifier may be satisfied as to this matter.
Standard Condition: C25

C.8 Structural Adequacy of Existing Supporting Structures

A certificate from a professional engineer (structural engineer), certifying the adequacy of any existing supporting structures to support the additional loads proposed to be imposed by the development, must be submitted with the Construction Certificate application.

Note: This condition is imposed to ensure that the existing structures are able to support the additional loads proposed.

Standard Condition: C35 (Autotext CC35)

C.9 Professional Engineering Details

The Construction Certificate plans and specifications, clause 7 of the *Environmental Planning and Assessment (Development Certification and Fire Safety) Regulation 2021*, must include detailed professional engineering plans and/or specifications for all structural, electrical, hydraulic, hydrogeological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the Certifying Authority with the application for any Construction Certificate.

Note: This does not affect the right of the developer to seek staged Construction Certificates.

Standard Condition: C36

C.10 Engineer Certification

This development consent does NOT give approval to any works outside the boundaries of the subject property including any underpinning works to any structures on adjoining properties and Council's property.

Any structural design is not to incorporate any temporary or permanent underpinning works or ground anchors, bolts, etc which encroach outside the boundaries of the subject property. Engineer certification to this effect shall be submitted to the Certifying Authority prior to issue of any Construction Certificate.

C.11 Geotechnical and Hydrogeological Design, Certification and Monitoring

Prior to the issue of the Construction Certificate, the applicant must submit, for approval by the Principal Certifier, a detailed geotechnical report prepared by a geotechnical engineer with National Engineering Register (NER) credentials in accordance with Council's DCP and Councils document "*Guidelines for Preparation of Geotechnical and Hydrogeological Reports*". The report must include a Geotechnical / Hydrogeological Monitoring Program together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a professional engineer, who is suitably qualified and experienced in geotechnical and hydrogeological engineering.

These details must be certified by the professional engineer to:

- a) Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure,
- b) Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater),

- c) Provide details of cut-off walls or similar controls prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time,
- d) Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e) Provide a Geotechnical and Hydrogeological Monitoring Program that:
 - will detect any settlement associated with temporary and permanent works and structures,
 - will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like),
 - will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity),
 - will detect groundwater changes calibrated against natural groundwater variations,
 - details the location and type of monitoring systems to be utilised,
 - details the pre-set acceptable limits for peak particle velocity and ground water fluctuations,
 - details recommended hold points to allow for the inspection and certification of geotechnical and hydrogeological measures by the professional engineer, and
 - details a contingency plan.

Standard Condition: C40 (Autotext: CC40)

C.12 Ground Anchors

This development consent does NOT give approval to works or structures over, on or under adjoining properties, public roads and/or footpaths. Prior written consent must be obtained from all relevant adjoining property owner(s) for the use of any Ground Anchors extending beyond the boundaries of the subject property.

The use of permanent ground anchors under Council land is not permitted. Temporary ground anchors under Council's land may be permitted, in accordance with Council's "Rock Anchor Policy", where alternative methods of stabilisation would not be practicable or viable, and where there would be benefits in terms of reduced community impact due to a shorter construction period, reduced disruption to pedestrian and vehicular traffic on adjacent public roads, and a safer working environment.

If temporary ground anchors under Council land are proposed, a separate application, including payment of fees, must be made to Council under Section 138 of the *Roads Act 1993*. Application forms and Council's "Rock Anchor Policy" are available from Council's website. Approval may be granted subject to conditions of consent. Minimum Four weeks should be allowed for assessment.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: *Road* has the same meaning as in the *Roads Act 1993*.

Note: Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the *Roads Act 1993* for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

Standard Condition: C41 (Autotext: CC41)

C.13 Parking Facilities

Before the issue of any construction certificate, the construction certificate plans and specifications required under clause 7 of the Development Certification and Fire Safety Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS/NZS 2890.1: Parking Facilities - Off-Street Car Parking.

The plans must satisfy the following requirement(s):

- a) Sight distance requirements must comply with Clause 3.2.4 and Figure 3.3 of AS2890.1:2004;
- b) Traffic light system be incorporated to manage traffic flow between the ground floor and basement level. Priorities should be given to vehicles entering the car park to minimise conflicts with traffic along the frontage road;
- c) The maximum gradient of the access driveway should be 1 in 20 (5%) as per Clause 3.3 of AS/NZS 2890.1 and should be clearly depicted in the architectural drawings;
- d) A 2m x 2.5m sight splay be provided along both sides of the access driveway, as per Clause 3.2.4 and Figure 3.2 of AS/NZS2890.1:2004. Any structure within the splay area including landscape should be lower than 600mm to ensure visibility
- e) Details including dimensions, type, model and manufacturers specification of the proposed turntable should be provided in the detailed plans,
- f) All parking spaces shall have minimum dimensions of 2.4m x 5.4m, clear of any obstructions, to comply with AS2890.1. If the side boundary of a parking space is a wall, or if there are obstructions such as columns restricting door opening, 300mm shall be added to the width of the space,
- g) Driveway and vehicular access ramp shall be designed to provide adequate ground clearance to the underside of B99 vehicles.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The Principal Certifier has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.

Standard Condition: C45 (Autotext: CC45)

C.14 Stormwater Management Plan

Prior to issue of the Construction Certificate, the applicant must submit, for approval by the Principal Certifier, detailed stormwater management plans prepared by a suitably qualified and experienced civil engineer, which include the following:

- a) General design in accordance with stormwater management plans, referenced 220537 prepared by SMART Structures Australia, dated 16/08/2023, other than amended by this and other conditions,
- b) The Permissible Site Discharge (PSD) for the proposed development must not exceed 23.69 L/s which includes any stormwater runoff that is bypassing the on-site detention (OSD) system. In this regard, the discharge orifice from the OSD system must be further reduced with additional storage to be provided, as determined by using the Drains model, to compensate for the stormwater runoff from the bypassing area so that the total discharge leaving the site is limited to 23.69 l/s for storms up to and including the 1% AEP events,
- c) In order to prevent any backwater effects, invert level of the proposed OSD discharge orifice must be designed so that it is set above the HGL of the downstream drainage system where the top of kerb level at the connecting kerb inlet pit is to be used as the tailwater level when connecting into the road drainage system,
- d) The discharge of stormwater from the site, by direct connection, to Council's existing kerb inlet pit located within the frontage of the site on Boronia Road,

- e) The installation of a pumpout system with a minimum storage capacity of 3.4m³ to comply with Section 8 of AS3500.3,
- f) The installation of stormwater filtration /treatment system which includes but not limited to the installation of 6m³ rainwater tank, 2 x 690PSorb StormFilter and 2 x OceanGuard 200 by Ocean Protect to achieve the minimum the water quality targets stipulated in Chapter E2.2.3 of Council's DCP,
- g) All below ground structures are to be fully tanked to ensure subsoil drainage/seepage water is not collected and discharged to the kerb and gutter in accordance with Chapter E2.2.5 and 2.2.10 of the Council's DCP. Notation to this requirement shall be clearly depicted on the drawings,
- h) Internal stormwater drainage including but not limited to gutters and downpipes, pipes and pits are to be designed for rainfall intensities up to and including the 1% AEP event if an unimpeded overland flow path to the street drainage system is not available. Design details and calculations must be included in the stormwater management plans,
- i) Dimensions of all drainage pits and access grates must comply with AS3500.3,
- j) Compliance the objectives and performance requirements of the BCA,
- k) Any rainwater tank (See Note below) required by BASIX commitments including their overflow connection to the Stormwater Drainage System, and
- l) General compliance with the Council's Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management.

On-site Stormwater Detention (OSD) Requirements:

The minimum Site Storage Requirements ("SSR") for the required on-site stormwater detention (OSD) system must be 13.94m³ or determined by a Drains model whichever is greater and the Permissible Site Discharge (PSD) for the proposed development must not exceed 23.69 L/s.

The *Stormwater Management Plan* must also include the following specific requirements:

Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Australian Government publication, *Australian Rainfall and Run-off, 2019* edition or most current version thereof. It must include:

- a) All pipe layouts, dimensions, grades, lengths and material specification,
- b) Location of proposed rainwater tanks,
- c) All invert levels reduced to Australian Height Datum (AHD),
- d) Location and dimensions of all drainage pits,
- e) Point and method of connection to Councils drainage infrastructure, and
- f) Overland flow paths over impervious areas.

On-site Stormwater Detention (OSD) details:

- a) Any potential conflict between existing and proposed trees and vegetation.
- b) Internal dimensions and volume of the proposed detention storage.
- c) Diameter of the outlet to the proposed detention storage basin.
- d) Plans, elevations and sections showing the detention storage basin invert level, centre-line level of outlet, top water level, finished surface level and adjacent structures.
- e) Details of access and maintenance facilities.
- f) Construction and structural details of all tanks and pits and/or manufacturer's specifications for proprietary products.
- g) Details of the emergency overland flow-path (to an approved Council drainage point) in the event of a blockage to the on-site detention system.
- h) Non-removable fixing details for orifice plates where used.

Rainwater Reuse System details:

- a) Any potential conflict between existing and proposed trees and vegetation,
- b) Internal dimensions and volume of the proposed rainwater storage,
- c) Plans, elevations and sections showing the rainwater tanks, finished surface level and adjacent structures,
- d) Details of access and maintenance facilities,
- e) Construction and structural details of all tanks and pits and/or manufacturer's specifications for proprietary first flush products,
- f) Details of the emergency overland flow-path (to an approved Council drainage point) in the event of a blockage to the rainwater tanks.

For the proposed stormwater connection to the Council's drainage infrastructure, separate approval under Section 138 of the *Roads Act 1993* must be obtained from Council for those works prior to the issue of any Construction Certificate.

All Stormwater Drainage System work within any road or public place must comply with Woollahra Municipal Council's *Specification for Roadworks, Drainage and Miscellaneous Works (2012)*.

Note: This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

Note: The collection, storage and use of rainwater is to be in accordance with *Standards Australia HB230-2008 "Rainwater Tank Design and Installation Handbook"*.
Standard Condition: C.51 (Autotext CC51)

C.15 Swimming and Spa Pools – Child Resistant Barriers

The Construction Certificate plans and specifications required by clause 139 of the *Regulation* must demonstrate compliance (by showing the proposed location of all child-resistant barriers and the resuscitation sign) with the provisions of the *Swimming Pools Act 1992* and the Building Code of Australia.

Approval is not granted for the modification of any boundary fencing beyond what is authorised by the stamped approved plans, as modified by any condition of consent or what is permitted to be carried out as 'exempt development' pursuant to *State Environmental Planning Policy (Exempt and Complying Development Codes) 2008*.

Note: A statement to the effect that isolation swimming pool fencing complying with AS1926 will be installed does not satisfy this condition. The location of the required barriers and the sign must be detailed upon the *Construction Certificate* plans.
Standard Condition: C55 (Autotext CC55)

C.16 Swimming and Spa Pools – Backwash

The Construction Certificate plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must detail the connection of backwash to Sydney Waters sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: The plans must show the location of Sydney Water's sewer, the yard gully or any new connection to the sewer system including a detailed cross section of the connection complying with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: The discharge of backwash water to any stormwater system is water pollution and an offence under the *Protection of the Environment Operations Act 1997*. The connection of any backwash pipe to any stormwater system is an offence under the *Protection of the Environment Operations Act 1997*.
Standard Condition: C56 (Autotext CC56)

C.17 Electric vehicle circuitry and electric vehicle charging point requirements

An accurate electrical plan and specifications for all off-street car parking must be prepared by a suitably qualified person, demonstrating the following;

- a) That each off-street car parking space will be provided with electrical circuitry to support the installation of a Level 2 electric vehicle charger point. The construction certificate plans are to:
 - Identify the power capacity to each car parking space.
 - identify the load management system on each level of parking such as a distribution board.
 - identify the conduit system to allow each car space to install an electric vehicle charger point - such as cable trays and/or buried cables underground. This system should allow future installation of cabling to power electric vehicle charger points and allow internet access (run Ethernet cable or install 4G modem).
- b) A minimum of one Level 2 electric charger must be provided and Level 2 chargers must be provided to not less than 10% of all car parking spaces. The location of all electric vehicle chargers must be shown on the construction certificate plans.
- c) The certifier must be satisfied that the electrical plans and specifications are consistent with (a) and (b) prior to the issue of the construction certificate.

Note: The minimum electric circuitry requirements for 'Level 2' electric vehicle charging points are:

- a) Privately available spaces including visitor spaces: 'Level 2' slow – single phase 7kW power; and
- b) Publicly available spaces: 'Level 2' fast – three-phase 11-22kW power
Standard Condition: C57 (Autotext CC57)

C.18 Acoustic Certification of Mechanical Plant and Equipment

The Construction Certificate plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must be accompanied by a certificate from a professional engineer (acoustic engineer) certifying that the noise level measured at any boundary of the site at any time while the proposed mechanical plant and equipment is operating will not exceed the *background noise level*. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed *background noise level*, at any time.

The *background noise level* is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the $L_{A90, 15 \text{ minute}}$ level measured by a sound level meter.

Where sound attenuation is required this must be detailed.

Note: Further information including lists of Acoustic Engineers can be obtained from:

1. **Australian Acoustical Society**—professional society of noise-related professionals
www.acoustics.asn.au
2. **Association of Australian Acoustical Consultants**—professional society of noise related professionals
www.aaac.org.au.
Standard Condition: C62 (Autotext CC62)

C.19 Tree Management Plan

The *Construction Certificate* plans and specifications shall show the following information:

- a) Trees to be numbered in accordance with these conditions:
 - shaded green where required to be retained and protected
 - shaded red where authorised to be removed
 - shaded yellow where required to be transplanted

- shaded blue where required to be pruned
- b) References to applicable tree management plan, arborists report or transplant method statement.

This plan shall be kept on site until the issue of the final occupation certificate

D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Compliance with Building Code of Australia and insurance requirements under the [Home Building Act 1989](#)

For the purposes of section 4.17(11) of the *Act*, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a) that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b) in the case of residential building work for which the [Home Building Act 1989](#) requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a) to the extent to which an exemption is in force under the *Home Building Regulation 2004*, or
- b) to the erection of a temporary building.

In this condition, a reference to the BCA is a reference to that code as in force on the date the application for the relevant Construction Certificate is made.

Note: This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the *Home Building Act 1989*. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.

Note: All new guttering is to comply with the provisions of Part 3.5.2 of the Building Code of Australia.
Standard Condition: D1 (Autotext DD1)

D.2 Dilapidation Reports for existing buildings

Dilapidation surveys and dilapidation reports shall be conducted and prepared by a *professional engineer* (structural) for all buildings and/or structures that are located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration as determined applicable by a Structural Engineer.

These properties must include (but is not limited to):

No. 20 Boronia Road
No. 24 Boronia Road
No. 15 Blaxland Road

The dilapidation reports must be completed and submitted to the *Certifying Authority* for approval. A copy of the approved reports shall be submitted to Council with the *Notice of Commencement* prior to the commencement of any *development work*.

Where excavation of the site will extend below the level of any immediately adjoining building the *principal contractor* or *owner builder* must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the *notice of commencement* required by S81A(2) of the *Act* not less than two (2) days prior to the commencement of any work.

Note: The reasons for this condition are:

- To provide a record of the condition of buildings prior to development being carried out
 - To encourage developers and its contractors to use construction techniques that will minimise the risk of damage to buildings on neighbouring land
- Also refer to the Dilapidation Report Advising for more information regarding this condition
Standard Condition: D4 (Autotext DD4)

D.3 Adjoining Buildings Founded on Loose Foundation Materials

The Principal Contractor must ensure that a professional engineer determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The professional engineer (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the Principal Contractor must comply with any reasonable direction of the professional engineer.

Note: A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.
Standard Condition: D6 (Autotext DD6)

D.4 Construction Management Plan

Before any site work commences, and as a result of the site constraints, limited space and access, a Construction Management Plan (CMP) is to be submitted to Council for approval. Also, due to lack of on-street parking a Work Zone may be required during construction. An application for the CMP must be submitted for approval, and all associated application fees must be paid.

The CMP must be submitted as a self-contained document that outlines the nature of the construction project and as applicable, include the following information:

- a) Detail the scope of the works to be completed including details of the various stages, e.g. demolition, excavation, construction etc. and the duration of each stage.
- b) Identify local traffic routes to be used by construction vehicles.
- c) Identify ways to manage construction works to address impacts on local traffic routes, particularly during school pick-up and drop-off hours.
- d) Identify other developments that may be occurring in the area and identify ways to minimise the cumulative traffic impact of these developments. Should other developments be occurring in close proximity (500m or in the same street) to the subject site, the developer/builder is to liaise fortnightly with the other developers/builders undertaking work in the area in order to minimise the cumulative traffic and parking impacts of the developments.
- e) Detail how construction workers will travel to and from the site and parking arrangements for those that drive.
- f) Identify any proposed road closures, temporary traffic routes, loss of pedestrian or cyclist access, or reversing manoeuvres onto a public road, and provide Traffic Control Plans (TCPs) prepared by an accredited RMS Red or Orange card holder to manage these temporary changes.
- g) Detail the size (including dimensions), numbers and frequency of arrival of the construction vehicles that will service the site for each stage of works.
- h) Provide for the standing of vehicles during construction.
- i) If construction vehicles are to be accommodated on the site, provide a scaled drawing showing where these vehicles will stand and the vehicle swept path to show that these vehicles can access and egress the site in a forward direction (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.).

- j) If trucks are to be accommodated on Council property, provide a scaled drawing showing the location of any proposed Works Zone (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.).
- k) Show the location of any site sheds and any anticipated use of cranes and concrete pumps and identify the relevant permits that will be required.
- l) If a crane/s are to be accommodated on site, detail how the crane/s will be erected and removed, including the location, number and size of vehicles involved in the erection/removal of the crane/s, the duration of the operation and the proposed day and times, any full or partial road closures required to erect or remove the crane/s and appropriate Traffic Control Plans (TCPs) prepared by an approved RMS Red or Orange Card holder.
- m) Make provision for all materials, plant, etc. to be stored within the development site at all times during construction.
- n) State that any oversized vehicles proposed to operate on Council property (including Council approved Works Zones) will attain a Permit to StandPlant on each occasion (Note: oversized vehicles are vehicles longer than 7.5m or heavier than 4.5T.)
- o) Show the location of any proposed excavation and estimated volumes.
- p) When demolition, excavation and construction works are to be undertaken on school days, all vehicular movements associated with this work must only be undertaken between the hours of 9.30am and 2.30pm, in order to minimise disruption to the traffic network during school pick up and drop off times.
- q) Show the location of all Tree Protection (Exclusion) zones (Note: storage of building materials or access through Reserve will not be permitted without prior approval by Council).

Notes:

- A minimum of eight weeks will be required for assessment. Site work must not commence until the Construction Management Plan is approved.
- Failure to comply with this condition may result in fines and proceedings to stop work.
- Council and NSW Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Eastern Suburbs Police Area Command.
- If you partial or full close a road without compliance with Council and NSW Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution.
- Traffic Supervisors at the Eastern Suburbs Police Area Command can be contacted on eastsubtraffic@police.nsw.gov

Condition Reason: To facilitate the efficient operation of construction projects, minimise traffic disruption, and protect the public, and the surrounding environment, during site works and construction

D.5 Works (Construction) Zone – Approval and Implementation

If the Construction Management Plan relies upon a Works Zone, before any site work commences, a Works Zone application must be made.

If the works zone is approved, all fees for the Works Zone must be paid before it can be installed.

All Works Zone signs must have been erected by Council to permit enforcement of the Works Zone by Council's Rangers and NSW Police before commencement of any site work. Signs are not erected until full payment of Works Zone fees is made.


Note: A minimum of four to six weeks must be allowed (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under clause 20 of the Transport Administration (General) Regulation 2018 to exercise those functions delegated by Transport for New South Wales under section 31(3) of the Transport Administration Act 1988.

Note: The enforcement of the Works Zone is at the discretion of Council's Rangers and the NSW Police Service. Any breach of the Works Zone must be reported to either Council or the NSW Police Service.

Standard Condition: D10 (Autotext DD10)


D.6 Security Fencing, Hoarding (including 'Creative Hoardings') and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

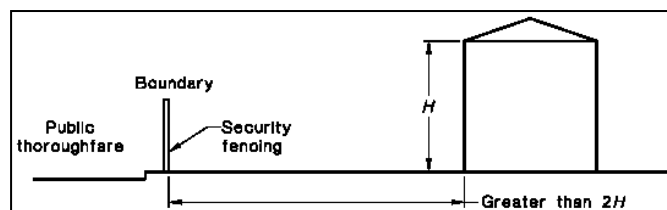

Type A Hoarding

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8m adjacent to the thoroughfare.

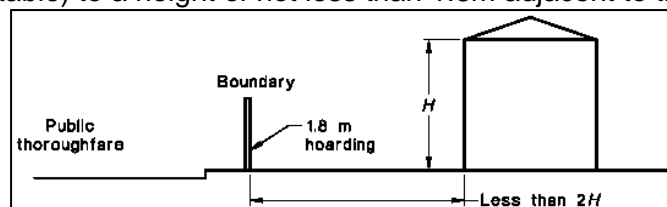

Type B Hoarding


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an overhead protective structure and the facing facade protected by heavy-duty scaffolding, unless either:

- the vertical height above footpath level of the structure being demolished is less than 4.0m; or
- the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must:

- extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary,
- have a clear height above the footpath of not less than 2.1m,

- c) terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5m above the platform surface, and
- d) together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

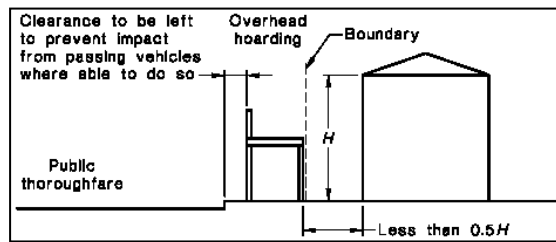

The Principal Contractor or Owner-builder must ensure that overhead protective structures are installed and maintained in accordance with the NSW “Code of Practice - Overhead Protective Structures 1995”. This is code available at www.safework.nsw.gov.au/data/assets/pdf_file/0008/52883/Overhead-protective-structures-Code-of-practice.pdf

All Hoardings

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Hoardings on Public Land including ‘Creative Hoardings’

The Principal Contractor or Owner-builder must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

A creative hoarding (i.e. an approved artwork or historic image affixed to the hoarding) is required if the hoarding meets the criteria in Council’s Creative Hoardings Policy (adopted March 2020). The cost of printing and affixing the creative hoarding is the responsibility of the Principal Contractor or Owner-builder. The Creative Hoardings Policy can be downloaded from Council’s website www.woollahra.nsw.gov.au

Note: The Principal Contractor or Owner must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.

Note: Council seeks to increase public art in the public domain by requiring artwork or historic images on hoardings located on public land. Under the Creative Hoardings Policy an application for a hoarding proposed on public land will require an approved artwork or historic image affixed to the hoarding if the hoarding meets the criteria in section 3 of the Policy:

- A. Hoardings proposed on land zoned B2 Local Centre, or B4 Mixed Use, or SP2 Infrastructure under Woollahra Local Environmental Plan 2014 AND erected for 8 weeks or more
OR
- B. Hoardings proposed on land located along a State classified road (regardless of the zone) AND erected for 8 weeks or more
OR
- C. Hoardings proposed in any other location than that referred to in A. and B. above AND erected for 12 weeks or more, except where:
 - i. the capital investment value of the work to which the hoarding relates is less than \$1 million
OR
 - ii. the land is zoned R2 Low Density Residential
OR
 - iii. the land is zoned R3 Medium Density Residential and the hoarding located in a lane or street that does not have through traffic (eg a cul-de-sac or no through road).

Artwork and historic images for the hoardings are assessed and approved in accordance with the Creative Hoardings Policy. Details of the artwork or images proposed to be affixed to the hoardings must be submitted with Council's form "Application for a permit to use a footpath for the erection of a hoarding/scaffolding".

The Creative Hoardings Policy can be downloaded from www.woollahra.nsw.gov.au or for more information contact Council's Cultural Development Team.

Standard Condition: D11 (Autotext DD11)

D.7 Site Signs

The Principal Contractor or Owner-builder must ensure that the sign/s required by clauses 98A and 227A of the *Regulation* is/are erected and maintained at all times.

Clause 98A of the *Regulation* provides:

Erection of signs

- For the purposes of section 4.17(11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
- A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - a. showing the name, address and telephone number of the Principal Certifier for the work, and
 - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - c. stating that unauthorised entry to the work site is prohibited.
- Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
- This clause does not apply in relation to Crown building work that is certified, in accordance with section 6.28 of the *Act*, to comply with the Building Code of Australia.

Clause 227A of the *Regulation* provides:

Signs on development sites

If there is a person who is the Principal Certifier or the Principal Contractor for any building work, subdivision work or demolition work authorised to be carried out on a site by a development consent or complying development certificate:

- Each such person MUST ensure that a rigid and durable sign showing the person's identifying particulars so that they can be read easily by anyone in any public road or other public place adjacent to the site is erected in a prominent position on the site before the commencement of work, and is maintained on the site at all times while this clause applies until the work has been carried out.

Note: Clause 227A imposes a penalty exceeding \$1,000 if these requirements are not complied with.

Note: If Council is appointed as the Principal Certifier it will provide the sign to the Principal Contractor or Owner-builder who must ensure that the sign is erected and maintained as required by clause 98A and clause 227A of the *Regulation*.

Standard Condition: D12 (Autotext DD12)

D.8 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a) must be a standard flushing toilet, and
- b) must be connected to a public sewer, or

- c) if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the Council, or
- d) if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the Council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

accredited sewage management facility means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

approved by the Council means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

public sewer has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.
sewage management facility has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

Note: This condition does not set aside the requirement to comply with SafeWork NSW requirements.
Standard Condition: D13 (Autotext DD13)

D.9 Erosion and Sediment Controls – Installation

The Principal Contractor or Owner-builder must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan if required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” 2004 published by the NSW Government (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence.

Note: The International Erosion Control Association – Australasia (www.austieca.com.au/) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

Note: The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication can be downloaded from www.woollahra.nsw.gov.au and *The Blue Book* is available at www.environment.nsw.gov.au/stormwater/publications.htm

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the *Act* and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”

Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.
Standard Condition: D14 (Autotext DD14)

D.10 Building - Construction Certificate, Appointment of Principal Certifier, Appointment of Principal Contractor and Notice of Commencement (Part 6, Division 6.3 of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a) A Construction Certificate for the building work has been issued by the consent authority, the Council (if the Council is not the consent authority) or an accredited Certifier, and
- b) The person having the benefit of the development consent has:
 - appointed a Principal Certifier for the building work, and
 - notified the Principal Certifier that the person will carry out the building work as an Owner-builder, if that is the case, and
- c) The Principal Certifier has, no later than 2 days before the building work commences:
 - notified the consent authority and the Council (if the Council is not the consent authority) of his or her appointment, and
 - notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- d) The person having the benefit of the development consent, if not carrying out the work as an Owner-builder, has:
 - appointed a Principal Contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - notified the Principal Certifier of any such appointment, and
 - unless that person is the Principal Contractor, notified the Principal Contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - given at least 2 days' notice to the Council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 1.4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 6.1 of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 6.6(2) of the *Act* (including the need for a Construction Certificate) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: Construction Certificate Application, PC Service Agreement and Notice of Commencement forms can be downloaded from Council's website www.woollahra.nsw.gov.au

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 6.6(2) of the *Act*.
Standard Condition: D15 (Autotext DD15)

D.11 Notification of [Home Building Act 1989](#) requirements

- a) For the purposes of section 4.17(11) of the *Act*, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the [Home Building Act 1989](#).
- b) Residential building work within the meaning of the [Home Building Act 1989](#) must not be carried out unless the Principal Certifier for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
 - In the case of work for which a Principal Contractor is required to be appointed:
 - the name and licence number of the Principal Contractor, and
 - the name of the insurer by which the work is insured under Part 6 of that *Act*,
 - In the case of work to be done by an Owner-builder:
 - the name of the Owner-builder, and
 - if the Owner-builder is required to hold an Owner-builder permit under that *Act*, the number of the Owner-builder permit.
- c) If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date,

further work must not be carried out unless the Principal Certifier for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.

- d) This clause does not apply in relation to Crown building work that is certified, in accordance with section 6.28 of the *Act*, to comply with the Building Code of Australia.
Standard Condition: D17 (Autotext DD17)

E. Conditions which must be satisfied during any development work

E.1 Compliance with BCA and Insurance Requirements under the [Home Building Act 1989](#)

For the purposes of section 4.17(11) of the *Act*, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a) that the work must be carried out in accordance with the requirements of the Building Code of Australia (BCA),
b) in the case of residential building work for which the [Home Building Act 1989](#) requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a) to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the *Regulation*, or
b) to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant Construction Certificate is made.

Note: All new guttering is to comply with the provisions of Part 3.5.2 of the Building Code of Australia.
Standard Condition: E1 (Autotext EE1)

E.2 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—2001: *The Demolition of Structures*.
Standard Condition: E2 (Autotext EE2)

E.3 Compliance with Construction Management Plan

All development activities and traffic movements must be carried out in accordance with the approved Construction Management Plan (CMP). All controls in the CMP must be maintained at all times. A copy of the CMP must be kept on-site at all times and made available to the Principal Certifier or Council on request.

Note: Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.
Standard Condition: E3 (Autotext EE3)

E.4 Requirement to Notify about New Evidence

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifier.

Standard Condition: E4 (Autotext EE4)

E.5 Critical Stage Inspections

Critical stage inspections must be called for by the Principal Contractor or Owner-builder as required by the Principal Certifier, any PC service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the Principal Certifier is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*.

Critical stage inspections means the inspections prescribed by the *Regulations* for the purposes of section 6.5 of the *Act* or as required by the Principal Certifier and any PC Service Agreement.

Note: The PC may require inspections beyond mandatory critical stage inspections in order that the PC be satisfied that work is proceeding in accordance with this consent.

Note: The PC may, in addition to inspections, require the submission of Compliance Certificates, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5 (Autotext EE5)

E.6 Hours of Work –Amenity of the Neighbourhood

- a) No *work* must take place on any Sunday or public holiday.
- b) No *work* must take place before 7am or after 5pm any weekday.
- c) No *work* must take place before 7am or after 1pm any Saturday.
- d) The following *work* **must not** take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday:
 - (i) piling,
 - (ii) piercing,
 - (iii) rock or concrete cutting, boring or drilling,
 - (iv) rock breaking,
 - (v) rock sawing,
 - (vi) jack hammering, or
 - (vii) machine excavation.
- e) No loading or unloading of material or equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday.
- f) No operation of any equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday.
- g) No rock excavation being cutting, boring, drilling, breaking, sawing , jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

Note: The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

Note: Each and every breach of this condition by any person may be subject to a separate penalty infringement notice or prosecution.

Note: The delivery and removal of plant, equipment and machinery associated with wide loads subject to RMS and NSW Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

Note: Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2017*.

Note: NSW EPA Noise Guide is available at www.epa.nsw.gov.au/noise/nqlg.htm
Standard Condition: E6 (Autotext EE6)

E.7 Public Footpaths – Safety, Access and Maintenance

The Principal Contractor or Owner-builder and any other person acting with the benefit of this consent must:

- a) Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b) Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c) Not use the road or footway for any *work*.
- d) Keep the road and footway in good repair free of any trip hazard or obstruction.
- e) Not stand any plant and equipment upon the road or footway.
- f) Provide a clear safe pedestrian route a minimum of 1.5m wide.
- g) Protect heritage listed street name inlays in the footpath which are not to be removed or damaged during development.

This condition does not apply to the extent that a permit or approval exists under the section 148B of the *Road Transport Act 2013*, section 138 of the *Roads Act 1993* or section 68 of the *Local Government Act 1993* except that at all time compliance is required with:

- a) Australian Standard AS 1742 (Set): *Manual of uniform traffic control devices* and all relevant parts of this set of standards.
- b) Australian Road Rules.

Note: Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the NSW Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose.

Note: Section 138 of the *Roads Act 1993* provides that a person must not:

- erect a structure or carry out a work in, on or over a public road, or
- dig up or disturb the surface of a public road, or
- remove or interfere with a structure, work or tree on a public road, or
- pump water into a public road from any land adjoining the road, or
- connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

Note: Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the Council including:

- Part C Management of waste:
 - a. For fee or reward, transport waste over or under a public place
 - b. Place waste in a public place
 - c. Place a waste storage container in a public place.
- Part E Public roads:
 - a. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
 - b. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.

Standard Condition: E7 (Autotext EE7)

E.8 Maintenance of Environmental Controls

The Principal Contractor or Owner-builder must ensure that the following monitoring, measures and controls are maintained:

- a) erosion and sediment controls,
- b) dust controls,

- c) dewatering discharges,
- d) noise controls,
- e) vibration monitoring and controls,
- f) ablutions.

Standard Condition: E11

E.9 Compliance with Geotechnical / Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the Geotechnical / Hydrogeological Monitoring Program and any oral or written direction of the supervising professional engineer.

The Principal Contractor and any sub-contractor must strictly follow the Geotechnical / Hydrogeological Monitoring Program for the development including, but not limited to:

- a) the location and type of monitoring systems to be utilised,
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the professional engineer, and
- c) the contingency plan.

Note: The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the development application to be appointed as the professional engineer supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.

Standard Condition: E12 (Autotext EE12)

E.10 Support of Adjoining Land and Buildings

A person must not do anything on or in relation to the site (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

Note: This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the Principal Contractor or Owner-builder must obtain:

- a. the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b. an access order under the *Access to Neighbouring Land Act 2000*, or
- c. an easement under section 88K of the *Conveyancing Act 1919*, or
- d. an easement under section 40 of the *Land and Environment Court Act 1979* as appropriate.

Note: Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

Note: Clause 20 of the *Roads Regulation 2008* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the *Roads Act 1993* for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

Note: The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, Crown land under Council's care control or management, or any community or operational land as defined by the *Local Government Act 1993*. Standard Condition: E13 (Autotext EE13)

E.11 Vibration Monitoring

Vibration monitoring equipment must be installed and maintained, under the supervision of a professional engineer with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the professional engineer as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the professional engineer as the maximum acceptable peak particle velocity an audible alarm must activate such that the Principal Contractor and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately. Prior to the vibration monitoring equipment being reset by the professional engineer and any further work recommencing the event must be recorded and the cause of the event identified and documented by the professional engineer.

Where the event requires, in the opinion of the professional engineer, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the professional engineer as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the professional engineer to the Principal Contractor and any sub-contractor clearly setting out required work practice.

The Principal Contractor and any sub-contractor must comply with all work directions, verbal or written, given by the professional engineer.

A copy of any written direction required by this condition must be provided to the Principal Certifier within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the professional engineer, Principal Contractor and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the professional engineer to prevent any further damage and restore support to the *supported land*.

Note: *professional engineer* has the same mean as in clause A1.1 of the BCA.

Note: *building* has the same meaning as in section 1.4 of the *Act* i.e. "*building* includes part of a building and any structure or part of a structure...."

Note: *supported land* has the same meaning as in the *Conveyancing Act 1919*.
Standard Condition: E14 (Autotext EE14)

E.12 Erosion and Sediment Controls – Maintenance

The Principal Contractor or Owner-builder must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) the Soil and Water Management Plan required under this consent,
- b) "*Do it Right On Site, Soil and Water Management for the Construction Industry*" published by the Southern Sydney Regional Organisation of Councils, 2001, and
- c) "*Managing Urban Stormwater - Soils and Construction*" 2004 published by the NSW Government (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence.



Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the *Act* and/or the *Protection of the Environment Operations Act 1997* without any further warning. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”.

Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.

Standard Condition: E15 (Autotext EE15)

E.13 Disposal of Site Water During Construction

The Principal Contractor or Owner-builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from Council under section 138(1)(d) of the *Roads Act 1993*.
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act 1997*, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water.
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

Note: This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.

Standard Condition: E17 (Autotext EE17)

E.14 Site Cranes

Site crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the Principal Contractor or Owner-builder have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988 (Cth)*.

No illuminated sign(s) must be erected upon or displayed upon any site crane.

Note: Where it is proposed to swing a crane over a public place the Principal Contractor or Owner-builder must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

Note: Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the Principal Contractor or Owner-builder must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land and Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.
Standard Condition: E19 (Autotext EE19)

E.15 Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum

The Principal Contractor or Owner-builder must ensure that a registered surveyor carries out check surveys and provides survey certificates confirming the location of the building(s), ancillary works, flood protection works and the stormwater drainage system relative to the boundaries of the site and that the height of buildings, ancillary works, flood protection works and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The Principal Contractor or Owner-builder must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the Principal Certifier's satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level.
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey.
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof.
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structure, flood protection work, swimming pool or spa pool or the like.
- e) Upon the completion of formwork and steel fixing prior to pouring of any concrete for driveways showing transitions and crest thresholds confirming that driveway levels match Council approved driveway crossing levels and minimum flood levels.
- f) Stormwater drainage Systems prior to back filling over pipes confirming location, height and capacity of works.
- g) Flood protection measures are in place confirming location, height and capacity.

Note: This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent. This is critical to ensure that building are constructed to minimum heights for flood protection and maximum heights to protect views and the amenity of neighbours.

Standard Condition: E20 (Autotext EE20)

E.16 Placement and Use of Skip Bins

The Principal Contractor or Owner-builder must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 68 of the *Local Government Act 1993* to place the waste storage container in a public place; and
- b) where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules.

Note: Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.

Standard Condition: E21 (Autotext EE21)

E.17 Prohibition of Burning

There must be no burning of any waste or other materials. The burning of copper chrome arsenate (CCA) or pentachlorophenol (PCP) treated timber is prohibited in all parts of NSW.

All burning is prohibited in the Woollahra local government area.

Note: Pursuant to the *Protection of the Environment Operations (Clean Air) Regulation 2010* all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning.
Standard Condition: E22 (Autotext EE22)

E.18 Dust Mitigation

Dust mitigation must be implemented in accordance with "*Dust Control - Do it right on site*" published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

Note: "*Dust Control - Do it right on site*" can be downloaded from Council's website www.woollahra.nsw.gov.au or obtained from Council's office.

Note: Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.safework.nsw.gov.au and www.epa.nsw.gov.au. Other specific conditions and advice may apply.

Note: Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.
Standard Condition: E23 (Autotext EE23)

E.19 Compliance with Council's Specification for Roadworks, Drainage and Miscellaneous Works, Road Works and, Work within the Road and Footway

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council's *Specification for Roadworks, Drainage and Miscellaneous Works (2012)*.

The Owner, Principal Contractor or Owner-builder must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within roads and other public places.

Note: A copy of Council's *Specification for Roadworks, Drainage and Miscellaneous Works* can be downloaded from Council's website www.woollahra.nsw.gov.au
Standard Condition: E24 (Autotext EE24)

E.20 Swimming and Spa Pools – Temporary Child Resistant Barriers and other Matters

Temporary child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* and Building Code of Australia where any swimming pool or spa pool, as defined by the *Swimming Pools Act 1992*, contains more than 300mm in depth of water at any time.

Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* and the Building Code of Australia as soon as practical.

Backwash and any temporary dewatering from any swimming pool or spa pool as defined by the *Swimming Pools Act 1992* must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: This condition does not prevent Council from issuing an order pursuant to section 23 of the *Swimming Pool Act 1992* or taking such further action as necessary for a breach of this condition or the *Swimming Pools Act 1992*.
Standard Condition: E26

E.21 Site Waste Minimisation and Management – Demolition

In order to maximise resource recovery and minimise residual waste from demolition activities:

- a) the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work,
- b) an area is to be allocated for the storage of materials for use, recycling and disposal (giving consideration to slope, drainage, location of waterways, stormwater outlets, vegetation and access and handling requirements),
- c) provide separate collection bins and/or areas for the storage of residual waste,
- d) clearly 'signpost' the purpose and content of the bins and/or storage areas,
- e) implement measures to prevent damage by the elements, odour, health risks and windborne litter, and
- f) minimise site disturbance, limiting unnecessary excavation.

When implementing the SWMMP the Applicant must ensure:

- a) footpaths, public reserves and street gutters are not used as places to store demolition waste or materials of any kind without Council approval,
- b) any material moved offsite is transported in accordance with the requirements of the *Protection of the Environment Operations Act 1997*,
- c) waste is only transported to a place that can lawfully be used as a waste facility,
- d) generation, storage, treatment and disposal of hazardous waste and special waste (including asbestos) is conducted in accordance with relevant waste legislation administered by the NSW Environment Protection Authority, and relevant occupational health and safety legislation administered by SafeWork NSW, and
- e) evidence such as weighbridge dockets and invoices for waste disposal or recycling services are retained.

Note: Materials that have an existing reuse or recycling market should not be disposed of in a land fill. Reuse and recycling opportunities are decreased when asbestos is not carefully removed and segregated from other waste streams.
Standard Condition: E31 (Autotext EE31)

E.22 Site Waste Minimisation and Management – Construction

In order to maximise resource recovery and minimise residual waste from construction activities:

- a) the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work,
- b) arrange for the delivery of materials so that materials are delivered 'as needed' to prevent the degradation of materials through weathering and moisture damage,
- c) consider organising to return excess materials to the supplier or manufacturer,
- d) allocate an area for the storage of materials for use, recycling and disposal (considering slope, drainage, location of waterways, stormwater outlets and vegetation),
- e) clearly 'signpost' the purpose and content of the storage areas,
- f) arrange contractors for the transport, processing and disposal of waste and recycling and ensure that all contractors are aware of the legal requirements for disposing of waste,
- g) promote separate collection bins or areas for the storage of residual waste,
- h) implement measures to prevent damage by the elements, odour and health risks, and windborne litter,
- i) minimise site disturbance and limit unnecessary excavation,
- j) ensure that all waste is transported to a place that can lawfully be used as a waste facility, and
- k) retain all records demonstrating lawful disposal of waste and keep them readily accessible for inspection by regulatory authorities such as Council, the NSW EPA or SafeWork NSW.

Standard Condition: E32 (Autotext EE32)

E.23 Asbestos Removal

All asbestos removal work must be carried out safely according to NSW work health and safety legislation.

Where hazardous material, including bonded or friable asbestos has been identified in accordance with the conditions in Section B above, and such material must be demolished, disturbed and subsequently removed, all such works must comply with the following criteria:

- a) Be undertaken by contractors who hold a current SafeWork NSW "demolition licence" and a current SafeWork NSW "Class A licence" for friable asbestos removal.
- b) Be carried out in accordance with the relevant SafeWork NSW codes of practice.
- c) No asbestos products may be reused on the site.
- d) No asbestos laden skip or bins shall be left in any public place.

Note: This condition is imposed to protect the health and safety of persons working on the site and the public

Standard Condition: E39

E.24 Classification of Hazardous Waste

Prior to the exportation of hazardous waste (including hazardous fill or soil) from the site, the waste materials must be classified in accordance with the provision of the *Protection of the Environment Operations Act 1997* and the NSW EPA *Waste Classification Guidelines, Part 1: Classifying Waste, 2014*.

Note: This condition is imposed to ensure that where hazardous waste will be removed from a site an asbestos licensed contractor can definitively determine where the waste may be legally taken for disposal.

Standard Condition: E40

E.25 Disposal of Asbestos and Hazardous Waste

Asbestos and hazardous waste, once classified in accordance with the hazardous waste classification condition above must only be transported to waste facilities licensed to accept asbestos and appropriate classifications of hazardous waste.

Note: This condition is imposed to ensure that asbestos and other hazardous waste is disposed of lawfully under the *Protection of the Environment Operations Act 1997* and relevant NSW EPA requirements.
Standard Condition: E41

E.26 Asbestos Removal Signage

Standard commercially manufactured signs containing the words "DANGER ASBESTOS REMOVAL IN PROGRESS" measuring not less than 400mm x 300mm are to be erected in prominent visible positions on the site when asbestos is being removed.

Note: This condition is imposed to ensure awareness of any hazard to the health and safety of persons working on the site and public.
Standard Condition: E42

E.27 Notification of Asbestos Removal

In addition to the requirements for licensed asbestos removalists to give written notice to SafeWork NSW all adjoining properties and those opposite the development site must be notified in writing of the dates and times when asbestos removal is to be conducted.

The notification is to identify the licensed asbestos removal contractor and include a contact person for the site together with telephone and facsimile numbers and email addresses.

Note: This condition has been imposed to ensure that local residents are informed and have adequate communication facilitated for incidents of asbestos removal.
Standard Condition: E43

E.28 Tree Preservation

All persons must comply with Chapter E.3 – Tree Management of Council’s Development Control Plan (DCP) 2015, other than where varied by this consent. The DCP applies to any tree with a height greater than 5 metres or a diameter spread of branches greater than 3 metres.

General Protection Requirements

- a) The TPZ must be maintained during all development work unless otherwise specified within these conditions of consent.
- b) Excavation must cease where tree roots with a diameter exceeding 50mm are exposed. The *principal contractor* must procure an inspection of the exposed tree roots by an arborist with a minimum AQF Level 5 qualification. Excavation must only recommence with the implementation of the recommendations of the arborist.
- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the arborist. The arborist is to supply a detailed report to the appointed certifier.

Note: Trees must be pruned in accordance with *Australian Standard AS 4373 “Pruning of Amenity Trees”* and *WorkCover NSW Code of Practice Amenity Tree Industry*.

E.29 Replacement/Supplementary trees which must be planted

Any replacement or supplementary tree shall be grown in accordance with Tree stock for landscape use (AS 2303:2018). The replacement tree shall be planted in *deep soil landscaped area* and maintained in a healthy and vigorous condition. If the replacement tree is found to be faulty, damaged, dying or dead before it attains a size whereby it becomes a prescribed tree in accordance with Chapter E.3 of Council’s Development Control Plan, it must be replaced with another of the same species which complies with the approved Landscape Plans.

The project arborist shall document compliance with the above condition.

E.30 Hand excavation within tree root zones

Excavation undertaken within the specified radius from the trunks of the following trees shall be hand dug.

Council Ref No.	Species	Location	Radius from centre of trunk (metres)
1	Tristaniopsis laurina	Street tree	3.6m
3 – 10	Cupressus spp.	Adjacent western boundary – within rear yard of 20 Boronia Rd	2.3m

Small hand tools such as mattocks or using compressed air or water jetting only shall be used. Roots with a diameter equal to or in excess of 50mm shall not be severed or damaged unless approved in writing by the project arborist.

Mechanical excavation is permitted beyond this radius when root pruning by hand along the perimeter line is completed. Exposed roots to be retained shall be covered with mulch or a geotextile fabric and kept in a moist condition and prevented from drying out.

All root pruning must be undertaken in accordance with the Australian Standard 4373 “Pruning of Amenity Trees” and carried out by a qualified Arborist (minimum qualification of Australian Qualification Framework Level 5 or recognised equivalent).

The project arborist shall document compliance with the above condition.

E.31 Footings in the vicinity of trees

Footings for any structure within the specified radius from the trunks of the following trees shall be supported using an isolated pier and beam system.

Council Ref No.	Species	Location	Radius from centre of trunk (metres)
1	Tristaniopsis laurina	Street tree	3.6m
3 – 10	Cupressus spp.	Adjacent western boundary – within rear yard of 20 Boronia Rd	2.3m

Excavations for installation of piers shall be located so that no tree root with a diameter equal to or in excess of 50mm is severed or damaged. The smallest possible area shall be excavated which allows construction of the pier. The beam is to be placed a minimum of 100mm above ground level and is to be designed to bridge all tree roots with a diameter equal to or in excess of 50mm.

The project arborist shall document compliance with the above condition.

E.32 Installation of stormwater pipes and pits in the vicinity of trees

Excavation for the installation of stormwater pipes and pits within the specified radius from the trunks of the following trees shall be hand dug.

Council Ref No.	Species	Location	Radius from centre of trunk (metres)
1	Tristaniopsis laurina	Street tree	3.6m
3 – 10	Cupressus spp.	Adjacent western boundary – within rear yard of 20 Boronia Rd	2.3m

Any roots greater than 40mm diameter uncovered for the installation of stormwater pipes and pits shall not be severed and remain in situ bridging across the excavated trench. Pipes shall be guided under any roots greater than 40mm bridging across excavated trenches. Stormwater pits shall be positioned so that no roots greater than 40mm diameter are severed.

The project arborist shall document compliance with the above condition.

F. Conditions which must be satisfied prior to any occupation or use of the building (Part 6 of the Act and Part 8 Division 3 of the Regulation)

F.1 Occupation Certificate (section 6.9 of the Act)

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 6.10 of the *Act*) unless an Occupation Certificate has been issued in relation to the building or part.

Note: New building includes an altered portion of, or an extension to, an existing building.
Standard Condition: F1 (Autotext FF1)

F.2 Commissioning and Certification of Systems and Works

The Principal Contractor or Owner-builder must submit to the satisfaction of the Principal Certifier works-as-executed (WAE) plans, Compliance Certificates and evidence of suitability in accordance with Part A2.2 of the BCA confirming that the works, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant construction certificate, the BCA and relevant Australian Standards.

Works-as-executed plans, Compliance Certificates and evidence of suitability in accordance with Part A2.2 of the BCA must include but may not be limited to:

- a) Certification from the supervising professional engineer that the requirement of the Geotechnical/Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b) All flood protection measures.
- c) All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1: *Off-Street car parking*.
- d) All stormwater drainage and storage systems.
- e) All mechanical ventilation systems.
- f) All hydraulic systems.
- g) All structural work.
- h) All acoustic attenuation work.
- i) All waterproofing.
- j) Such further matters as the Principal Certifier may require.

Note: This condition has been imposed to ensure that systems and works as completed meet development standards as defined by the *Act*, comply with the BCA, comply with this consent and so that a public record of works as execute is maintained.

Note: The PC may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, development standards, BCA, and relevant Australia Standards. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

Note: The PC must submit to Council, with any Occupation Certificate, copies of WAE plans, Compliance Certificates and evidence of suitability in accordance with Part A2.2 of the BCA upon which the PC has relied in issuing any Occupation Certificate.
Standard Condition: F7 (Autotext FF7)

F.3 Commissioning and Certification of Public Infrastructure Works

The Principal Contractor or Owner-builder must submit, to the satisfaction of Council, certification from a professional engineer that all public infrastructure works have been executed in compliance with this consent and with Council's *Specification for Roadworks, Drainage and Miscellaneous Works (2012)*.

The certification must be supported by closed circuit television / video inspection provided on DVD of all stormwater drainage together with works-as-executed engineering plans and a survey report detailing all finished reduced levels.

Standard Condition F9 (Autotext FF9)

F.4 Street Numbering

The development must be provided with street and sole occupancy unit numbers determined by Council. This condition has been imposed to ensure that emergency services, utility services, and the general public are able to clearly and readily locate any property. Further, this condition has been imposed to protect the integrity of street numbering and land information.

Note: Applications for the allocation of street and sole occupancy unit numbers should be made together with any application for a strata certificate or Torrens or community title subdivision certificate. Council will determine at its discretion in accordance with its policy street numbers and street addresses that best suit the public interest.

Standard Condition: F11 (Autotext FF11)

F.5 Letter Box(es)

All letter boxes must be constructed and located in accordance with AS/NZS 4253:1994 *Mailboxes* and to Australia Post's satisfaction.

Note: This condition has been imposed to ensure that mail can be delivered to occupiers of the site.

Standard Condition: F12 (Autotext FF12)

F.6 Swimming and Spa Pools – Permanent Child Resistant Barriers and other Matters

Prior to filling any swimming pool, as defined by the *Swimming Pools Act 1992*:

- a) Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* and the Building Code of Australia.
- b) The swimming pool must be registered in accordance with section 30B of the *Swimming Pools Act 1992* on the NSW Government Swimming Pool Register.
- c) The Principal Contractor or Owner must either obtain a certificate of compliance issued pursuant to section 22D of the *Swimming Pools Act 1992* or an appropriate Occupation Certificate authorising use of the swimming pool.
- d) Public pools must comply with the *NSW Health Public Swimming Pool and Spa Pool Guidelines* in force at that time and private pools are encouraged to comply with the same standards as applicable.
- e) Water recirculation and filtration systems must be installed in compliance with AS 1926.3-2010: *Swimming pool safety - Water recirculation systems*.

Backwash must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Water recirculation and filtration systems must be connected to the electricity supply by a timer that limits the systems operation such that it does not operate before 8 am or after 8 pm on any Sunday or public holiday or before 7 am or after 8 pm on any other day.

Note: NSW Health guidelines and fact sheets are available at
www.health.nsw.gov.au/environment/publicpools/Pages/default.aspx
Standard Condition: F13 (Autotext FF13)

F.7 Swimming Pool Fencing

Swimming pool fencing is to be constructed in accordance with AS1926-2012 Australian Standard Swimming Pool Safety Part 1 – *Safety Barriers for Swimming Pools*.

Note: Pools commenced or completed after May 2013 must meet Part 3.9.6 of the BCA AS1926.1-2012 and AS1926.2-2012
Standard Condition: F20 (Autotext FF20)

F.8 Certification of Electric Vehicle Charging System

Prior to the issue of any Occupation Certificate or occupation or use of part of the building, the Principal Contractor or Owner-builder must submit to the satisfaction of the Principal Certifier, certification by a suitably qualified person that the electric vehicle charger points and/or electric vehicle circuitry, has been installed in accordance with the construction certificate plans and specifications as required by **Condition C.17**.

Standard Condition: F22 (Autotext FF22)

F.9 Vehicle Access and Manoeuvring – Construction & Certification

Prior to the issue of any Occupation Certificate, the applicant must submit, for approval by the Principal Certifying Authority, certification from a Chartered Traffic Engineer relating to the construction of vehicular access and manoeuvring for the development. This certification must be based on a site inspection of the constructed vehicle access, manoeuvring and vehicle accommodation areas, with dimensions and measurements as necessary, and must make specific reference to the following:

- a) That the as-constructed carpark complies with the approved Construction Certificate drawings,
- b) That a maximum gradient of 5% has been provided for the first 6 metres from the property boundary to the basement,
- c) That finished driveway gradients and transitions will not result in scraping to the underside of B99 vehicles,
- d) All parking spaces are open type with no partitions,
- e) That the as-constructed vehicular path and parking arrangements comply in full with AS2890.1 in terms of minimum dimensions provided,
- f) That the headroom clearance of minimum 2.2 metres has been provided between the basement floor and any overhead obstruction to comply with Clause 5.3.1 of AS2890.1,
- g) That Aisle widths throughout basements comply with AS2890.1,

F.10 Positive Covenant for Mechanical Parking Installation & Work-As-Executed Certification of Mechanical Systems

Before the issue of any occupation certificate for the whole of the building, mechanical parking installations are to be certified by a professional engineer with works-as-executed drawings supplied to the Principal Certifier detailing:

- a) Compliance with conditions of development consent relating to mechanical parking installation including traffic light system;
- b) That the works have been constructed in accordance with the approved design;

- c) A positive covenant pursuant to Section 88E of the Conveyancing Act 1919 must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the turntable and traffic signal system incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land and Property Information NSW.

Note: The PCA must supply a copy of the WAE Plans to Council together with the occupation certificate for the whole of the building.

Note: The occupation certificate for the whole of the building must not be issued until this condition has been satisfied.

F.11 Amenity Landscaping

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site.

Note: This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.

G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate

G.1 Electricity Substations – Dedication as Road and/or Easements for Access

If an electricity pillar and/or substation is required on the site the owner must dedicate to the appropriate energy authority (to its satisfaction), free of cost, an area of land adjoining the street alignment to enable an electricity pillar and/or substation to be established. The size and location of the electricity pillar and/or substation is to be in accordance with the requirements of the appropriate energy authority and Council. The opening of any access doors must not intrude onto the public road (footway or road pavement).

Documentary evidence of compliance, including correspondence from the energy authority is to be provided to the Principal Certifier prior to issue of the Construction Certificate detailing energy authority requirements.

The Accredited Certifier must be satisfied that the requirements of energy authority have been met prior to issue of the Construction Certificate.

Where an electricity pillar and/or substation is provided on the site adjoining the road boundary, the area within which the electricity pillar and/or substation is located must be dedicated as public road. Where access is required across the site to access an electricity pillar and/or substation an easement for access across the site from the public place must be created upon the linen plans burdening the subject site and benefiting the Crown in right of New South Wales and any statutory corporation requiring access to the electricity pillar and/or substation.

Standard Condition: G4 (Autotext GG4)

H. Conditions which must be satisfied prior to the issue of the Occupation Certificate for the whole of the building

H.1 Fulfillment of BASIX Commitments – clause 154B of the *Regulation*

All BASIX commitments must be effected in accordance with the BASIX Certificate No. 1367774M.

Note: Clause 154B(2) of the *Environmental Planning and Assessment Regulation 2000* provides: "A certifying authority must not issue a final Occupation Certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled." Standard Condition: H7 (Autotext HH7)

H.2 Removal of Ancillary Works and Structures

The Principal Contractor or Owner must remove from the land and any adjoining public place:

- a) the site sign,
- b) ablutions,
- c) hoarding,
- d) scaffolding, and
- e) waste materials, matter, article or thing.

Note: This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the Final Occupation Certificate.

Standard Condition: H12 (Autotext HH12)

H.3 Road Works (including footpaths)

The following works must be completed to the satisfaction of Council, in compliance with Council's *Specification for Roadworks, Drainage and Miscellaneous Works (2012)* unless expressly provided otherwise by these conditions at the Principal Contractor's or Owner's expense:

- a) stormwater pipes, pits and connections to public stormwater systems within the *road*,
- b) driveways and vehicular crossings within the *road*,
- c) removal of redundant driveways and vehicular crossings,
- d) new footpaths within the *road*,
- e) relocation of existing power/light pole,
- f) relocation/provision of street signs,
- g) new or replacement street trees,
- h) new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street,
- i) new or reinstated kerb and guttering within the *road*, and
- j) new or reinstated road surface pavement within the *road*.

Note: Security held by Council pursuant to section 4.17(6) of the *Act* will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the Final Occupation Certificate to Council. This form can be downloaded from Council's website www.woollahra.nsw.gov.au or obtained from Council's customer service centre.

Standard Condition: H13 (Autotext HH13)

H.4 Positive Covenant and Works-As-Executed Certification of Stormwater Systems

Prior to issue of any Occupation Certificate, stormwater drainage works are to be certified by a professional engineer with works-as-executed drawings prepared by a registered surveyor and submitted, for approval by the Principal Certifying Authority, certifying:

- a) compliance with conditions of development consent relating to stormwater,
- b) the structural adequacy of the on-site stormwater detention (OSD) and rainwater retention and pumpout systems,
- c) that an OSD system with the required storage has been constructed in accordance with the approved stormwater plans,
- d) that a pumpout system with required storage has been constructed in accordance with the approved stormwater plans,
- e) that a rainwater tank with required storage has been constructed in accordance with the approved stormwater plans,
- f) that stormwater from rainwater tank have been connected for non-potable use such as car washing and garden irrigation etc,

- g) that only one stormwater outlet pipe has been constructed in accordance with the approved stormwater plans,
- h) that a stormwater treatment system has been constructed in accordance with the approved plans and meets the water quality targets stipulated in the Council's DCP,
- i) that subsoil drainage/seepage water is NOT collected and discharged into the kerb and gutter in accordance with the approved stormwater drawings,
- j) pipe invert levels and surface levels to Australian Height Datum, and
- k) contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits.

A positive covenant pursuant to section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the stormwater treatment system, on-site detention system, on-site retention system, including any pumps and sumps incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered with the NSW Land Registry Services.

Note: The required wording of the Instrument can be downloaded from Council's website www.woollahra.nsw.gov.au. The PC must supply a copy of the WAE plans to Council together with the Occupation Certificate.

Note: Occupation Certificate must not be issued until this condition has been satisfied.
Standard Condition: H20 (Autotext HH20)

H.5 Positive Covenant for Mechanical Parking Installation & Work-As-Executed Certification of Mechanical Systems

Prior to issue of any Occupation Certificate for the whole of the building, mechanical parking installations are to be certified by a professional engineer with works-as-executed drawings supplied to the Principal Certifier detailing:

- a) Compliance with conditions of development consent relating to mechanical parking installation including traffic light system;
- b) That the works have been constructed in accordance with the approved design;
- c) A positive covenant pursuant to Section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the turntable and traffic signal system incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land and Property Information NSW.

Note: The PCA must supply a copy of the WAE Plans to Council together with the occupation certificate for the whole of the building.

Note: The occupation certificate for the whole of the building must not be issued until this condition has been satisfied.

Condition Reason: To ensure the certification and ongoing maintenance of the mechanical parking installations and to indemnify Council from any claims or actions.

H.6 Landscaping

The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works comply with this consent.

Note: This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the Final Occupation Certificate.

I. Conditions which must be satisfied during the ongoing use of the development

I.1 Maintenance of BASIX Commitments

All BASIX commitments must be maintained in accordance with the BASIX Certificate No. 1367774M.

Note: This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.
Standard Condition: I24

I.2 Ongoing Maintenance of the On-site Stormwater Detention (OSD), Stormwater Treatment and Rainwater Systems

The owner(s) must in accordance with this condition and any positive covenant:

- a) Permit stormwater to be temporarily detained, treated and retained and reused by the systems.
- b) keep the systems clean and free of silt rubbish and debris;
- c) maintain renew and repair as reasonably required from time to time the whole or part of the system so that it functions in a safe and efficient manner;
- d) carry out the matters referred to in paragraphs (b) and (c) at the Owners expense;
- e) not make any alterations to the system or elements thereof without prior consent in writing of the Council and not interfere with the system or by its act or omission cause it to be interfered with so that it does not function or operate properly;
- f) permit the Council or its authorised agents from time to time upon giving reasonable notice (but at any time and without notice in the case of an emergency) to enter and inspect the land with regard to compliance with the requirements of this covenant;
- g) comply with the terms of any written notice issued by Council in respect to the requirements of this clause within the time stated in the notice; and
- h) where the Owner fails to comply with the Owner's obligations under this covenant, permit the Council or its agents at all times and on reasonable notice at the Owner's cost to enter the land with equipment, machinery or otherwise to carry out the works required by those obligations.

The Owner

- a) indemnifies the Council from and against all claims, demands, suits, proceedings or actions in respect of any injury, damage, loss, cost, or liability (**Claims**) that may be sustained, suffered, or made against the Council arising in connection with the performance of the Owner's obligations under this covenant except if, and to the extent that, the Claim arises because of the Council's negligence or default; and
- b) releases the Council from any Claim it may have against the Council arising in connection with the performance of the Owner's obligations under this covenant except if, and to the extent that, the Claim arises because of the Council's negligence or default.

Note: This condition has been imposed to ensure that owners are aware of require maintenance requirements for their stormwater systems.

Note: This condition is supplementary to the owner(s) obligations and Council's rights under any positive covenant.
Standard Condition: I29

I.3 Swimming and Spa Pools – Maintenance

Swimming and spa pools must be maintained:

- a) in compliance with the *Swimming Pools Act 1992* and the Building Code of Australia with regard to the provision of child-resistant barriers and resuscitation signs,

- b) in compliance with the NSW Health “Public Swimming Pools and Spa Pools Advisory Document” in force at that time. Private pools are encouraged to comply with the same standards as applicable,
- c) in compliance with AS 1926.3-2010 *Swimming pool safety - Water recirculation and filtration systems*,
- d) with backwash being discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996, and
- e) with a timer that limits the recirculation and filtration systems operation such that it does not emit noise that can be heard within a habitable room in any other residential premises (regardless of whether any door or window to that room is open):
 - before 8 am or after 8 pm on any Sunday or public holiday, or
 - before 7 am or after 8 pm on any other day.

Note: Child-resistant barriers, resuscitation signs, recirculation and filtration systems and controls systems require regular maintenance to ensure that life safety, health and amenity standards are maintained.

Note: The NSW Health public swimming pools and spa pools guidelines are available at www.health.nsw.gov.au/environment/publicpools/Pages/default.aspx
Standard Condition: I30

I.4 Outdoor Lighting – Residential

Outdoor lighting must comply with AS/NZS 4282:2019: *Control of the obtrusive effects of outdoor lighting*. The maximum luminous intensity from each luminaire and threshold limits must not exceed the level 1 control relevant under tables in AS/NZS 4282:2019.

Note: This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.

Note: This condition has been imposed to control the obtrusive effects of outdoor lighting.
Standard Condition: I49

I.5 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

Note: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (www.epa.nsw.gov.au/your-environment/noise/regulating-noise/noise-guide-local-government) and the *NSW Industrial Noise Policy* (www.epa.nsw.gov.au/your-environment/noise/industrial-noise) published by the NSW Environment Protection Authority. Other State Government authorities also regulate the *Protection of the Environment Operations Act 1997*.

Useful links:

Community Justice Centres—free mediation service provided by the NSW Government
www.cjc.nsw.gov.au.

NSW Environment Protection Authority— see “noise” section
www.environment.nsw.gov.au/noise.

NSW Government legislation- access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* is available at www.legislation.nsw.gov.au.

Australian Acoustical Society—professional society of noise related professionals
www.acoustics.asn.au.

Association of Australian Acoustical Consultants—professional society of noise related professionals
www.aaac.org.au.

Liquor and Gaming NSW—www.liquorandgaming.nsw.gov.au.

Standard Condition: I56

I.6 Noise from Mechanical Plant and Equipment

The noise level measured at any boundary of the site at any time while the mechanical plant and equipment is operating must not exceed the *background noise level*. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed *background noise level* at any time.

The *background noise level* is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the $L_{A90, 15 \text{ minute}}$ level measured by a sound level meter.

Note: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Words in this condition have the same meaning as in the *Noise Policy for Industry* (2017)

[www.epa.nsw.gov.au/your-environment/noise/industrial-noise/noise-policy-for-industry-\(2017\)](http://www.epa.nsw.gov.au/your-environment/noise/industrial-noise/noise-policy-for-industry-(2017))

and *Noise Guide for Local Government* (2013) www.epa.nsw.gov.au/your-environment/noise/regulating-noise/noise-guide-local-government

Standard Condition: I59

I.7 Provision of Off-street Public and Visitor Parking

During the occupation and ongoing use, in compliance with AS 2890.1: Parking facilities - Off-street car parking, unimpeded public access to off-street parking must be maintained as follows:

Use	Number of spaces
Car Parking (residents)	8
Bicycle Parking	4

Note: Where there is a potential for the trespass of private motor vehicles upon private parking servicing the owner of the site may seek to enter into a free parking area agreement with Council. Council may under such agreement enforce parking restrictions under section 650 of the Local Government Act 1993.

Note: Further information can be obtained from Council's Compliance Team by calling 9391 7000 or from the Office of Local Government at www.olg.nsw.gov.au or call 4428 4100.

Condition Reason: To ensure adequate on-site parking is maintained.

I.8 Parking Permits

During the occupation and ongoing use of the development, future tenants and residents of the proposed development will not be eligible for resident or visitor parking permits.

Condition Reason: To minimise the impact of the development upon on street car parking.

I.9 On-going Maintenance of the Mechanical Parking Installations

During the occupation and ongoing use, the Owner must ensure the ongoing maintenance of the mechanical parking installations in accordance with this condition and any positive covenant. The Owner must:

- a) keep the system clean and free of silt rubbish and debris;
- b) maintain renew and repair as reasonably required from time to time the whole of the system so that it functions in a safe and efficient manner;
- c) carry out the matters referred to in paragraphs (a) and (b) at the Owners expense;
- d) not make any alterations to the system or elements thereof without prior consent in writing of the Council and not interfere with the system or by its act or omission cause it to be interfered with so that it does not function or operate properly;

- e) permit the Council or its authorised agents from time to time upon giving reasonable notice (but at any time and without notice in the case of an emergency) to enter and inspect the land with regard to compliance with the requirements of this covenant;
- f) comply with the terms of any written notice issued by Council in respect to the requirements of this clause within the time stated in the notice; and
- g) where the Owner fails to comply with the Owner's obligations under this covenant, permit the Council or its agents at all times and on reasonable notice at the Owner's cost to enter the land with equipment, machinery or otherwise to carry out the works required by those obligations.

The Owner

- a) indemnifies the Council from and against all claims, demands, suits, proceedings or actions in respect of any injury, damage, loss, cost, or liability (Claims) that may be sustained, suffered, or made against the Council arising in connection with the performance of the Owner's obligations under this covenant; and
- b) releases the Council from any Claim it may have against the Council arising in connection with the performance of the Owner's obligations under this covenant.

Notes: This condition is supplementary to the owner(s) obligations and Council's rights under any positive covenant.

Condition Reason: To ensure the ongoing maintenance of the mechanical parking installations.

J. Miscellaneous Conditions

Nil.

K. Advisings

K.1 Criminal Offences – Breach of Development Consent and Environmental Laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws is also a criminal offence.

Where there is any breach Council may without any further warning:

- a) Issue Penalty Infringement Notices (On-the-spot fines);
- b) Issue notices and orders;
- c) Prosecute any person breaching this consent; and/or
- d) Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum penalties under NSW environmental laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious.

Standard Advising: K1 (Autotext KK1)

K.2 Dial Before You Dig



The Principal Contractor, Owner-builder or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and dial 1100 Before You Dig or visit www.1100.com.au

When you contact Dial Before You Dig you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2 (Autotext KK2)

K.3 NSW Police Service and Road Closures

Council and NSW Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Eastern Suburbs Police Area Command.

Warning: If you partial or full close a road without compliance with Council and NSW Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution.

Note: Traffic Supervisors at the Eastern Suburbs Police Area Command can be contacted on eastsubtraffic@police.nsw.gov.au or ph 9369 9899.

Standard Advising: K4 (Autotext KK4)

K.4 Builder's Licences and Owner-builders Permits

Section 6.6(2)(d) of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a Principal Contractor for residential building work who must be the holder of a contractor licence.

The Owner(s) must appoint the Principal Certifier. The Principal Certifier must check that the required insurances are in place before the commencement of building work. The Principal Contractor (builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the *Home Building Act 1989* for the residential building work.

Note: For more information go to the NSW Fair Trading website

www.fairtrading.nsw.gov.au/housing-and-property/building-and-renovating

Standard Condition: K5 (Autotext KK5)

K.5 Building Standards - Guide to Standards and Tolerances

The Principal Certifier does not undertake detailed quality control inspections and the role of the Principal Certifier is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia.

Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "NSW Guide to Standards and Tolerances 2017" are achieved.

The quality of any development is a function of the quality of the Principal Contractor's or Owner-builder's supervision of individual contractors and trades on a daily basis during the development. The Principal Certifier does not undertake this role.

Council, as the Principal Certifier or otherwise, does not adjudicate building contract disputes between the Principal Contractor, contractors and the Owner.

Note: For more information on the *NSW Guide to Standards and Tolerances* go to the NSW Fair Trading website www.fairtrading.nsw.gov.au/housing-and-property/building-and-renovating/after-you-build-or-renovate/guide-to-standards-and-tolerances or call 133 220. Standard Condition: K6 (Autotext KK6)

K.6 SafeWork NSW Requirements

The *Work Health and Safety Act 2011* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: For more information go to the SafeWork NSW website www.safework.nsw.gov.au or call 131 050. Standard Condition: K7 (Autotext KK7)

K.7 Dividing Fences

The erection of dividing fences under this consent does not affect the provisions of the *Dividing Fences Act 1991*. Council does not adjudicate civil disputes relating to the provision of, or payment for, the erection of dividing fences.

Note: Further information can be obtained from the NSW Civil and Administrative Tribunal www.ncat.nsw.gov.au/Pages/cc/Divisions/dividing_fences.aspx

Note: Community Justice Centres provide a free mediation service to the community to help people resolve a wide range of disputes, including dividing fences matters. Their service is free, confidential, voluntary, timely and easy to use. Mediation sessions are conducted by two impartial, trained mediators who help people work together to reach an agreement. Around 75% of mediations result in an agreement being reached. Mediation sessions can be arranged at convenient times during the day, evening or weekends. To contact the Community Justice Centres go to www.cjc.nsw.gov.au or call 1800 990 777. Standard Advising: K10 (Autotext KK10)

K.8 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact Mr Mario D'Alessio, Senior Assessment Officer, on (02) 9391 7120.

However, if you wish to pursue your rights of appeal in the Land and Environment Court you are advised that Council generally seeks resolution of such appeals through a section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14 (Autotext KK14)

K.9 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 4.17 of the *Act*.

The securities will not be released until a Final Occupation Certificate has been lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Refund of Security Bond Application form can be downloaded from www.woollahra.nsw.gov.au
Standard Condition: K15 (Autotext KK15)

K.10 Recycling of Demolition and Building Material

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17 (Autotext KK17)

K.11 Owner-builders

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from NSW Fair Trading.

Note: For more information go to the NSW Fair Trading website www.fairtrading.nsw.gov.au or call 133 220.
Standard Condition: K18 (Autotext KK18)

K.12 Pruning or Removing a Tree Growing on Private Property

The provisions of State Environmental Planning Policy (Vegetation in Non-Rural Areas) 2017 and the Woollahra Development Control Plan 2015 (DCP), Chapter E3 –Tree Management, may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the Woollahra DCP from Council's website www.woollahra.nsw.gov.au or call Council on 9391 7000 for further advice.
Standard Condition: K19 (Autotext KK19)

K.13 Dilapidation Report

Please note the following in relation to the condition for a dilapidation report:

- a) The dilapidation report will be made available to affected property owners on request and may be used by them in the event of a dispute relating to damage allegedly due to the carrying out of the development.

- b) This condition cannot prevent neighbouring buildings being damaged by the carrying out of the development.
- c) Council will not be held responsible for any damage which may be caused to adjoining buildings as a consequence of the development being carried out.
- d) Council will not become directly involved in disputes between the developer, its contractors and the owners of neighbouring buildings.
- e) In the event that access for undertaking the dilapidation survey is denied the Applicant is to demonstrate in writing to the satisfaction of the Principal Certifier that all reasonable steps were taken to obtain access to the adjoining property. The dilapidation report will need to be based on a survey of what can be observed externally. Standard Advising: K23 (Autotext KK23)

K.14 Roads Act 1993 Application

Works or structures over, on or under public roads or footpaths are subject to sections 138, 139 and 218 of the *Roads Act 1993* and specifically:

- Construction of driveways and/or new or alterations to footpath paving
- Alteration and/or extension to Council drainage infrastructure
- Alteration and/or addition of retaining walls
- Pumping of water to Council's below ground stormwater system
- Installation of soil/rock anchors under the roadway
- Installation of Stormwater outlet pipes across the nature strip

An "Application to Carry Out Works in a Public Road" form must be completed and lodged, with the application fee, at Council's Customer Services. Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage etc) within existing roads, must be attached, submitted to and approved by Council under section 138 of the *Roads Act 1993*, before the issue of any Construction Certificate.

Detailed engineering plans and specifications of the works required by this condition must accompany the application form. The plans must clearly show the following:

- Engineering drawings (plan, sections and elevation views) and specifications of the footpath, driveways, kerb and gutter, new gully pit showing clearly the connection point of site outlet pipe(s). Note, the connection drainage lines must be as direct as possible and generally run perpendicular to the kerb alignment.
- Engineering drawings of the new drainage line to be constructed joining the new and existing drainage pits including services.

All driveways must include a design longitudinal surface profile for the proposed driveway for assessment. The driveway profile is to start from the road centreline and be along the worst case edge of the proposed driveway. Gradients and transitions must be in accordance with clause 2.5.3, 2.6 of AS 2890.1 – 2004, Part 1 – *Off-street car parking*. The driveway profile submitted to Council must be to (1:25) scale (for template checking purposes) and contain all relevant details: reduced levels, proposed grades and distances.

The existing footpath level and grade at the street alignment of the property must be maintained unless otherwise specified by Council. Your driveway levels are to comply with AS2890.1 and Council's Standard Drawings. There may be occasions where these requirements conflict with your development and you are required to carefully check the driveway/garage slab and footpath levels for any variations.

Note: Any adjustments required from the garage slab and the street levels are to be carried out internally on private property

Drainage design works must comply with the Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management.

Temporary ground anchors may be permitted, in accordance with Council's "Rock Anchor Policy".

Services: Prior to any excavation works, the location and depth of all public utility services (telephone, cable TV, electricity, gas, water, sewer, drainage, etc.) must be ascertained. The Applicant shall be responsible for all public utility adjustment/relocation works, necessitated by the development work and as required by the various public utility authorities and/or their agents.

All public domain works must comply with the latest version of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" unless expressly provided otherwise by these conditions. This specification and the application form can be downloaded from www.woollahra.nsw.gov.au.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: When an application under the *Roads Act* is required, then four (4) weeks is to be allowed for assessment.

Note: *road* has the same meaning as in the *Roads Act 1993*.

Note: The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any Construction Certificate. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the Applicant to seek to amend this consent.
Standard Advising: K24 (Autotext KK24)

K.15 Mailboxes

Council has been alerted to an increase in mailbox theft, and as such, all new development, being new dwelling houses and residential flat buildings, are encouraged to have lockable mail boxes. Standard Advising: K25 (Autotext KK25)

Note: In accordance with the Woollahra Local Planning Panel Operational Procedures the votes are recorded on this planning matter.

For the Motion

Against the Motion

Judith Clark
Penelope Holloway
Sandra Robinson
Ronald Schaffer

4/0

ITEM No. D2
FILE No. DA278/2023/1
ADDRESS 79 Bellevue Road, Bellevue Hill
PROPOSAL Demolition of existing building and construction of new dual occupancy development with associated landscaping and strata sub-division

Note: Late correspondence was tabled by Chris Hartas, Assessment Officer.

Reasons for Decision

The Panel has undertaken a site inspection, considered any submissions and late correspondence including Council's Assessment Officer's memorandum dated 19 June 2024, and reviewed the assessment report prepared by Council officers that addresses the relevant matters detailed in Section 4.15 of the Environmental Planning and Assessment Act 1979.

The Panel agreed with the revised recommendation (the reasons for refusal) based on technical advice from Council's Trees and Landscaping Officer. Any reference to the deep soil landscaping and tree canopy provisions of Woollahra Local Environmental Plan 2014 and the Woollahra Development Control Plan 2015 has been excluded.

The Panel is satisfied that the application be refused for the reasons set out below.

Resolved: Pursuant to Section 4.16 of the Environmental Planning and Assessment Act 1979

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, is not satisfied that the written request from the applicant has adequately addressed the relevant matters to be addressed under Clause 4.6 of the Woollahra Local Environmental Plan 2014 and therefore consent cannot be granted to the development which contravenes the FSR development standard under Clause 4.4E of the Woollahra Local Environmental Plan 2014.

AND

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, refuse development consent to Development Application No. 278/2023/1 for demolition of existing building and construction of new dual occupancy development with associated landscaping and strata sub-division on land at 79 Bellevue Road BELLEVUE HILL, for the following reasons:

1. Woollahra Local Environmental Plan 2014 (WLEP 2014) Part 1 Clause 1.2: Aims of Plan

The proposal is inconsistent with the aims in Part 1.2(2) because:

- It does not to ensure development achieves the desired future character of the area, as required in sub-clause (l),

2. Woollahra Local Environmental Plan 2014 (WLEP 2014) Land Use Table

The proposal is inconsistent with the relevant objectives of the R2 Low Density Residential zone because:

- The proposal is not compatible with the character and amenity of the surrounding neighbourhood.
- The proposal does not achieve the desired future character of the neighbourhood.

**3. Woollahra Local Environmental Plan 2014 (WLEP 2014) Part 4 – Clause 4.4E
Exceptions to floor space ratio—dwelling houses, dual occupancies and semi-
detached dwellings in Zones R2 and R3**

- The proposal is excessive in bulk and fails to comply with the FSR development standard under cl. 4.4E of the Woollahra LEP 2014.
- The Applicant's written request seeking to justify contravention of cl. 4.4E FSR development standard in Woollahra LEP 2014 does not demonstrate:
 - a) that compliance with the development standard is unreasonable or unnecessary [cl. 4.6(3)(a)]; and
 - b) that there are sufficient environmental planning grounds to justify contravening the development standard [cl. 4.6(3)(b)].

Therefore, cl. 4.6(4)(a)(i) of Woollahra LEP 2014 is not satisfied.

- The proposed development is inconsistent with objective of the FSR development standard as prescribed in Clause 4.4E(1) and with the objectives of the R2 Low Density Residential Zone as prescribed in the R2 Low Density Residential Land Use Table, in sub-clause 2.3(2) of the Woollahra LEP 2014.

Therefore cl. 4.6(4)(a)(ii) of Woollahra LEP 2014 is not satisfied.

- The development is of a bulk and scale that does not achieve the desired future character of the area.

4. Woollahra Development Control Plan 2015 (WDCP 2015), Chapter B1 Residential Precincts

The proposal does not achieve consistency with the Desired Future Character objectives O1, O4, O5 and O6, prescribed in Woollahra DCP 2015 under Part 1.8.2 *Bellevue Hill North Precinct*.

5. WDCP 2015, Chapter B3 General Development Controls

a. Part B3.2: Building Envelope

- The proposal does not comply with Controls C1 and C4 and does not achieve the underlying Objectives O1 and O2 outlined in Part B3.2.3 of the WDCP 2015.
- The proposal does not comply with Controls C1 and does not achieve the underlying Objectives O1 and O5 outlined in Part B3.2.4 of the Woollahra DCP 2015.

b. Part B3.5.1: Streetscape and Local Character

- The proposal does not comply with Control C1 and does not achieve the underlying Objectives O1 and O2 outlined in Part B3.5.1 of the Woollahra DCP 2015.

c. Part B3.7.2 Fences

- The proposal does not comply with Controls C4 and C9 and does not achieve the underlying Objectives O1 and O2 outlined in Part B3.7.2 of the Woollahra DCP 2015.

6. WDCP 2015, Chapter E5 Waste Management

- The proposal does not achieve the underlying Objectives O1 and O2 outlined in Chapter E5 of the Woollahra DCP 2015.

Note: In accordance with the Woollahra Local Planning Panel Operational Procedures the votes are recorded on this planning matter.

For the Motion

Against the Motion

Judith Clark
 Penelope Holloway
 Sandra Robinson
 Ronald Schaffer

4/0

ITEM No. D3
FILE No. DA41/2024/1
ADDRESS 361-441 Glenmore Road, Paddington
PROPOSAL Upgrade the grandstand amenities, sport facilities & change rooms

Reasons for Decision

The Panel has reviewed the assessment report prepared by Council officers that addresses the relevant matters detailed in Section 4.15 of the Environmental Planning and Assessment Act 1979.

For the reasons generally in the assessment report, the Panel is satisfied that the application can be approved subject to the conditions in the assessment report with the deletion of Condition D.3 because Section 2.3.2 of the Woollahra Development Contributions Plan 2022 exempts development applications made by Council from the payment of development contributions.

Resolved: Pursuant to Section 4.16 of the Environmental Planning and Assessment Act 1979

THAT the Woollahra Local Planning Panel, exercising the functions of Council, grant development consent to Development Application No. 41/2024/1 for upgrade the grandstand amenities, sport facilities & change rooms on land at 361-441 Glenmore Road Paddington, subject to the following conditions:

ALL DEVELOPMENT TYPES

A. GENERAL CONDITIONS

A. 1.	<p>Conditions</p> <p>Consent is granted subject to the following conditions imposed under section 4.16 of the Environmental Planning and Assessment Act 1979 (“the Act”), and the provisions of the Environmental Planning and Assessment Regulation 2021 (“the Regulations”) and the provisions of the Environmental Planning and Assessment (Development Certification and Fire Safety) Regulation 2021 (“the Development Certification and Fire Safety Regulations”), such conditions being reasonable and relevant to the development as assessed under section 4.15 of the Act.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Failure to comply with this development consent and any condition of this consent is a criminal offence. Failure to comply with other environmental laws is also a criminal offence.
--------------	---

	<ul style="list-style-type: none"> • Where there is any breach Council may without any further warning: <ol style="list-style-type: none"> a) Issue Penalty Infringement Notices (On-the-spot fines); b) Issue notices and orders; c) Prosecute any person breaching this consent; and/or d) Seek injunctions/orders before the courts to restrain and remedy any breach. • Maximum penalties under NSW environmental laws include fines up to \$1.1 Million and/or custodial sentences for serious offences. • Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order. • This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action. • The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of the Crimes (Sentencing Procedure) Act 1999, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious.
	<p>Condition Reason: To ensure all parties are aware of the relevant legislation that applies to the development.</p>
<p>A. 2.</p>	<p>Definitions</p> <p>Unless specified otherwise, words have the same meaning as defined by the <i>Act</i>, the <i>Regulations</i>, the <i>Development Certification and Fire Safety Regulations</i> and the <i>Interpretation Act 1987</i> as in force at the date of consent.</p> <p>Applicant means the applicant for this consent.</p> <p>Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.</p> <p>Local native plants means species of native plant endemic to Sydney's eastern suburbs.</p> <p>Owner-builder has the same meaning as in the <i>Home Building Act 1989</i>.</p> <p>PC means the Principal Certifier under the <i>Act</i>.</p> <p>Principal Contractor has the same meaning as in the <i>Act</i>, or where a Principal Contractor has not been appointed by the Owner of the land being developed Principal Contractor means the Owner of the land being developed.</p> <p>Professional engineer has the same meaning as in the <i>BCA</i>.</p> <p>Public place has the same meaning as in the <i>Local Government Act 1993</i>.</p> <p>Road has the same meaning as in the <i>Roads Act 1993</i>.</p> <p>SEE means the final version of the Statement of Environmental Effects lodged by the Applicant.</p> <p>Site means the land being developed subject to this consent.</p> <p>Site work means any work that is physically carried out on the land to which the development the subject of this development consent is to be carried out, including but not limited to building work, subdivision work, demolition work, clearing of vegetation or remediation work.</p>

Woollahra LEP means *Woollahra Local Environmental Plan 2014*

Woollahra DCP means *Woollahra Development Control Plan 2015*

Work for the purposes of this consent means:

- the use of land in connection with development,
- the subdivision of land,
- the erection of a building,
- the carrying out of any work,
- the use of any site crane, machine, article, material, or thing,
- the storage of waste, materials, site crane, machine, article, material, or thing,
- the demolition of a building,
- the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- the delivery to or removal from the *site* of any machine, article, material, or thing, or
- the occupation of the *site* by any person unless authorised by an occupation certificate.

Condition Reason: To ensure all parties are aware of the relevant definitions.

A. 3. Approved Plans and Supporting Documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with both the architectural plans to which is affixed a Council stamp “Approved” and supporting documents listed below unless modified by any following condition.

Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author	Date
A1.00 Rev D	Demolition Plan	AriiSmits	27/10/2023
A2.00 Rev E	Partition Plan		12/12/2023
A3.00 Rev E	FFE Plan		12/12/2023
A4.00 Rev E	Finishes Plan		12/12/2023
A5.00 Rev E	Reflected Ceiling Plan		12/12/2023
A6.00 Rev C	Change Rooms Elevation & Section		19/10/2023
A6.01 Rev A	Grandstand External Elevation		19/10/2023
A7.00 Rev C	Partition Details		19/10/2023
A7.01 Rev C	Stair Details		17/12/2023
A9.00 Rev E	Changeroom 1 WC		12/12/2023
A9.01 Rev C	Changeroom 2 WC		19/10/2023
A9.02 Rev E	Umpires Room WC		13/12/2023
A9.03 Rev D	Accessible WC		13/12/2023
A9.04 Rev E	Female WC		13/12/2023
A9.05 Rev E	Male WC		14/12/2023

Notes:

- Warning to Principal Certifier – You must always insist on sighting the original Council stamped approved plans. You must not rely solely upon the plan reference numbers in this condition. Should the Applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plans.
- These plans and supporting documentation may be subject to conditions imposed under section 4.17(1)(g) of the Act modifying or amending the development.

	<p>Condition Reason: To ensure all parties are aware of the approved plans and supporting documentation that applies to the development.</p>								
A. 4.	<p>Ancillary Aspects of Development (section 4.17(2) of the Act)</p>								
	<p>The Owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's Specification for Roadworks, Drainage and Miscellaneous Works (2012) unless expressly provided otherwise by these conditions at the Owner's expense.</p> <p>Notes:</p> <ul style="list-style-type: none"> This condition does not affect the Principal Contractor's or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs. 								
	<p>Condition Reason: To ensure all parties are aware of works required to public infrastructure and to ensure payment for works.</p>								
A. 5.	<p>Tree Preservation and Landscaping Works</p>								
	<p>While site work is being carried out, all landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.</p> <p>a) The following trees may be pruned:</p>								
	<table border="1"> <thead> <tr> <th>Council Ref No</th> <th>Species</th> <th>Location</th> <th>Approved pruning (extent of pruning)</th> </tr> </thead> <tbody> <tr> <td>Tree 1</td> <td><i>Jacaranda mimosifolia</i> (Jacaranda)</td> <td>4 Royston St. Rear</td> <td>Pruning of branches under 80mm in diameter to provide up to 2m clearance to the building envelope</td> </tr> </tbody> </table>	Council Ref No	Species	Location	Approved pruning (extent of pruning)	Tree 1	<i>Jacaranda mimosifolia</i> (Jacaranda)	4 Royston St. Rear	Pruning of branches under 80mm in diameter to provide up to 2m clearance to the building envelope
	Council Ref No	Species	Location	Approved pruning (extent of pruning)					
Tree 1	<i>Jacaranda mimosifolia</i> (Jacaranda)	4 Royston St. Rear	Pruning of branches under 80mm in diameter to provide up to 2m clearance to the building envelope						
<p>This consent does not permit the holder, or any other person or agent, to enter any property for the purpose of undertaking approved tree works, without the consent of the owner of the property.</p> <p>All pruning works must be undertaken by a qualified arborist with a minimum AQF Level 3 in Arboriculture in accordance with <i>Australian Standard AS4373-2007 Pruning of Amenity Trees</i> and <i>WorkCover Code of Practice 'Amenity Tree Industry', 1998.</i></p>									
<p>Condition Reason: To ensure all landscape works are undertaken in accordance with the approved plans and documents.</p> <p>Standard Condition A.22 (Autotext 22A)</p>									

DEMOLITION WORK

B. BEFORE DEMOLITION WORK COMMENCES

B. 1.	<p>Construction Certificate Required Prior to Any Demolition</p>
	<p>Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" under section 6.6 of the Act.</p>

	<p>In such circumstance all conditions included at the following development stages of this consent must be satisfied prior to any demolition work:</p> <ul style="list-style-type: none"> • Before issue of a construction certificate • Before building work commences <p>This includes, but is not limited to, the issue of a Construction Certificate, appointment of a Principal Certifier, and Notice of Commencement under the Act.</p> <p>Note:</p> <ul style="list-style-type: none"> • See Over our Dead Body Society Inc v Byron Bay Community Association Inc [2001] NSWLEC 125.
	<p>Condition Reason: To ensure appropriate conditions are complied with for development for the alteration and extension of an existing building.</p>
<p>B. 2.</p>	<p>Erosion and Sediment Controls – Installation</p> <p>Before any site work commences, water pollution, erosion and sedimentation controls must be installed and maintained in accordance with:</p> <ol style="list-style-type: none"> “Do it Right On Site, Soil and Water Management for the Construction Industry” and accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book). <p>Where there is any conflict The Blue Book takes precedence.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au and The Blue Book is available at www.environment.nsw.gov.au • A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution. • Section 257 of the Protection of the Environment Operations Act 1997 provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. • Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of their occupation of the land being developed. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>B. 3.</p>	<p>Identification of Hazardous Material</p> <p>Prior to any site works, and in accordance with Australian Standard AS2601: The Demolition of Structures, all hazardous substances located on the site must be identified, including asbestos, polychlorinated biphenyls (PCBs), lead paint, underground storage tanks, chemicals, etc.</p> <p>In this regard, prior to any site works, Council must be provided with a written report prepared by a suitably qualified competent person detailing:</p> <ul style="list-style-type: none"> • all hazardous materials identified on the site,

	<ul style="list-style-type: none"> the specific location of all hazardous materials identified, whether the hazardous materials are to be removed from the site as part of the works to be undertaken, and safety measures to be put in place. <p>Condition Reason: To protect the health and safety of all persons while works are being undertaken and to ensure all safety measures have been identified and are in place to protect all parties in the immediate vicinity of the site.</p>																								
<p>B. 4.</p>	<p>Public Road Assets Prior to Any Work/Demolition</p> <p>Prior to any site works, a full record of the condition of the public infrastructure on public land adjacent to the development site must be submitted to Council.</p> <p>The report must include photographs and/or CCTV footage showing the current condition and any existing damage fronting and adjoining the site to the:</p> <ul style="list-style-type: none"> road pavement, street signage including street lights, kerb and gutter, footway including pedestrian crossings, footpath, and driveways, retaining walls, or other significant structures, Heritage Items, including street name inlays, utility service items including historical utility covers, and drainage structures/pits/pipes (CCTV footage). <p>The reports are to be supplied in electronic format in Word and if applicable accompanied by CCTV footage. Photographs are to be in colour, digital and date stamped.</p> <p>If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any site works under this consent.</p> <p>Condition Reason: To clarify the condition of the existing public infrastructure prior to the commencement of any site works.</p>																								
<p>B. 5.</p>	<p>Payment of Security and Fees</p> <p>Prior to any site works, the following security and fees must be paid in full:</p> <table border="1" data-bbox="316 1563 1422 2011"> <thead> <tr> <th>Description</th> <th>Amount</th> <th>Indexed</th> <th>Council Fee Code</th> </tr> </thead> <tbody> <tr> <td colspan="4">SECURITY under section 4.17(6) of the <i>Environmental Planning and Assessment Act 1979</i></td> </tr> <tr> <td>Property Damage Security Deposit -making good any damage caused to any property of the Council</td> <td>\$12,995.00</td> <td>No</td> <td>T115</td> </tr> <tr> <td colspan="4">INSPECTION FEES under section 608 of the <i>Local Government Act 1993</i></td> </tr> <tr> <td>Security Deposit Administration Fee</td> <td>\$225.00</td> <td>No</td> <td>T16</td> </tr> <tr> <td>TOTAL SECURITY AND FEES</td> <td>\$13,220.00</td> <td></td> <td></td> </tr> </tbody> </table>	Description	Amount	Indexed	Council Fee Code	SECURITY under section 4.17(6) of the <i>Environmental Planning and Assessment Act 1979</i>				Property Damage Security Deposit -making good any damage caused to any property of the Council	\$12,995.00	No	T115	INSPECTION FEES under section 608 of the <i>Local Government Act 1993</i>				Security Deposit Administration Fee	\$225.00	No	T16	TOTAL SECURITY AND FEES	\$13,220.00		
Description	Amount	Indexed	Council Fee Code																						
SECURITY under section 4.17(6) of the <i>Environmental Planning and Assessment Act 1979</i>																									
Property Damage Security Deposit -making good any damage caused to any property of the Council	\$12,995.00	No	T115																						
INSPECTION FEES under section 608 of the <i>Local Government Act 1993</i>																									
Security Deposit Administration Fee	\$225.00	No	T16																						
TOTAL SECURITY AND FEES	\$13,220.00																								

	<p>How must the payments be made? Payments must be made by:</p> <ul style="list-style-type: none"> • cash deposit with Council, • credit card payment with Council, or • bank cheque made payable to Woollahra Municipal Council. <p>The payment of a security may be made by a bank guarantee where:</p> <ul style="list-style-type: none"> • the guarantee is by an Australian bank for the amount of the total outstanding contribution, • the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable], • the bank agrees to pay the guaranteed sum without reference to the Applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent, • the bank guarantee is lodged with the Council prior to any site works being undertaken, and • the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required. <p>Notes:</p> <ul style="list-style-type: none"> • An application must be made to Council by the person who paid the security for release of the securities held under section 4.17 of the Act. • The securities will not be released until the Occupation Certificate has been lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements. • Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be. • Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed. • Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period. • The Refund of Security Bond Application form can be downloaded from www.woollahra.nsw.gov.au <p>Condition Reason: To ensure any relevant security and fees are paid.</p>
<p>B. 6.</p>	<p>Adjoining Buildings Founded on Loose Foundation Materials</p> <p>Before any site work commences, a professional engineer must determine the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The professional engineer (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis, and any reasonable direction of the professional engineer must be complied with.</p> <p>Notes:</p> <ul style="list-style-type: none"> • A failure to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings.

- The person with the benefit of this consent is likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the Conveyancing Act 1919.

Condition Reason: To ensure professional engineering advice is obtained to confirm that appropriate underpinning and support to adjoining land is maintained.

B. 7. Works (Construction) Zone – Approval and Implementation

If the Construction Management Plan relies upon a Works Zone, before any site work commences, a Works Zone application must be made.

If the works zone is approved, all fees for the Works Zone must be paid before it can be installed.

All Works Zone signs must have been erected by Council to permit enforcement of the Works Zone by Council's Rangers and NSW Police before commencement of any site work. Signs are not erected until full payment of Works Zone fees is made.


Notes:

- A minimum of four to six weeks must be allowed (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under clause 20 of the Transport Administration (General) Regulation 2018 to exercise those functions delegated by Transport for New South Wales under section 31(3) of the Transport Administration Act 1988.
- The enforcement of the Works Zone is at the discretion of Council's Rangers and the NSW Police Service. Any breach of the Works Zone must be reported to either Council or the NSW Police Service.

Condition Reason: To facilitate the efficient operation of construction projects and to minimise traffic disruption.


B. 8. Security Fencing, Hoarding (including 'Creative Hoardings') and Overhead Protection

Before any site work commences, security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

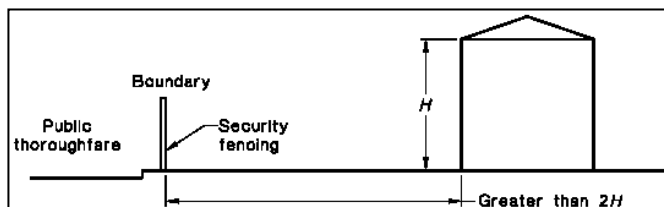

Type A Hoarding

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8m adjacent to the thoroughfare.

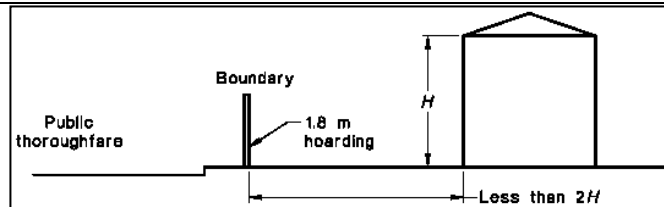


Type B Hoarding

Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an overhead protective structure and the facing facade protected by heavy-duty scaffolding, unless either:

- the vertical height above footpath level of the structure being demolished is less than 4.0m; or
- the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must:

- extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary,
- have a clear height above the footpath of not less than 2.1m,
- terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5m above the platform surface, and
- together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

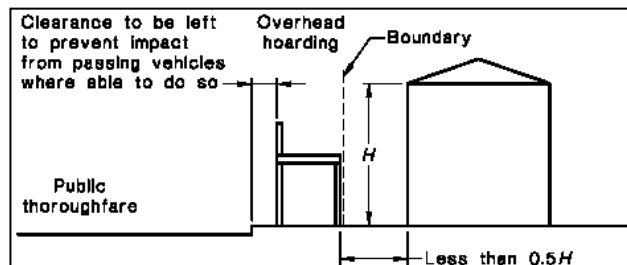

The overhead protective structures must be installed and maintained in accordance with the NSW "Code of Practice - Overhead Protective Structures 1995". This is code available at www.safework.nsw.gov.au/__data/assets/pdf_file/0008/52883/Overhead-protective-structures-Code-of-practice.pdf

All Hoardings

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Hoardings on Public Land including 'Creative Hoardings'

All fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection must be paid in full.

A creative hoarding (i.e. an approved artwork or historic image affixed to the hoarding) is required if the hoarding meets the criteria in Council's Creative Hoardings Policy (adopted March 2020). The cost of printing and affixing the creative hoarding is the responsibility of the person with the benefit of this consent. The Creative Hoardings Policy can be downloaded from Council's website www.woollahra.nsw.gov.au

	<p>Notes:</p> <ul style="list-style-type: none"> • A minimum of two (2) weeks from the date of making a hoarding application to determination must be allowed. Any approval for a hoarding or overhead protection under the Roads Act 1993 will be subject to its own conditions and fees. • Council seeks to increase public art in the public domain by requiring artwork or historic images on hoardings located on public land. Under the Creative Hoardings Policy an application for a hoarding proposed on public land will require an approved artwork or historic image affixed to the hoarding if the hoarding meets the criteria in section 3 of the Policy: <ul style="list-style-type: none"> A. Hoardings proposed on land zoned E1 Local Centre, or MU1 Mixed Use, or SP2 Infrastructure under Woollahra Local Environmental Plan 2014 AND erected for 8 weeks or more OR B. Hoardings proposed on land located along a State classified road (regardless of the zone) AND erected for 8 weeks or more OR C. Hoardings proposed in any other location than that referred to in A. and B. above AND erected for 12 weeks or more, except where: <ul style="list-style-type: none"> 1. the capital investment value of the work to which the hoarding relates is less than \$1 million, or 2. the land is zoned R2 Low Density Residential, or 3. the land is zoned R3 Medium Density Residential and the hoarding is located in a lane or street that does not have through traffic (e.g. a cul-de-sac or no through road). • Artwork and historic images for the hoardings are assessed and approved in accordance with the Creative Hoardings Policy. Details of the artwork or images proposed to be affixed to the hoardings must be submitted with Council's form "Application for a permit to use a footpath for the erection of a hoarding/scaffolding". The Creative Hoardings Policy can be downloaded from www.woollahra.nsw.gov.au <p>Condition Reason: To ensure public safety.</p>
<p>B. 9.</p>	<p>Site Signs</p> <p>Before any site work commences, the sign/s required by clauses 70 of the Regulation and 75 of the Development Certification and Fire Safety Regulation must be erected and maintained at all times.</p> <p>Clause 70 of the Regulation provides:</p> <p>Erection of signs</p> <ul style="list-style-type: none"> • For the purposes of section 4.17(11) of the Act, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work. • A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out: <ul style="list-style-type: none"> a) showing the name, address and telephone number of the principal certifier for the work, and b) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and c) stating that unauthorised entry to the work site is prohibited. • Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed. • This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.

	<ul style="list-style-type: none">• This clause does not apply in relation to Crown building work that is certified, in accordance with section 6.28 of the Act, to comply with the Building Code of Australia. <p>Clause 75 of the Development Certification and Fire Safety Regulation provides:</p> <p>Signs on development sites</p> <p>If there is a person who is the Principal Certifier or the Principal Contractor for any building work, subdivision work or demolition work authorised to be carried out on a site by a development consent or complying development certificate:</p> <ul style="list-style-type: none">• Each such person MUST ensure that a rigid and durable sign showing the person’s identifying particulars so that they can be read easily by anyone in any public road or other public place adjacent to the site is erected in a prominent position on the site before the commencement of work, and is maintained on the site at all times while this clause applies until the work has been carried out. <p>Notes:</p> <ul style="list-style-type: none">• Clause 75 of the Development Certification and Fire Safety Regulations imposes a maximum penalty of 55 penalty units if these requirements are not complied with.• If Council is appointed as the Principal Certifier it will provide the sign to the Principal Contractor or Owner-builder who must ensure that the sign is erected and maintained as required by clause 70 of the Regulation and clause 75 of the Development Certification and Fire Safety Regulation.
	<p>Condition Reason: To ensure that contact details for the principal certifier and principal contractor are provided on a sign at the development site.</p>
<p>B. 10.</p>	<p>Toilet Facilities</p> <p>Before any site work commences, toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.</p> <p>Each toilet provided:</p> <ol style="list-style-type: none">a) must be a standard flushing toilet, andb) must be connected to a public sewer, orc) if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the Council, ord) if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the Council. <p>The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.</p> <p>Notes:</p> <ul style="list-style-type: none">• In this condition ‘sewage management facility’ and ‘public sewer’ are as defined by clause 25 of the Local Government (Approvals) Regulation 1999.• This condition does not set aside the requirement to comply with SafeWork NSW requirements. <p>Condition Reason: To ensure toilet facilities are provided for workers at the work site.</p>

B. 11.	Establishment of Boundary Location, Building Location and Datum
	<p>Before any site work commences, a surveyor registered under the Surveying and Spatial Information Act 2002 must:</p> <ol style="list-style-type: none"> a) set out the boundaries of the site by permanent marks (including permanent recovery points), b) set out the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum (AHD) in compliance with the approved plans, c) establish a permanent datum point (bench mark) within the boundaries of the site relative to AHD, and d) provide a copy of a survey report, prepared by the registered surveyor, detailing the title boundaries, pegs/profiles, recovery points and bench mark locations as established under this condition to the Principal Certifier. <p>Notes:</p> <ul style="list-style-type: none"> • Where there is any discrepancy between the approved development consent and the Construction Certificate, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the site works must not proceed until the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent. • On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks must be considered by the registered surveyor.
	Condition Reason: To ensure that the boundary locations, building location, and a datum point is established by a surveyor.
B. 12.	Compliance with Australian Standard for Demolition
	While site work is being carried out, the demolition of buildings and structures must comply with Australian Standard AS 2601—2001: The Demolition of Structures.
	Condition Reason To control the risks of demolition work.

REMEDIATION WORK

C. ON COMPLETION OF REMEDIATION WORK

Nil.

BUILDING WORK

D. BEFORE ISSUE OF A CONSTRUCTION CERTIFICATE

D. 1.	Modification of Details of the Development (section 4.17(1)(g) of the Act
	<p>Before the issue of any construction certificate, the approved plans and the construction certificate plans and specification, required to be submitted to the Principal Certifier under clause 7 of the Development Certification and Fire Safety Regulations, must detail the following amendments:</p> <ol style="list-style-type: none"> a) The materiality of the new accessible door along the western elevation of the grandstand building is to match other existing doors of the grandstand, so that it is in keeping with the character and design intent of the building.

	<p>This is in order to comply with: <i>Woollahra LEP 2014, Clause 5.10 Heritage Conservation, 1(a), (b); Woollahra DCP 2015, Chapter C1, Clause 1.4.2, Objectives O1, O2, O3, Control C2; Woollahra DCP 2015, Chapter C1, Clause 1.5.3, Objective O3, Control C4; Woollahra DCP 2015, Chapter C1, Clause 1.5.8, Objectives O2, Controls C4, C5.</i></p> <p>b) All make good, repainting and repair works to the existing windows and doors are to be like for like, including materiality, detailing, design and colour.</p> <p>This is in order to comply with: <i>Woollahra LEP 2014, Clause 5.10 Heritage Conservation, 1(a), (b); Woollahra DCP 2015, Chapter C1, Clause 1.5.3, Objectives O1, O3, Control C4; Woollahra DCP 2015, Chapter C1, Clause 1.5.8, Objective O2, Controls C4, C5.</i></p> <p>Notes:</p> <ul style="list-style-type: none"> • Clause 20 of the Development Certification and Fire Safety Regulations prohibits the issue of any construction certificate subject to this condition unless the Principal Certifier is satisfied that the condition has been complied with. • Clause 19 of the Development Certification and Fire Safety Regulations prohibits the issue of any construction certificate that is inconsistent with this consent. <p>Condition Reason: To require design changes and/or further information to be provided to address specific issues identified during the assessment under section 4.15 of the Act.</p>
<p>D. 2.</p>	<p>Erosion and Sediment Control Plan – Submission and Approval</p> <p>Before the issue of any construction certificate, an erosion and sediment control plan, prepared by a suitably qualified person in accordance with the following documents, must be submitted to the Principal Certifier. The erosion and sediment control plan must comply with:</p> <p>a) “Do it Right On Site, Soil and Water Management for the Construction Industry” and the accompanying factsheets published by the Southern Sydney Regional Organisation of Councils; and</p> <p>b) “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book).</p> <p>Where there is any conflict The Blue Book takes precedence.</p> <p>The Principal Certifier must be satisfied that the erosion and sediment control plan complies with the publications above prior to issuing any construction certificate.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The International Erosion Control Association – Australasia www.austieca.com.au lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans. • The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au, and The Blue Book is available at www.environment.nsw.gov.au • Under clause 73(2)(a)(v) of the Development Certification and Fire Safety Regulation an Accredited Certifier may be satisfied as to this matter. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>

D. 3.	Deleted
D. 4.	<p>Structural Adequacy of Existing Supporting Structures</p> <p>Before the issue of any construction certificate, a certificate from a professional structural engineer, certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be provided to the Principal Certifier and submitted with the construction certificate application.</p> <p>Condition Reason: To ensure that the existing structure is able to support the additional loads proposed.</p>
D. 5.	<p>Professional Engineering Details</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications, required under clause 7 of the Development Certification and Fire Safety Regulation, must include detailed professional engineering plans and/or specifications for all structural, electrical, hydraulic, hydrogeological, geotechnical, mechanical and civil work complying with this consent, approved plans, and supporting documentation.</p> <p>Detailed professional engineering plans and/or specifications must be submitted to the Principal Certifier with the application for any construction certificate.</p> <p>Notes:</p> <ul style="list-style-type: none"> • This does not affect the right of the developer to seek staged construction certificates. <p>Condition Reason: To ensure professional engineering details and technical specifications are provided.</p>
D. 6.	<p>Stormwater Discharge to Existing Stormwater Drainage System</p> <p>Before the issue of any construction certificate, the applicant must submit, for approval by the Principal Certifier, detailed stormwater management plans prepared by a chartered professional civil engineer, which include the following:</p> <ol style="list-style-type: none"> The stormwater management plans must specify any components of the existing drainage system to be retained and certified to be in good condition and of adequate capacity to convey additional runoff and be replaced or upgraded if required. Detail the location of the existing stormwater drainage system including all pipes, inspection openings, surface drains, pits and their discharge location as well as any new stormwater drainage system. Detail any remedial works required to upgrade the existing stormwater drainage system. Internal stormwater drainage pipes and pits are to be designed for rainfall intensities up to and including the 1% AEP event if an unimpeded overland flow path to the street drainage system is not available. Design details and calculations must be included in the stormwater management plans. The discharge of stormwater from the site to the street drainage system. The stormwater outlet pipe across the Council's property must have a minimum grade of 1% to comply with Council's DCP and AS3500.3. All below ground structures are to be fully tanked such that subsoil drainage/seepage water is NOT discharged to the kerb and gutter to comply with Chapter E2.2.5 of Council's DCP. Notation to this requirement must be clearly depicted on the drawings.

- g) Dimensions of all drainage pits and access grates must comply with AS3500.3 and the Council's DCP.
- h) Interceptor drain(s) at the site boundary to prevent stormwater flows from the site crossing the footpath; and General compliance with the Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management.
- i) General compliance with the Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management.

The Stormwater Management Plan must also include the following specific requirements:

Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Australian Government publication, Australian Rainfall and Run-off, 2019 edition or most current version thereof. It must include:

- a) All pipe layouts, dimensions, grades, lengths and material specification.
- b) Location and dimensions of all downpipes.
- c) All invert levels reduced to Australian Height Datum (AHD).
- d) Location and dimensions of all drainage pits.
- e) Point and method of connection to Councils drainage infrastructure.
- f) Overland flow paths over impervious areas.

Where new Stormwater Drainage System crosses the footpath area within any road, separate approval under section 138 of the Roads Act 1993 must be obtained from Council for those works before the issue of any construction certificate.

All Stormwater Drainage System work within any road or public place must comply with Woollahra Municipal Council's Specification for Roadworks, Drainage and Miscellaneous Works (2012).

Notes:

- *The collection, storage and use of rainwater is to be in accordance with Standards Australia HB230 "Rainwater Tank Design and Installation Handbook".*

Condition Reason: To ensure that site stormwater is disposed of in a controlled and sustainable manner.

D. 7. Flood Protection

Before the issue of any construction certificate, the construction certificate plans and specifications required under clause 7 of the Development Certification and Fire Safety Regulation, must include a Flood Risk Management Plan on the basis of the Flood Planning Level (FPL).

Flood Warning:

- a) A permanent flood risk management plan shall be installed in an area frequented by the users,

Flood Proof Material

- a) Flood compatible materials shall be used for all flood exposed construction.

Electricals

- a) All flood exposed electrical wiring and equipment shall be waterproofed or able to be quickly isolated,

	<p>Flood protection is to comply with Woollahra DCP 2015, Part E General Controls for All Development, Chapter E2 –Stormwater and Flood Risk Management.</p> <p>Notes:</p> <ul style="list-style-type: none"> The revised driveway profile, gradients and transitions must be in accordance with Australian Standard 2890.1, Part 1: Off-street car parking. The driveway profile submitted to Council must contain all relevant details: reduced levels, proposed grades and distances. Council will not allow alteration to existing reduced levels within the road or any other public place to achieve flood protection.
	<p>Condition Reason: To ensure the development incorporates flood inundation protection measures.</p>

E. BEFORE BUILDING WORK COMMENCES

<p>E. 1.</p>	<p>Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989</p> <p>Before any building work commences, and under section 4.17(11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:</p> <ol style="list-style-type: none"> that the work must be carried out in accordance with the requirements of the Building Code of Australia, in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences. <p>This condition does not apply:</p> <ol style="list-style-type: none"> to the extent to which an exemption is in force under the Home Building Regulation 2014, or to the erection of a temporary building. <p>In this condition, a reference to the BCA is a reference to that code as in force on the date the application for the relevant Construction Certificate is made.</p> <p>Notes:</p> <ul style="list-style-type: none"> This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia. All new guttering is to comply with the provisions of AS3500. <p>Condition Reason: To ensure that works are carried out in accordance with the Building Code of Australia and any required contract of insurance is in force.</p>
<p>E. 2.</p>	<p>Erosion and Sediment Controls – Installation</p> <p>Before any building work commences, water pollution, erosion and sedimentation controls must be installed and maintained in accordance with:</p> <ol style="list-style-type: none"> The Soil and Water Management Plan if required under this consent; “Do it Right On Site, Soil and Water Management for the Construction Industry” and accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book).

	<p>Where there is any conflict The Blue Book takes precedence.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The International Erosion Control Association – Australasia (www.austieca.com.au/) lists consultant experts who can assist in ensuring compliance with this condition. • Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia. • The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and the accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au and The Blue Book is available at www.environment.nsw.gov.au • A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution. • Section 257 of the Protection of the Environment Operations Act 1997 provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. • Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of their occupation of the land being. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>E. 3.</p>	<p>Building - Construction Certificate, Appointment of Principal Certifier, Appointment of Principal Contractor and Notice of Commencement (Part 6, Division 6.3 of the Act)</p> <p>Building work must not commence, until:</p> <ol style="list-style-type: none"> a) A construction certificate for the building work has been issued by the consent authority, the Council (if the Council is not the consent authority) or an accredited Certifier, and b) The person having the benefit of the development consent has: <ul style="list-style-type: none"> • appointed a Principal Certifier for the building work, and • notified the Principal Certifier that the person will carry out the building work as an Owner-builder, if that is the case, and c) The Principal Certifier has, no later than 2 days before the building work commences: <ul style="list-style-type: none"> • notified the consent authority and the Council (if the Council is not the consent authority) of his or her appointment, and • notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and d) The person having the benefit of the development consent, if not carrying out the work as an Owner-builder, has: <ul style="list-style-type: none"> • appointed a Principal Contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and • notified the Principal Certifier of any such appointment, and • unless that person is the Principal Contractor, notified the Principal Contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and • given at least 2 days’ notice to the Council of the person’s intention to commence the erection of the building.

	<p>Notes:</p> <ul style="list-style-type: none"> • Building has the same meaning as in section 1.4 of the Act and includes part of a building and any structure or part of a structure. • New building has the same meaning as in section 6.1 of the Act and includes an altered portion of, or an extension to, an existing building. • The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 6.6(2) of the Act (including the need for a Construction Certificate) prior to any demolition work. See: <i>Over our Dead Body Society Inc v Byron Bay Community Association Inc</i> [2001] NSWLEC 125. • Construction Certificate Application, PC Service Agreement and Notice of Commencement forms can be downloaded from Council’s website www.woollahra.nsw.gov.au • It is an offence for any person to carry out the erection of a building in breach of this condition and in breach of section 6.6(2) of the Act. • Under the Home Building Act 1989 any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from NSW Fair Trading.
	<p>Condition Reason: To ensure a construction certificate has been issued, a Principal Certifier is appointed, a Principal Contractor (if applicable) is appointed, and a notice of commencement has been submitted.</p>

F. DURING BUILDING WORK

<p>F. 1.</p>	<p>Compliance with BCA and Insurance Requirements under the Home Building Act 1989</p>
	<p>While site work is being carried out:</p> <ul style="list-style-type: none"> a) work must be carried out in accordance with the requirements of the Building Code of Australia (BCA), b) in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences. <p>This condition does not apply:</p> <ul style="list-style-type: none"> a) to the extent to which an exemption is in force under the Development Certification and Fire Safety Regulations, or b) to the erection of a temporary building. <p>In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.</p> <p>For the purposes of section 4.17(11) of the Act, the above condition is prescribed in relation to a development consent for development that involves any building work.</p> <p>Notes:</p> <ul style="list-style-type: none"> • All new guttering is to comply with the provisions of AS 3500.
	<p>Condition Reason: To ensure compliance with the BCA and Home building Act 1989.</p>

<p>F. 2.</p>	<p>Requirement to Notify about New Evidence</p> <p>While site work is being carried out, any new information that comes to light, which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifier.</p> <p>Condition Reason: To ensure Council and the Principal Certifier are made aware of new information.</p>
<p>F. 3.</p>	<p>Critical Stage Inspections</p> <p>While site work is being carried out, critical stage inspections must be called for by the Principal Contractor or Owner-builder as required by the Principal Certifier, any PC service agreement, the Act, the Development Certification and Fire Safety Regulation, and the Regulation.</p> <p>Work must not proceed beyond each critical stage until the Principal Certifier is satisfied that work is proceeding in accordance with this consent, the construction certificate(s) and the Act.</p> <p>Critical stage inspections means the inspections prescribed by the Development Certification and Fire Safety Regulations, and Regulations for the purposes of section 6.5 of the Act or as required by the Principal Certifier and any PC Service Agreement.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The Principal Certifier may require inspections beyond mandatory critical stage inspections in order that the Principal Certifier be satisfied that work is proceeding in accordance with this consent. • The Principal Certifier may, in addition to inspections, require the submission of Compliance Certificates, survey reports or evidence of suitability in accordance with Part A2G2 of the BCA in relation to any matter relevant to the development. <p>Condition Reason: To ensure that building work progresses in accordance with the approved plans, conditions of consent, and requirements of the act.</p>
<p>F. 4.</p>	<p>Hours of Work –Amenity of the Neighbourhood</p> <p>While site work is being carried out:</p> <ol style="list-style-type: none"> a) No work must take place on any Sunday or public holiday. b) No work must take place before 7am or after 5pm any weekday. c) No work must take place before 7am or after 1pm any Saturday. d) The following work must not take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday: <ol style="list-style-type: none"> i. piling, ii. piling, iii. rock or concrete cutting, boring or drilling, iv. rock breaking, v. rock sawing, vi. jack hammering, or vii. machine excavation. e) No loading or unloading of material or equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday.

- f) No operation of any equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday.
- g) No rock excavation being cutting, boring, drilling, breaking, sawing , jack hammering or bulk excavation of rock, must occur without a 15 minute interval break within every hour.

Notes:

- The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.
- Each and every breach of this condition by any person may be subject to a separate penalty infringement notice or prosecution.
- The delivery and removal of plant, equipment and machinery associated with wide loads subject to Transport for NSW and NSW Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.
- Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the Protection of the Environment Operations Act 1997, the Protection of the Environment Operations (Noise Control) Regulation 2017.
- NSW EPA Noise Guide is available at www.epa.nsw.gov.au/noise/nglg.htm

Condition Reason: To mitigate the impact of work upon the amenity of the neighbourhood.

F. 5. Public Footpaths – Safety, Access and Maintenance

While site work is being carried out, any person acting with the benefit of this consent must:

- a) Not erect or maintain any gate or fence that swings out, or encroaches upon the road or the footway.
- b) Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c) Not use the road or footway for any work.
- d) Keep the road and footway in good repair free of any trip hazard or obstruction.
- e) Any damage caused to the road, footway, vehicular crossing, nature strip or any public place must be immediately made safe and then repaired, to the satisfaction of Council.
- f) Not stand any plant and equipment upon the road or footway.
- g) If it is proposed to locate any site fencing, hoardings, skip bins or other articles upon any part of the footpath, nature strip or any public place, or operate a crane, hoist or concrete pump on or over Council land, an application must be submitted to and approved by Council beforehand.
- h) Provide a clear safe pedestrian route a minimum of 1.5m wide.
- i) Protect heritage listed street name inlays located in the footpath, kerb and gutter, and any other structure, to ensure they are not removed or damaged during development.

	<p>This condition does not apply to the extent that a permit or approval exists under the section 148B of the Road Transport Act 2013, section 138 of the Roads Act 1993 or section 68 of the Local Government Act 1993 except that at all time compliance is required with:</p> <ul style="list-style-type: none"> a) Australian Standard AS 1742 (Set): Manual of uniform traffic control devices and all relevant parts of this set of standards. b) Australian Road Rules. <p>Notes:</p> <ul style="list-style-type: none"> • Section 148B of the Road Transport Act 2013 allows the NSW Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. • Section 138 of the Roads Act 1993 provides that a person must not: <ul style="list-style-type: none"> - erect a structure or carry out a work in, on or over a public road, or - dig up or disturb the surface of a public road, or - remove or interfere with a structure, work or tree on a public road, or - pump water into a public road from any land adjoining the road, or - connect a road (whether public or private) to a classified road, - otherwise than with the consent of the appropriate roads authority. • Section 68 of the Local Government Act 1993 provides that a person may carry out certain activities only with the prior approval of the Council including: <ul style="list-style-type: none"> - Part C Management of waste: <ul style="list-style-type: none"> a) For fee or reward, transport waste over or under a public place b) Place waste in a public place c) Place a waste storage container in a public place. - Part E Public roads: <ul style="list-style-type: none"> a) Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway b) Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.
	<p>Condition Reason: To ensure safe access is maintained to footpaths and roads during building works.</p>
<p>F. 6.</p>	<p>Maintenance of Environmental Controls</p> <p>While site work is being carried out, the following monitoring, measures and controls must be maintained:</p> <ul style="list-style-type: none"> a) erosion and sediment controls, b) dust controls, c) dewatering discharges, d) noise controls, e) vibration monitoring and controls, and f) ablutions. <p>Condition Reason: To ensure that environmental controls are maintained during building works to protect the public and surrounding environment.</p>
<p>F. 7.</p>	<p>Support of Adjoining Land and Buildings</p> <p>While site work is being carried out, a person must not to do anything on or in relation to the site (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).</p>

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

Notes:

- This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the Principal Contractor or Owner-builder must obtain:
 - the consent of the owners of such adjoining or supported land to trespass or encroach, or
 - an access order under the Access to Neighbouring Land Act 2000, or
 - an easement under section 88K of the Conveyancing Act 1919, or
 - an easement under section 40 of the Land and Environment Court Act 1979 as appropriate.
- Section 177 of the Conveyancing Act 1919 creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).
- Clause 17 of the Roads Regulation 2018 prohibits excavation in the vicinity of roads as follows: “Excavations adjacent to road - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.”
 Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.
- The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, Crown land under Council’s care control or management, or any community or operational land as defined by the Local Government Act 1993.

Condition Reason: To ensure that the support of adjoining land is not removed.

F. 8. Erosion and Sediment Controls – Maintenance

While site work is being carried out, water pollution, erosion, and sedimentation controls must be maintained in accordance with:

- a) the Soil and Water Management Plan required under this consent,
- b) “Do it Right On Site, Soil and Water Management for the Construction Industry” and the accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and
- c) “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book).

Where there is any conflict The Blue Book takes precedence.

Notes:

- A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.
- Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”.
- Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.

	<p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
F. 9.	<p>Disposal of Site Water During Construction</p> <p>While site work is being carried out:</p> <ul style="list-style-type: none"> a) Prior to pumping any water into the road or public stormwater system, approval must be obtained from Council under section 138(1)(d) of the Roads Act 1993. b) Water pollution, as defined by the Protection of the Environment Operations Act 1997, must not occur as the result of the discharge to the road, public stormwater system or other place of any site water. c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas. <p>Condition Reason: To ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not cause erosion and water pollution.</p>
F. 10.	<p>Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum</p> <p>While site work is being carried out, a registered surveyor must carry out check surveys and provide survey certificates confirming the location of the building(s), ancillary works, flood protection works and the stormwater drainage system relative to the boundaries of the site and that the height of buildings, ancillary works, flood protection works and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.</p> <p>Work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the Principal Certifier's satisfaction:</p> <ul style="list-style-type: none"> a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level. b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey. c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof. d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structure, flood protection work, swimming pool or spa pool or the like. e) Upon the completion of formwork and steel fixing prior to pouring of any concrete for driveways showing transitions and crest thresholds confirming that driveway levels match Council approved driveway crossing levels and minimum flood levels. f) Stormwater drainage Systems are in place prior to back filling over pipes confirming location, height and capacity of works. g) Flood protection measures are in place confirming location, height and capacity. <p>Condition Reason: To ensure that development occurs in the location and at the height approved under this consent, which is critical to ensure that buildings are constructed to minimum heights for flood protection and maximum heights to protect views and the amenity of neighbours.</p>

<p>F. 11.</p>	<p>Placement and Use of Skip Bins</p> <p>While site work is being carried out, all waste storage containers, including but not limited to skip bins, must be stored within the site unless:</p> <p>a) Activity Approval has been issued by Council under section 68 of the Local Government Act 1993 to place the waste storage container in a public place; and b) where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules.</p> <p>Notes:</p> <ul style="list-style-type: none"> Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards. <p>Condition Reason: To ensure waste storage containers are appropriately located.</p>
<p>F. 12.</p>	<p>Prohibition of Burning</p> <p>While site work is being carried out, there must be no burning of any waste or other materials. The burning of copper chrome arsenate (CCA) or pentachlorophenol (PCP) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.</p> <p>Notes:</p> <ul style="list-style-type: none"> Under the Protection of the Environment Operations (Clean Air) Regulation 2021 all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning. <p>Condition Reason: To ensure no burning of waste occurs.</p>
<p>F. 13.</p>	<p>Dust Mitigation</p> <p>While site work is being carried out, dust mitigation must be implemented in accordance with “Dust Control - Do it right on site” and the accompanying facts sheets published by the Southern Sydney Regional Organisation of Councils.</p> <p>This generally requires:</p> <p>a) Dust screens to all hoardings and site fences. b) All stockpiles or loose materials to be covered when not being used. c) All equipment, where capable, being fitted with dust catchers. d) All loose materials being placed bags before placing into waste or skip bins. e) All waste and skip bins being kept covered when not being filled or emptied. f) The surface of excavation work being kept wet to minimise dust. g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.</p> <p>Notes:</p> <ul style="list-style-type: none"> “Dust Control - Do it right on site” and the accompanying factsheets can be downloaded from Council’s website www.woollahra.nsw.gov.au Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.safework.nsw.gov.au and www.epa.nsw.gov.au. Other specific conditions and advice may apply. Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.

	<p>Condition Reason: To mitigate the impact of dust upon the amenity of the neighbourhood and prevent water pollution.</p>
<p>F. 14.</p>	<p>Site Waste Minimisation and Management – Demolition</p> <p>While site work is being carried out, in order to maximise resource recovery and minimise residual waste from demolition activities:</p> <ol style="list-style-type: none"> a) the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work, b) an area is to be allocated for the storage of materials for use, recycling and disposal (giving consideration to slope, drainage, location of waterways, stormwater outlets, vegetation and access and handling requirements), c) separate collection bins and/or areas for the storage of residual waste are to be provided, d) the purpose and content of the bins and/or storage areas are to be clearly ‘signposted’, e) measures to prevent damage by the elements, odour, health risks and windborne litter are to be implemented, and f) site disturbance must be minimised, and unnecessary excavation limited. <p>When implementing the SWMMP the Applicant must ensure:</p> <ol style="list-style-type: none"> a) footpaths, public reserves and street gutters are not used as places to store demolition waste or materials of any kind without Council approval, b) any material moved offsite is transported in accordance with the requirements of the Protection of the Environment Operations Act 1997, c) waste is only transported to a place that can lawfully be used as a waste facility, d) generation, storage, treatment and disposal of hazardous waste and special waste (including asbestos) is conducted in accordance with relevant waste legislation administered by the NSW Environment Protection Authority, and relevant occupational health and safety legislation administered by SafeWork NSW, and e) evidence such as weighbridge dockets and invoices for waste disposal or recycling services are retained. <p>Notes:</p> <ul style="list-style-type: none"> • Materials that have an existing reuse or recycling market must not be disposed of in a land fill. Reuse and recycling opportunities are decreased when asbestos is not carefully removed and segregated from other waste streams. <p>Condition Reason: To maximise resource recovery and minimise residual waste from demolition activities.</p>
<p>F. 15.</p>	<p>Site Waste Minimisation and Management – Construction</p> <p>While site work is being carried out, in order to maximise resource recovery and minimise residual waste from construction activities:</p> <ol style="list-style-type: none"> a) the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work, b) deliveries of materials must be arranged so that materials are delivered ‘as needed’ to prevent the degradation of materials through weathering and moisture damage, c) consideration must be given to returning excess materials to the supplier or manufacturer, d) an area must be allocated for the storage of materials for use, recycling and disposal (considering slope, drainage, location of waterways, stormwater outlets and vegetation), e) the purpose and content of the storage areas must be clearly ‘signposted’,

	<p>f) contractors must be arranged for the transport, processing and disposal of waste and recycling and all contractors must be aware of the legal requirements for disposing of waste,</p> <p>g) separate collection bins or areas for the storage of residual waste must be promoted,</p> <p>h) measures to prevent damage by the elements, odour and health risks, and windborne litter must be implemented,</p> <p>i) site disturbance must be minimised and unnecessary excavation limited,</p> <p>j) all waste must be transported to a place that can lawfully be used as a waste facility, and</p> <p>k) records demonstrating lawful disposal of waste must be retained and kept readily accessible for inspection by regulatory authorities such as Council, the NSW EPA or SafeWork NSW.</p> <p>Condition Reason: To maximise resource recovery and minimise residual waste from construction activities.</p>
<p>F. 16.</p>	<p>Asbestos Removal</p> <p>While site work is being carried out, all asbestos removal work must be carried out safely according to NSW work health and safety legislation.</p> <p>Where hazardous material, including bonded or friable asbestos has been identified in accordance with the conditions in Section B above, and such material must be demolished, disturbed and subsequently removed, all such works must comply with the following criteria:</p> <p>a) Be undertaken by contractors who hold a current SafeWork NSW “demolition licence” and a current SafeWork NSW “Class A licence” for friable asbestos removal.</p> <p>b) Be carried out in accordance with the relevant SafeWork NSW codes of practice.</p> <p>c) No asbestos products may be reused on the site.</p> <p>d) No asbestos laden skip or bins must be left in any public place.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Before starting work, a work site-specific permit approving each asbestos project must be obtained from SafeWork NSW. A permit will not be granted without a current SafeWork licence. • All removal, repair or disturbance of or to asbestos material must comply with: <ul style="list-style-type: none"> - Work Health and Safety Act 2011, - Work Health and Safety Regulation 2017, - SafeWork NSW “Code of Practice: How to Safely Remove Asbestos” (2016), and - SafeWork NSW “Code of Practice: How to Manage and Control Asbestos in the Workplace” (2016). • For more information go to the SafeWork NSW website on asbestos www.safework.nsw.gov.au/health-and-safety/safety-topics-a-z/asbestos, and www.safework.nsw.gov.au/law-and-policy/legislation-and-codes/codes-of-practice or call 131 050 <p>Condition Reason: To ensure the safe removal of asbestos and protect the health and safety of persons working on the site and the public.</p>

<p>F. 17.</p>	<p>Classification of Hazardous Waste</p> <p>While site work is being carried out, and prior to the exportation of hazardous waste (including hazardous fill or soil) from the site, the waste materials must be classified in accordance with the provision of the Protection of the Environment Operations Act 1997 and the NSW EPA Waste Classification Guidelines, Part1: Classifying Waste, 2014.</p> <p>Condition Reason: To ensure that where hazardous waste will be removed from a site an asbestos licensed contractor can definitively determine where the waste may be legally taken for disposal.</p>
<p>F. 18.</p>	<p>Disposal of Asbestos and Hazardous Waste</p> <p>While site work is being carried out, asbestos and hazardous waste, once classified in accordance with the hazardous waste classification condition must only be transported to waste facilities licensed to accept asbestos and appropriate classifications of hazardous waste.</p> <p>Condition Reason: To ensure that asbestos and other hazardous waste is disposed of lawfully under the Protection of the Environment Operations Act 1997 and relevant NSW EPA requirements.</p>
<p>F. 19.</p>	<p>Asbestos Removal Signage</p> <p>While site work is being carried out and when asbestos is being removed, standard commercially manufactured signs containing the words "DANGER ASBESTOS REMOVAL IN PROGRESS" measuring not less than 400mm x 300mm are to be erected in prominent visible positions on the site.</p> <p>Condition Reason: To ensure awareness of any hazard to the health and safety of persons working on the site and public.</p>
<p>F. 20.</p>	<p>Notification of Asbestos Removal</p> <p>While site work is being carried out, in addition to the requirements for licensed asbestos removalists to give written notice to SafeWork NSW, all adjoining properties and those opposite the development site must be notified in writing of the dates and times when asbestos removal is to be conducted.</p> <p>The notification is to identify the licensed asbestos removal contractor and include a contact person for the site together with telephone and facsimile numbers and email addresses.</p> <p>Condition Reason: To ensure that local residents are informed and have adequate contact details for incidents of asbestos removal.</p>
<p>F. 21.</p>	<p>Tree Preservation</p> <p>While site work is being carried out, all persons must comply with Chapter E.3 – <i>Tree Management</i> of Council’s Development Control Plan (DCP) 2015, other than where varied by this consent. The DCP applies to any tree with a height greater than 5 metres or a diameter spread of branches greater than 3 metres.</p> <p>General Protection Requirements:</p> <p>a) The tree protection measures must be maintained during all development work unless otherwise specified within these conditions of consent.</p>

		<p>b) Excavation must cease where tree roots with a diameter exceeding 50mm are exposed. The principal contractor must procure an inspection of the exposed tree roots by an arborist with a minimum AQF Level 5 qualification. Excavation must only recommence with the implementation of the recommendations of the arborist.</p> <p>c) Where there is damage to any part of a tree the principal contractor must procure an inspection of the tree by a qualified arborist immediately. The principal contractor must immediately implement treatment as directed by the arborist. The arborist is to supply a detailed report to the appointed certifier.</p> <p>Trees must be pruned in accordance with Australian Standard AS 4373 “Pruning of Amenity Trees” and WorkCover NSW Code of Practice Amenity Tree Industry.</p>
		<p>Condition Reason: To protect trees during the carrying out of sitework. Standard Condition F.8 (Autotext 8F)</p>

G. BEFORE ISSUE OF AN OCCUPATION CERTIFICATE

G. 1.	Occupation Certificate (section 6.9 of the Act)	<p>A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 6.10 of the Act) unless an occupation certificate has been issued in relation to the building or part.</p> <p>Notes:</p> <ul style="list-style-type: none"> • New building includes an altered portion of, or an extension to, an existing building.
		<p>Condition Reason: To ensure the building is suitable to occupy.</p>
G. 2.	Commissioning and Certification of Systems and Works	<p>Before the issue of any occupation certificate, works-as-executed (WAE) plans prepared by a registered surveyor, compliance certificates, and evidence of suitability in accordance with Part A5G1 of the BCA confirming that the works, as executed and as detailed, comply with the requirement of this consent, the Act, the Regulations, any relevant construction certificate, the BCA and relevant Australian Standards must be submitted to the satisfaction of the Principal Certifier.</p> <p>Works-as-executed plans, compliance certificates, and evidence of suitability in accordance with Part A5G1 of the BCA must include, but may not be limited to:</p> <ol style="list-style-type: none"> a) Certification from the supervising professional engineer that the requirement of the Geotechnical/Hydrogeological conditions and report recommendations were implemented and satisfied during development work. b) All flood protection measures. c) All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1: Off-Street car parking. d) All stormwater drainage and storage systems. e) All mechanical ventilation systems. f) All hydraulic systems. g) All structural work. h) All acoustic attenuation work. i) All waterproofing. j) Such further matters as the Principal Certifier may require.

	<p>Notes:</p> <ul style="list-style-type: none"> The PC may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the Act, Regulation, development standards, BCA, and relevant Australia Standards. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services). The PC must submit to Council, with any occupation certificate, copies of WAE plans, compliance certificates and evidence of suitability in accordance with Part A5G1 of the BCA upon which the PC has relied in issuing any occupation certificate. <p>Condition Reason: To ensure that systems and works as completed meet development standards as defined by the Act, comply with the BCA, and this consent, and to ensure a public record of works as executed is maintained.</p>
<p>G. 3.</p>	<p>Removal of Ancillary Works and Structures</p> <p>Before the issue of any occupation certificate for the whole of the building, The following articles must be removed from the land and any adjoining public place:</p> <ol style="list-style-type: none"> the site sign, ablutions, hoarding, scaffolding, and waste materials, matter, article or thing. <p>Condition Reason: To ensure that all ancillary matter is removed prior to occupation.</p>
<p>G. 4.</p>	<p>Works-As-Executed Certification of Stormwater Systems</p> <p>Before the issue of an occupation certificate for the whole of the building, and on the completion of construction work, stormwater drainage works are to be certified by a professional engineer with works-as-executed drawings supplied to the Principal Certifier detailing:</p> <ol style="list-style-type: none"> compliance with conditions of development consent relating to stormwater, pipe invert levels and surface levels to Australian Height Datum, and contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits. <p>Notes:</p> <ul style="list-style-type: none"> The occupation certificate for the whole of the building must not be issued until this condition has been satisfied. <p>Condition Reason: To ensure the certification and ongoing maintenance of the stormwater system prior to the occupation of the whole building.</p>

H. OCCUPATION AND ONGOING USE

SUBDIVISION WORK

I. BEFORE ISSUE OF A SUBDIVISION WORKS CERTIFICATE

Nil.

J. BEFORE SUBDIVISION WORK COMMENCES

Nil.

K. BEFORE ISSUE OF A SUBDIVISION CERTIFICATE

Nil.

LAND SUBDIVISION

L. BEFORE ISSUE OF A SUBDIVISION CERTIFICATE

Nil.

STRATA SUBDIVISION

M. BEFORE ISSUE OF A STRATA CERTIFICATE

Nil.

Note: In accordance with the Woollahra Local Planning Panel Operational Procedures the votes are recorded on this planning matter.

For the Motion

Against the Motion

Judith Clark
Penelope Holloway
Sandra Robinson
Ronald Schaffer

4/0

ITEM No.	D4
FILE No.	DA301/2023/1
ADDRESS	464 Oxford Street Paddington
PROPOSAL	Alterations and additions to the existing building and change of use from retail to a licensed restaurant

Reasons for Decision

The Panel has considered any submissions and reviewed the assessment report prepared by Council officers that addresses the relevant matters detailed in Section 4.15 of the Environmental Planning and Assessment Act 1979.

For the reasons generally in the assessment report, the Panel is satisfied that the application can be approved subject to the conditions in the assessment report.

Resolved: Pursuant to Section 4.16 of the Environmental Planning and Assessment Act 1979

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, is satisfied that the written request from the applicant under Clause 4.6 of the Woollahra Local Environmental Plan 2014 to the Floor space ratio development standard under Clause 4.4 of Woollahra LEP 2014 has adequately addressed the relevant matters and the proposed development will be in the public interest because it is consistent with the relevant objectives of the particular standard and the zone. The Panel assumes the concurrence of the Secretary, Department of Planning, Industry and Environment.

AND

THAT the Woollahra Local Planning Panel, exercising the functions of Council, as the consent authority, grant development consent to Development Application No. 301/2023/1 for alterations and additions to the existing building and change of use from retail to a licensed restaurant on land at 464 Oxford Street Paddington, subject to the following conditions:

ALL DEVELOPMENT TYPES

A. GENERAL CONDITIONS

A. 1.	<p>Conditions</p> <p>Consent is granted subject to the following conditions imposed under section 4.16 of the Environmental Planning and Assessment Act 1979 (“the Act”), and the provisions of the Environmental Planning and Assessment Regulation 2021 (“the Regulations”) and the provisions of the Environmental Planning and Assessment (Development Certification and Fire Safety) Regulation 2021 (“the Development Certification and Fire Safety Regulations”), such conditions being reasonable and relevant to the development as assessed under section 4.15 of the Act.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Failure to comply with this development consent and any condition of this consent is a criminal offence. Failure to comply with other environmental laws is also a criminal offence. • Where there is any breach Council may without any further warning: <ul style="list-style-type: none"> a) Issue Penalty Infringement Notices (On-the-spot fines); b) Issue notices and orders; c) Prosecute any person breaching this consent; and/or d) Seek injunctions/orders before the courts to restrain and remedy any breach. • Maximum penalties under NSW environmental laws include fines up to \$1.1 Million and/or custodial sentences for serious offences. • Should Council have to take any action to enforced compliance with this consent or other environmental laws Council’s policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order. • This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action. • The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of the Crimes (Sentencing Procedure) Act 1999, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. <p>Condition Reason: To ensure all parties are aware of the relevant legislation that applies to the development.</p>
A. 2.	<p>Definitions</p> <p>Unless specified otherwise, words have the same meaning as defined by the <i>Act</i>, the <i>Regulations</i>, the <i>Development Certification and Fire Safety Regulations</i> and the <i>Interpretation Act 1987</i> as in force at the date of consent.</p> <p>Applicant means the applicant for this consent.</p> <p>Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.</p> <p>Local native plants means species of native plant endemic to Sydney’s eastern suburbs.</p> <p>Owner-builder has the same meaning as in the <i>Home Building Act 1989</i>.</p>

	<p>PC means the Principal Certifier under the <i>Act</i>.</p> <p>Principal Contractor has the same meaning as in the <i>Act</i>, or where a Principal Contractor has not been appointed by the Owner of the land being developed Principal Contractor means the Owner of the land being developed.</p> <p>Professional engineer has the same meaning as in the BCA.</p> <p>Public place has the same meaning as in the <i>Local Government Act 1993</i>.</p> <p>Road has the same meaning as in the <i>Roads Act 1993</i>.</p> <p>SEE means the final version of the Statement of Environmental Effects lodged by the Applicant.</p> <p>Site means the land being developed subject to this consent.</p> <p>Site work means any work that is physically carried out on the land to which the development the subject of this development consent is to be carried out, including but not limited to building work, subdivision work, demolition work, clearing of vegetation or remediation work.</p> <p>Woollahra LEP means <i>Woollahra Local Environmental Plan 2014</i></p> <p>Woollahra DCP means <i>Woollahra Development Control Plan 2015</i></p> <p>Work for the purposes of this consent means:</p> <ul style="list-style-type: none"> • the use of land in connection with development, • the subdivision of land, • the erection of a building, • the carrying out of any work, • the use of any site crane, machine, article, material, or thing, • the storage of waste, materials, site crane, machine, article, material, or thing, • the demolition of a building, • the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land, • the delivery to or removal from the <i>site</i> of any machine, article, material, or thing, or • the occupation of the <i>site</i> by any person unless authorised by an occupation certificate. <p>Condition Reason: To ensure all parties are aware of the relevant definitions.</p>
<p>A. 3.</p>	<p>Approved Plans and Supporting Documents</p> <p>Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with both the architectural plans to which is affixed a Council stamp “Approved” and supporting documents listed below unless modified by any following condition.</p> <p>Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.</p>

Reference	Description	Author	Date
DA2023-019 A1001 (Rev 1)	Demolition Plan	BJB Architects	18.08.2023
DA2023-019 A1101 (Rev 1)	Ground Floor/Site Plan	BJB Architects	18.08.2023
DA2023-019 A1111(Rev 1)	First Floor Plan	BJB Architects	18.08.2023
DA2023-019 A1121(Rev 1)	Roof Plan	BJB Architects	18.08.2023
DA2023-019 A1131 (Rev 1)	Kitchen Bench Plan	BJB Architects	18.08.2023
DA2023-019 A1201(Rev 1)	Sections	BJB Architects	18.08.2023
DA2023-019 A1202(Rev 1)	Sections	BJB Architects	18.08.2023
DA2023-019 A1203(Rev 1)	Detail Sections	BJB Architects	18.08.2023
DA2023-019 A1301(Rev 1)	Elevations	BJB Architects	18.08.2023
DA2023-019 A1302 (Rev 1)	Elevations	BJB Architects	18.08.2023
DA2023-019 A1303(Rev 1)	Elevations	BJB Architects	08.04.2024
	Operational Plan of Management (Submitted to Council on 11/03/2024)	BMA Urban	Aug 2023
230402	Noise Impact Assessment	Pulse White Noise Acoustics	16/08/2023
23137	Amended Traffic and Parking Assessment Report	CJP Consulting Engineers	11 Mar 2024
	Site Waste Minimisation and Management Plan	Jim Apostolou	17.08.2023

Notes:

- Warning to Principal Certifier – You must always insist on sighting the original Council stamped approved plans. You must not rely solely upon the plan reference numbers in this condition. Should the Applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plans.
- These plans and supporting documentation may be subject to conditions imposed under section 4.17(1)(g) of the Act modifying or amending the development.

Condition Reason: To ensure all parties are aware of the approved plans and supporting documentation that applies to the development.

A. 4. Development Consent is Not Granted in Relation to these Matters

This approval does not give consent to any new signage. A separate Development Consent or Complying Development Certificate, and certificates under section 6.4 of the Act, as appropriate, will need to be obtained prior to such development work commencing.

Condition Reason: To ensure all parties are aware of works that have not been granted consent.

A. 5.	<p>Ancillary Aspects of Development (section 4.17(2) of the Act)</p> <p>The Owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's Specification for Roadworks, Drainage and Miscellaneous Works (2012) unless expressly provided otherwise by these conditions at the Owner's expense.</p> <p>Notes:</p> <ul style="list-style-type: none"> This condition does not affect the Principal Contractor's or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs. <p>Condition Reason: To ensure all parties are aware of works required to public infrastructure and to ensure payment for works.</p>
--------------	--

DEMOLITION WORK

B. BEFORE DEMOLITION WORK COMMENCES

B. 1.	<p>Construction Certificate Required Prior to Any Demolition</p> <p>Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" under section 6.6 of the Act.</p> <p>In such circumstance all conditions included at the following development stages of this consent must be satisfied prior to any demolition work:</p> <ul style="list-style-type: none"> Before issue of a construction certificate Before building work commences <p>This includes, but is not limited to, the issue of a Construction Certificate, appointment of a Principal Certifier, and Notice of Commencement under the Act.</p> <p>Note:</p> <ul style="list-style-type: none"> See Over our Dead Body Society Inc v Byron Bay Community Association Inc [2001] NSWLEC 125. <p>Condition Reason: To ensure appropriate conditions are complied with for development for the alteration and extension of an existing building.</p>
B. 2.	<p>Erosion and Sediment Controls – Installation</p> <p>Before any site work commences, water pollution, erosion and sedimentation controls must be installed and maintained in accordance with:</p> <ol style="list-style-type: none"> “Do it Right On Site, Soil and Water Management for the Construction Industry” and accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book). <p>Where there is any conflict The Blue Book takes precedence.</p>

	<p>Notes:</p> <ul style="list-style-type: none"> The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au and The Blue Book is available at www.environment.nsw.gov.au A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution. Section 257 of the Protection of the Environment Operations Act 1997 provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of their occupation of the land being developed. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>B. 3.</p>	<p>Identification of Hazardous Material</p> <p>Prior to any site works, and in accordance with Australian Standard AS2601: The Demolition of Structures, all hazardous substances located on the site must be identified, including asbestos, polychlorinated biphenyls (PCBs), lead paint, underground storage tanks, chemicals, etc.</p> <p>In this regard, prior to any site works, Council must be provided with a written report prepared by a suitably qualified competent person detailing:</p> <ul style="list-style-type: none"> all hazardous materials identified on the site, the specific location of all hazardous materials identified, whether the hazardous materials are to be removed from the site as part of the works to be undertaken, and safety measures to be put in place. <p>Condition Reason: To protect the health and safety of all persons while works are being undertaken and to ensure all safety measures have been identified and are in place to protect all parties in the immediate vicinity of the site.</p>
<p>B. 4.</p>	<p>Public Road Assets Prior to Any Work/Demolition</p> <p>Prior to any site works, a full record of the condition of the public infrastructure on public land adjacent to the development site must be submitted to Council.</p> <p>The report must include photographs and/or CCTV footage showing the current condition and any existing damage fronting and adjoining the site to the:</p> <ul style="list-style-type: none"> road pavement, street signage including street lights, kerb and gutter, footway including pedestrian crossings, footpath, and driveways, retaining walls, or other significant structures, Heritage Items, including street name inlays, utility service items including historical utility covers, and drainage structures/pits/pipes (CCTV footage).

The reports are to be supplied in electronic format in Word and if applicable accompanied by CCTV footage. Photographs are to be in colour, digital and date stamped.

If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any site works under this consent.

Condition Reason: To clarify the condition of the existing public infrastructure prior to the commencement of any site works.

B. 5. Payment of Security and Fees

Prior to any site works, the following security and fees must be paid in full:

Description	Amount	Indexed	Council Fee Code
SECURITY under section 4.17(6) of the <i>Environmental Planning and Assessment Act 1979</i>			
Property Damage Security Deposit - making good any damage caused to any property of the Council	\$17,672.00	No	T115
INSPECTION FEES under section 608 of the <i>Local Government Act 1993</i>			
Security Deposit Administration Fee	\$225.00	No	T16
TOTAL SECURITY AND FEES	\$17,897.00		

How must the payments be made?

Payments must be made by:

- cash deposit with Council,
- credit card payment with Council, or
- bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- the guarantee is by an Australian bank for the amount of the total outstanding contribution,
- the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first [NOTE: a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable],
- the bank agrees to pay the guaranteed sum without reference to the Applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent,
- the bank guarantee is lodged with the Council prior to any site works being undertaken, and
- the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Notes:


- An application must be made to Council by the person who paid the security for release of the securities held under section 4.17 of the Act.

	<ul style="list-style-type: none"> • The securities will not be released until the Occupation Certificate has been lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council’s requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council’s requirements. • Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council’s satisfaction as the case may be. • Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed. • Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period. • The Refund of Security Bond Application form can be downloaded from www.woollahra.nsw.gov.au
	<p>Condition Reason: To ensure any relevant security and fees are paid.</p>
<p>B. 6.</p>	<p>Adjoining Buildings Founded on Loose Foundation Materials</p> <p>Before any site work commences, a professional engineer must determine the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The professional engineer (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis, and any reasonable direction of the professional engineer must be complied with.</p> <p>Notes:</p> <ul style="list-style-type: none"> • A failure to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. • The person with the benefit of this consent is likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the Conveyancing Act 1919. <p>Condition Reason: To ensure professional engineering advice is obtained to confirm that appropriate underpinning and support to adjoining land is maintained.</p>
<p>B. 7.</p>	<p>Works (Construction) Zone – Approval and Implementation</p> <p>If the Construction Management Plan relies upon a Works Zone, before any site work commences, a Works Zone application must be made.</p> <p>If the works zone is approved, all fees for the Works Zone must be paid before it can be installed.</p> <p>All Works Zone signs must have been erected by Council to permit enforcement of the Works Zone by Council’s Rangers and NSW Police before commencement of any site work. Signs are not erected until full payment of Works Zone fees is made.</p> <p>Notes:</p> <ul style="list-style-type: none"> • A minimum of four to six weeks must be allowed (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under clause 20 of the Transport Administration (General) Regulation 2018 to exercise those functions delegated by Transport for New South Wales under section 31(3) of the Transport Administration Act 1988. • The enforcement of the Works Zone is at the discretion of Council's Rangers and the NSW Police Service. Any breach of the Works Zone must be reported to either Council or the NSW Police Service.

Condition Reason: To facilitate the efficient operation of construction projects and to minimise traffic disruption.


B. 8. Security Fencing, Hoarding (including ‘Creative Hoardings’) and Overhead Protection

Before any site work commences, security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

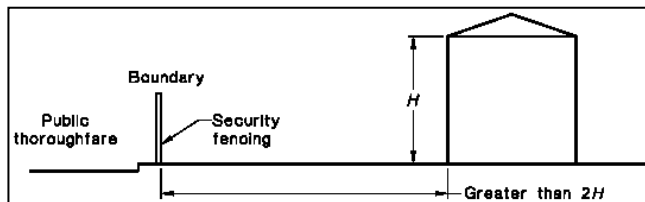

Type A Hoarding

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8m adjacent to the thoroughfare.




Type B Hoarding

Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an overhead protective structure and the facing facade protected by heavy-duty scaffolding, unless either:

- a) the vertical height above footpath level of the structure being demolished is less than 4.0m; or
- b) the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must:

- a) extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary,
- b) have a clear height above the footpath of not less than 2.1m,
- c) terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5m above the platform surface, and
- d) together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

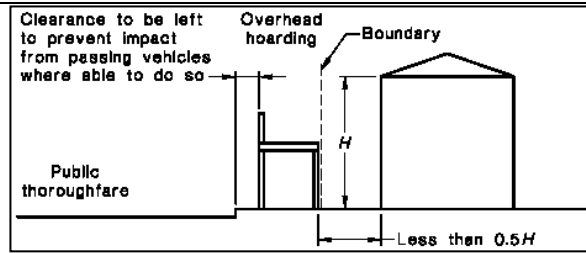

The overhead protective structures must be installed and maintained in accordance with the NSW “Code of Practice - Overhead Protective Structures 1995”. This is code available at www.safework.nsw.gov.au/___data/assets/pdf_file/0008/52883/Overhead-protective-structures-Code-of-practice.pdf

All Hoardings

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Hoardings on Public Land including ‘Creative Hoardings’

All fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection must be paid in full.

A creative hoarding (i.e. an approved artwork or historic image affixed to the hoarding) is required if the hoarding meets the criteria in Council’s Creative Hoardings Policy (adopted March 2020). The cost of printing and affixing the creative hoarding is the responsibility of the person with the benefit of this consent. The Creative Hoardings Policy can be downloaded from Council’s website www.woollahra.nsw.gov.au

Notes:

- A minimum of two (2) weeks from the date of making a hoarding application to determination must be allowed. Any approval for a hoarding or overhead protection under the Roads Act 1993 will be subject to its own conditions and fees.
- Council seeks to increase public art in the public domain by requiring artwork or historic images on hoardings located on public land. Under the Creative Hoardings Policy an application for a hoarding proposed on public land will require an approved artwork or historic image affixed to the hoarding if the hoarding meets the criteria in section 3 of the Policy:
 - A. Hoardings proposed on land zoned E1 Local Centre, or MU1 Mixed Use, or SP2 Infrastructure under Woollahra Local Environmental Plan 2014 AND erected for 8 weeks or more
OR
 - B. Hoardings proposed on land located along a State classified road (regardless of the zone) AND erected for 8 weeks or more
OR
 - C. Hoardings proposed in any other location than that referred to in A. and B. above AND erected for 12 weeks or more, except where:
 1. the capital investment value of the work to which the hoarding relates is less than \$1 million, or
 2. the land is zoned R2 Low Density Residential, or
 3. the land is zoned R3 Medium Density Residential and the hoarding is located in a lane or street that does not have through traffic (e.g. a cul-de-sac or no through road).
- Artwork and historic images for the hoardings are assessed and approved in accordance with the Creative Hoardings Policy. Details of the artwork or images proposed to be affixed to the hoardings must be submitted with Council’s form “Application for a permit to use a footpath for the erection of a hoarding/scaffolding”. The Creative Hoardings Policy can be downloaded from www.woollahra.nsw.gov.au

	<p>Condition Reason: To ensure public safety.</p>
<p>B. 9.</p>	<p>Site Signs</p> <p>Before any site work commences, the sign/s required by clauses 70 of the Regulation and 75 of the Development Certification and Fire Safety Regulation must be erected and maintained at all times.</p> <p>Clause 70 of the Regulation provides:</p> <p>Erection of signs</p> <ul style="list-style-type: none"> • For the purposes of section 4.17(11) of the Act, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work. • A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out: <ul style="list-style-type: none"> a) showing the name, address and telephone number of the principal certifier for the work, and b) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and c) stating that unauthorised entry to the work site is prohibited. • Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed. • This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building. • This clause does not apply in relation to Crown building work that is certified, in accordance with section 6.28 of the Act, to comply with the Building Code of Australia. <p>Clause 75 of the Development Certification and Fire Safety Regulation provides:</p> <p>Signs on development sites</p> <p>If there is a person who is the Principal Certifier or the Principal Contractor for any building work, subdivision work or demolition work authorised to be carried out on a site by a development consent or complying development certificate:</p> <ul style="list-style-type: none"> • Each such person MUST ensure that a rigid and durable sign showing the person's identifying particulars so that they can be read easily by anyone in any public road or other public place adjacent to the site is erected in a prominent position on the site before the commencement of work, and is maintained on the site at all times while this clause applies until the work has been carried out. <p>Notes:</p> <ul style="list-style-type: none"> • Clause 75 of the Development Certification and Fire Safety Regulations imposes a maximum penalty of 55 penalty units if these requirements are not complied with. • If Council is appointed as the Principal Certifier it will provide the sign to the Principal Contractor or Owner-builder who must ensure that the sign is erected and maintained as required by clause 70 of the Regulation and clause 75 of the Development Certification and Fire Safety Regulation.
	<p>Condition Reason: To ensure that contact details for the principal certifier and principal contractor are provided on a sign at the development site.</p>

<p>B. 10.</p>	<p>Toilet Facilities</p> <p>Before any site work commences, toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.</p> <p>Each toilet provided:</p> <ol style="list-style-type: none"> a) must be a standard flushing toilet, and b) must be connected to a public sewer, or c) if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the Council, or d) if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the Council. <p>The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.</p> <p>Notes:</p> <ul style="list-style-type: none"> • In this condition 'sewage management facility' and 'public sewer' are as defined by clause 25 of the Local Government (Approvals) Regulation 1999. • This condition does not set aside the requirement to comply with SafeWork NSW requirements. <p>Condition Reason: To ensure toilet facilities are provided for workers at the work site.</p>
<p>B. 11.</p>	<p>Establishment of Boundary Location, Building Location and Datum</p> <p>Before any site work commences, a surveyor registered under the Surveying and Spatial Information Act 2002 must:</p> <ol style="list-style-type: none"> a) set out the boundaries of the site by permanent marks (including permanent recovery points), b) set out the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum (AHD) in compliance with the approved plans, c) establish a permanent datum point (bench mark) within the boundaries of the site relative to AHD, and d) provide a copy of a survey report, prepared by the registered surveyor, detailing the title boundaries, pegs/profiles, recovery points and bench mark locations as established under this condition to the Principal Certifier. <p>Notes:</p> <ul style="list-style-type: none"> • Where there is any discrepancy between the approved development consent and the Construction Certificate, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the site works must not proceed until the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent. • On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks must be considered by the registered surveyor. <p>Condition Reason: To ensure that the boundary locations, building location, and a datum point is established by a surveyor.</p>

<p>B. 12.</p>	<p>Compliance with Australian Standard for Demolition</p> <p>While site work is being carried out, the demolition of buildings and structures must comply with Australian Standard AS 2601—2001: The Demolition of Structures.</p> <p>Condition Reason To control the risks of demolition work.</p>
<p>B. 13.</p>	<p>Construction Management Plan</p> <p>Before any site work commences, and as a result of the site constraints, limited space and access, a Construction Management Plan (CMP) is to be submitted to Council for approval. Also, due to lack of on-street parking a Work Zone may be required during construction.</p> <p>An application for the CMP must be submitted for approval, and all associated application fees must be paid.</p> <p>The CMP must be submitted as a self-contained document that outlines the nature of the construction project and as applicable, include the following information:</p> <ol style="list-style-type: none"> a) Detail the scope of the works to be completed including details of the various stages, e.g. demolition, excavation, construction etc. and the duration of each stage. b) Identify local traffic routes to be used by construction vehicles. c) Identify ways to manage construction works to address impacts on local traffic routes. d) Identify other developments that may be occurring in the area and identify ways to minimise the cumulative traffic impact of these developments. Should other developments be occurring in close proximity (500m or in the same street) to the subject site, the developer/builder is to liaise fortnightly with the other developers/builders undertaking work in the area in order to minimise the cumulative traffic and parking impacts of the developments. e) Detail how construction workers will travel to and from the site and parking arrangements for those that drive. f) Identify any proposed road closures, temporary traffic routes, loss of pedestrian or cyclist access, or reversing manoeuvres onto a public road, and provide Traffic Control Plans (TCPs) prepared by an accredited RMS Red or Orange card holder to manage these temporary changes. g) Detail the size (including dimensions), numbers and frequency of arrival of the construction vehicles that will service the site for each stage of works. h) Provide for the standing of vehicles during construction. i) If construction vehicles are to be accommodated on the site, provide a scaled drawing showing where these vehicles will stand and the vehicle swept path to show that these vehicles can access and egress the site in a forward direction (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.). j) If trucks are to be accommodated on Council property, provide a scaled drawing showing the location of any proposed Works Zone (including dimensions and all adjacent traffic control devices, such as parking restrictions, pedestrian facilities, kerb extensions, etc.). k) Show the location of any site sheds and any anticipated use of cranes and concrete pumps and identify the relevant permits that will be required.

	<p>l) If a crane/s are to be accommodated on site, detail how the crane/s will be erected and removed, including the location, number and size of vehicles involved in the erection/removal of the crane/s, the duration of the operation and the proposed day and times, any full or partial road closures required to erect or remove the crane/s and appropriate Traffic Control Plans (TCPs) prepared by an approved RMS Red or Orange Card holder.</p> <p>m) Make provision for all materials, plant, etc. to be stored within the development site at all times during construction.</p> <p>n) State that any oversized vehicles proposed to operate on Council property (including Council approved Works Zones) will attain a Permit to Stand Plant on each occasion (Note: oversized vehicles are vehicles longer than 7.5m or heavier than 4.5T.)</p> <p>o) Show the location of any proposed excavation and estimated volumes.</p> <p>p) When demolition, excavation and construction works are to be undertaken on school days, all vehicular movements associated with this work must only be undertaken between the hours of 9.30am and 2.30pm, in order to minimise disruption to the traffic network during school pick up and drop off times.</p> <p>q) Show the location of all Tree Protection (Exclusion) zones (Note: storage of building materials or access through Reserve will not be permitted without prior approval by Council).</p> <p>Notes:</p> <ul style="list-style-type: none"> • A minimum of eight weeks will be required for assessment. Site work must not commence until the Construction Management Plan is approved. • Failure to comply with this condition may result in fines and proceedings to stop work. • Council and NSW Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Eastern Suburbs Police Area Command. • If you partial or full close a road without compliance with Council and NSW Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution. • Traffic Supervisors at the Eastern Suburbs Police Area Command can be contacted on eastsubtraffic@police.nsw.gov <p>Condition Reason: To facilitate the efficient operation of construction projects, minimise traffic disruption, and protect the public, and the surrounding environment, during site works and construction.</p>
--	---

REMEDIATION WORK

C. ON COMPLETION OF REMEDIATION WORK

Nil.

BUILDING WORK

D. BEFORE ISSUE OF A CONSTRUCTION CERTIFICATE

D. 1.	Modification of Details of the Development (section 4.17(1)(g) of the Act
	Before the issue of any construction certificate, the approved plans and the construction certificate plans and specification, required to be submitted to the Principal Certifier under clause 7 of the Development Certification and Fire Safety Regulations, must detail the following amendments:

- a) The profile of the new metal roofing has not been specified. Any new metal roofing is to be of a traditional corrugated profile similar to Colorbond Custom Orb in a light to mid grey colour in order to comply with:
- Woollahra DCP 2015, Chapter C1, Clause 1.4.4, Objective O3, Control C8
 - Woollahra DCP 2015, Chapter C1, Clause 1.5.8, Objective O2, Controls C4, C5, Table 8

Details in accordance with this condition are to be submitted and approved by Council prior to the issue of a Construction Certificate

- b) The removal of the existing chimney breasts within the ground floor level of the principal building form is not supported as they are original. The chimney breasts are to be retained.
- Woollahra DCP 2015, Chapter C1, Clause 1.4.1, Objective O11, Control C7

Details in accordance with this condition are to be submitted and approved by Council prior to the issue of a Construction Certificate

Notes:

- Clause 20 of the Development Certification and Fire Safety Regulations prohibits **the** issue of any construction certificate subject to this condition unless the Principal Certifier is satisfied that the condition has been complied with.
- Clause 19 of the Development Certification and Fire Safety Regulations prohibits the issue of any construction certificate that is inconsistent with this consent.

Condition Reason: To require design changes and/or further information to be provided to address specific issues identified during the assessment under section 4.15 of the Act.

D. 2. Payment of Long Service Levy

Before the issue of any construction certificate, the original receipt(s) for the payment of all of the following levy and contributions must be provided to the Principal Certifier:

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under <i>Building and Construction Industry Long Service Payments Act 1986</i>			
Long Service Levy www.longservice.nsw.gov.au/bci/levy/other-information/levy-calculator	Contact LSL Corporation or use online calculator	No	

Building and Construction Industry Long Service Payment

The long service levy under section 34 of the Building and Construction Industry Long Service Payment Act 1986, must be paid and proof of payment provided to the Principal Certifier prior to the issue of any construction certificate. The levy can be paid directly to the Long Service Corporation or to Council. Further information can be obtained from the Long Service Corporation website www.longservice.nsw.gov.au or the Long Service Corporation on 131 441.

How must the payments be made?

Payments must be made by:

- cash deposit with Council,
- credit card payment with Council, or
- bank cheque made payable to Woollahra Municipal Council.

	<p>How will the section 7.12 levy (formerly known as 94A levy) be indexed? To ensure that the value of the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 2.12 of the Woollahra Section 7.12 Development Contributions Plan 2022 sets out the formula and index to be used in adjusting the levy.</p> <p>Do you need HELP indexing the levy? Please contact Council’s Customer Service Team on 9391 7000. Failure to correctly calculate the adjusted development levy will delay the issue of any certificate issued under section 6.4 of the Act and could void any such certificate (e.g. construction certificate, subdivision certificate, or occupation certificate).</p> <p>Deferred or periodic payment of section 7.12 levy (formerly known as 94A levy) under the Woollahra Section 7.12 Development Contributions Plan 2022 Where the Applicant makes a written request supported by reasons for payment of the section 7.12 levy other than as required by clause 2.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:</p> <ul style="list-style-type: none"> • the reasons given, • whether any prejudice will be caused to the community deriving benefit from the public facilities, • whether any prejudice will be caused to the efficacy and operation of the Plan, and • whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected. <p>Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:</p> <ul style="list-style-type: none"> • the guarantee is by an Australian bank for the amount of the total outstanding contribution, • the bank unconditionally and irrevocably agrees to pay the guaranteed sum to the Council on written request by Council prior to the issue of an occupation certificate, • a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable, • the bank agrees to pay the guaranteed sum without recourse to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent, and • the bank’s obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required. <p>Any deferred or periodic payment of the section 7.12 levy will be adjusted in accordance with clause 2.12 of the Plan. The Applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.</p>
	<p>Condition Reason: To ensure any relevant levy and contributions are paid.</p>
<p>D. 3.</p>	<p>Erosion and Sediment Control Plan – Submission and Approval</p> <p>Before the issue of any construction certificate, an erosion and sediment control plan, prepared by a suitably qualified person in accordance with the following documents, must be submitted to the Principal Certifier. The erosion and sediment control plan must comply with:</p>

	<p>a) “Do it Right On Site, Soil and Water Management for the Construction Industry” and the accompanying factsheets published by the Southern Sydney Regional Organisation of Councils; and</p> <p>b) “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book).</p> <p>Where there is any conflict The Blue Book takes precedence.</p> <p>The Principal Certifier must be satisfied that the erosion and sediment control plan complies with the publications above prior to issuing any construction certificate.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The International Erosion Control Association – Australasia www.austieca.com.au lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans. • The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au, and The Blue Book is available at www.environment.nsw.gov.au • Under clause 73(2)(a)(v) of the Development Certification and Fire Safety Regulation an Accredited Certifier may be satisfied as to this matter. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>D. 4.</p>	<p>Structural Adequacy of Existing Supporting Structures</p> <p>Before the issue of any construction certificate, a certificate from a professional structural engineer, certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be provided to the Principal Certifier and submitted with the construction certificate application.</p> <p>Condition Reason: To ensure that the existing structure is able to support the additional loads proposed.</p>
<p>D. 5.</p>	<p>Professional Engineering Details</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications, required under clause 7 of the Development Certification and Fire Safety Regulation, must include detailed professional engineering plans and/or specifications for all structural, electrical, hydraulic, hydrogeological, geotechnical, mechanical and civil work complying with this consent, approved plans, and supporting documentation.</p> <p>Detailed professional engineering plans and/or specifications must be submitted to the Principal Certifier with the application for any construction certificate.</p> <p>Notes:</p> <ul style="list-style-type: none"> • This does not affect the right of the developer to seek staged construction certificates. <p>Condition Reason: To ensure professional engineering details and technical specifications are provided.</p>

D. 6.	<p>Stormwater Discharge to Existing Stormwater Drainage System</p> <p>Before the issue of any construction certificate, the applicant must submit, for approval by the Principal Certifier, detailed stormwater management plans prepared by a chartered professional civil engineer, which include the following:</p> <ol style="list-style-type: none"> a) The stormwater management plans must specify any components of the existing drainage system to be retained and certified to be in good condition and of adequate capacity to convey additional runoff and be replaced or upgraded if required. b) Detail the location of the existing stormwater drainage system including all pipes, inspection openings, surface drains, pits and their discharge location as well as any new stormwater drainage system. c) Detail any remedial works required to upgrade the existing stormwater drainage system. d) Internal stormwater drainage pipes and pits are to be designed for rainfall intensities up to and including the 1% AEP event if an unimpeded overland flow path to the street drainage system is not available. Design details and calculations must be included in the stormwater management plans. e) The discharge of stormwater from the site to the street kerb located within the frontage of the site. Only one stormwater outlet with a maximum discharge rate of 20 l/s in the 1% AEP storm event will be permitted. Full supporting calculations must be included in the stormwater management plans. The stormwater outlet pipe across the Council's property must have a minimum grade of 1% to comply with Council's DCP and AS3500.3. f) All below ground structures are to be fully tanked or appropriately designed such that subsoil drainage/seepage water is NOT discharged to the kerb and gutter to comply with Chapter E2.2.5 of Council's DCP. Notation to this requirement must be clearly depicted on the drawings. g) Dimensions of all drainage pit and access grates must comply with AS3500.3 and Council's DCP. h) Interceptor drain(s) at the site boundary to prevent stormwater flows from the site crossing the footpath; and General compliance with the Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management. i) General compliance with the Woollahra DCP 2015 Chapter E2 – Stormwater and Flood Risk Management. <p>The Stormwater Management Plan must also include the following specific requirements:</p> <p>Layout plan</p> <p>A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Australian Government publication, Australian Rainfall and Run-off, 2019 edition or most current version thereof. It must include:</p> <ol style="list-style-type: none"> a) All pipe layouts, dimensions, grades, lengths and material specification. b) Location and dimensions of all downpipes. c) All invert levels reduced to Australian Height Datum (AHD). d) Location and dimensions of all drainage pits. e) Point and method of connection to Councils drainage infrastructure. f) Overland flow paths over impervious areas. <p>Where new Stormwater Drainage System crosses the footpath area within any road, separate approval under section 138 of the Roads Act 1993 must be obtained from Council for those works before the issue of any construction certificate.</p>
--------------	--

	<p>All Stormwater Drainage System work within any road or public place must comply with Woollahra Municipal Council's Specification for Roadworks, Drainage and Miscellaneous Works (2012).</p> <p>Notes:</p> <ul style="list-style-type: none"> The collection, storage and use of rainwater is to be in accordance with Standards Australia HB230 "Rainwater Tank Design and Installation Handbook". <p>Condition Reason: To ensure that site stormwater is disposed of in a controlled and sustainable manner.</p>
<p>D. 7.</p>	<p>Flood Protection</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications required under clause 7 of the Development Certification and Fire Safety Regulation, must include a Flood Risk Management Plan on the basis of the Flood Planning Level (FPL).</p> <p><u>Flood Warning:</u></p> <p>a) A permanent flood risk management plan shall be installed in an area frequented by the occupants such as the Kitchen,</p> <p><u>Flood Proof Material</u></p> <p>a) Flood compatible materials shall be used for all flood exposed construction,</p> <p><u>Electricals</u></p> <p>a) All flood exposed electrical wiring and equipment shall be waterproofed, Flood protection is to comply with Woollahra DCP 2015, Part E General Controls for All Development, Chapter E2 –Stormwater and Flood Risk Management.</p> <p>Notes:</p> <ul style="list-style-type: none"> The revised driveway profile, gradients and transitions must be in accordance with Australian Standard 2890.1, Part 1: Off-street car parking. The driveway profile submitted to Council must contain all relevant details: reduced levels, proposed grades and distances. Council will not allow alteration to existing reduced levels within the road or any other public place to achieve flood protection. <p>Condition Reason: To ensure the development incorporates flood inundation protection measures.</p>
<p>D. 8.</p>	<p>Waste Storage – Commercial</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications required by clause 7 of the Development Certification and Fire Safety Regulation, must make provision for:</p> <p>a) A dedicated and enclosed waste and recycling storage area behind the building line or within non-habitable areas of the building.</p> <p>Condition Reason: To ensure a waste and recycling storage area is provided.</p>

D. 9.	<p>Light and Ventilation</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications required under clause 7 of the Development Certification and Fire Safety Regulation, must detail all lighting, mechanical ventilation or air-conditioning systems complying with Part F.4 of the BCA or clause 3.8.4 and 3.8.5 of the BCA Housing Provisions, inclusive of AS 1668.1, AS 1668.2 and AS/NZS 3666.1.</p> <p>If an alternate solution is proposed then the construction certificate application must include a statement as to how the performance requirements of the BCA are to be complied with and support the performance based solution by expert evidence of suitability.</p> <p>This condition does not set aside the mandatory requirements for 'Legionella Control' under the Public Health Act 2010 and Public Health Regulation 2022 in relation to regulated systems. This condition does not set aside the effect of the Protection of the Environment Operations Act 1997 in relation to offensive noise or odour.</p> <p>Notes:</p> <ul style="list-style-type: none">• Clause 69 of the Regulation requires compliance with the BCA. Clause 19 of the Development Certification and Fire Safety Regulation prevents the issue of a construction certificate unless the Principal Certifier is satisfied that compliance has been achieved.• Part 3, Division 1 of the Development Certification and Fire Safety Regulation details what information must be submitted with any construction certificate. It is the Applicant's responsibility to demonstrate compliance through the construction certificate application process.• Applicants must also consider possible noise and odour nuisances that may arise. The provisions of the Protection of the Environment Operations Act 1997 have overriding effect if offensive noise or odour arises from the use.• Applicants must pay attention to the location of air intakes and air exhausts relative to sources of potentially contaminated air and neighbouring windows and air intakes respectively, see section 2 and 3 of AS 1668.2. <p>Condition Reason: To ensure the development is provided with adequate light and ventilation.</p>
D. 10.	<p>Acoustic Certification of Mechanical Plant and Equipment</p> <p>Before the issue of any construction certificate, the construction certificate plans and specifications required under clause 7 of the Development Certification and Fire Safety Regulation, must be accompanied by a certificate from a professional acoustic engineer certifying that the noise level measured at any boundary of the site at any time while the proposed mechanical plant and equipment is operating will not exceed the background noise level. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed background noise level, at any time.</p> <p>The background noise level is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the LA90, 15 minute level measured by a sound level meter.</p> <p>Where sound attenuation is required this must be detailed.</p>

	<p>Notes:</p> <ul style="list-style-type: none"> • Further information including lists of Acoustic Engineers can be obtained from: <ul style="list-style-type: none"> - Australian Acoustical Society - professional society of noise-related professional www.acoustics.asn.au - Association of Australian Acoustical Consultant - professional society of noise related professionals www.aaac.org.au <p>Condition Reason: To ensure the development does not result in any unreasonable acoustic impacts.</p>
<p>D. 11.</p>	<p>Food Premises – Construction Certificate Plans and Specifications</p> <p>Before the issue of any construction certificate, the person with the benefit of this consent must submit to Council details for the construction and fit out of the food premises. Such details must demonstrate compliance with the Food Act 2003, Food Regulation 2015, and the Food Standards Code as published by Food Standards Australia and New Zealand and Australian Standard AS 4674: Construction and fit out of food premises.</p> <p>No construction certificate relating to the construction or fitout of food premises must be issued until Council’s Environmental Health Officer has advised in writing that the plans and specification are considered satisfactory.</p> <p>The details for the construction and fit out of food premises, as considered satisfactory by Council’s Environmental Health Officer must form part of any construction certificate.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The assessment of food premises fitout plans and specifications is subject to an adopted fee. The construction and fitout of food premises is not listed under clause 73 of the Development Certification and Fire Safety Regulation as a matter that a Principal Certifier may be satisfied as to. Hence, the detailed plans and specifications must be referred to Council and be to Council’s satisfaction prior to the issue of any construction certificate for such works. <p>Condition Reason: To ensure that the food premises fitout plans and specifications are assessed and approved by Council.</p>
<p>D. 12.</p>	<p>Noise Control - Hydraulic Noise Control-Sound Insulation Rating of Services</p> <p>Before the issue of any construction certificate, the requirements of the Building Code of Australia BCA Clause F5.6: Ducts, Hot and Cold Domestic Water, Stormwater, Soil and Waste Pipes, which serves or passes through more than one sole occupancy unit must be separated from habitable rooms (other than a kitchen) in any other sole occupancy unit by a weighted sound reduction index + traffic noise spectrum adaptation term of not less than 40 if it is adjacent to a habitable room, and 25 if it is adjacent to a wet area (bathroom, laundry etc.) or kitchen.</p> <p>Details are to be provided by the applicant clearly indicating how this requirement will be achieved in respect to controlling hydraulic noise emission to adjoining habitable rooms.</p> <p>Condition Reason: To ensure the development does not result in any unreasonable acoustic impacts.</p>

<p>D. 13.</p>	<p>Noise Control - Acoustic Protection of adjoining residential units-Operation of Air Conditioning Plant</p> <p>Before the issue of any construction certificate, the applicant must ensure that the operation of the proposed Air Condition System and associated plant does not create interior noise intrusion and vibration to occur within any adjoining residential unit.</p> <p>Condition Reason: To ensure the development does not result in any unreasonable acoustic impacts.</p>
<p>D. 14.</p>	<p>Ventilation - Kitchen Exhaust- Smoke & Odour Control</p> <p>Before the issue of any construction certificate:</p> <ul style="list-style-type: none"> a) As the discharge of air from the kitchen exhaust ventilation system(s) is considered an obnoxious discharge under Section 3.7 of Australian Standard 1668.2-1991, the ductwork serving the proposed kitchen exhaust system(s) shall be arranged vertically with a discharge velocity of not less than 5 m/s and be situated at least 1 m above the ridge of a pitched roof or 3 m above the flat of the building. b) All exhaust air and spill air shall be discharged to atmosphere in such a manner as not to cause a danger or nuisance to occupants in the building, occupants of neighbouring buildings or members of the public. c) The design, construction and installation of the kitchen exhaust hood(s) shall comply with the requirements of Appendix E, 'Kitchen Exhaust Hoods' of AS 1668.2-1991 and Appendix F, 'Capture of Emissions By Kitchen Exhaust Hoods' of AS 1668.2-1991. d) A Smoke & Odour Impact Assessment Report is to be prepared by a suitably qualified engineer detailing the design specification of the proposed kitchen exhaust system, including all smoke and odour inhibiting controls and filtering systems. e) The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail all the kitchen exhaust ventilation system(s), including all smoke and odour controls and filtering systems. Upon completion and prior to occupation of the premises, the kitchen exhaust ventilation system(s) shall be certified by a qualified engineer that the system(s) has been installed in accordance with AS 1668.1 and AS 1668.2 and the design specification as detailed in the Smoke & Odour Impact Assessment Report. <p>Condition Reason: To ensure the development does not result in any unreasonable exhaust, smoke or odour impacts.</p>
<p>D. 15.</p>	<p>Ventilation - Internal Sanitary Rooms</p> <p>Before the issue of any construction certificate, all internal sanitary rooms and laundry facilities not provided with natural ventilation must be provided with a system of mechanical exhaust ventilation in accordance with <i>Table B1 Minimum Exhaust Ventilation Flow Rates of AS 1668.2-1991</i>.</p> <p>Details of any proposed mechanical ventilation system(s) must be submitted with the Construction Certificate plans and specifications to the Certifying Authority demonstrating compliance with AS 1668 Parts 1 & 2.</p> <p>Condition Reason: To ensure the development is adequately ventilated.</p>

<p>D. 16.</p>	<p>Building Upgrade (clause 64 of the Regulation)</p> <p>Before the issue of any construction certificate, the construction certificate plans and specification required to be submitted to the Principal Certifier, under clause 7 of the Development Certification and Fire Safety Regulation, must ensure the existing building is brought into total or partial conformity with the BCA, by detailing all building upgrade works required by this condition.</p> <p>The Principal Certifier must be satisfied that such work, to be implemented as part of the development, will upgrade the building to bring it into compliance with the following provisions of the BCA as in force at the date of the construction certificate application:</p> <p>a) upgrade work required by Building Upgrade Strategy Report, referenced 23117.2-USR, prepared by Nest Consulting Group, dated 18 August 2023</p> <p>Notes:</p> <ul style="list-style-type: none"> • The measures contained in the building are inadequate: <ul style="list-style-type: none"> a) to protect persons using the building, and to facilitate their egress from the building, in the event of fire, and/or b) to restrict the spread of fire from the building to other buildings nearby. • The Principal Certifier issuing the construction certificate has no power to remove the requirement to upgrade the existing building as required by this condition. Where this conditions specifies compliance with performance requirements of the BCA the Principal Certifier, subject to their level of accreditation, may be satisfied as to such matters. Where this condition specifies compliance with prescriptive (Deemed-to-Satisfy) provisions of the BCA these prescriptive requirements must be satisfied and cannot be varied unless this condition is reviewed Part 8 Division 8.2 or amended under section 4.55 of the Act. • This condition does not set aside the Principal Certifier’s responsibility to ensure compliance with clause 14 of the Development Certification and Fire Safety Regulation in relation to Fire Protection and Structural Adequacy. <p>Condition Reason: To ensure that, in accordance with clause 64 of the Regulation, that the existing building be upgraded to total or partial conformity with the BCA.</p>
<p>D. 17.</p>	<p>Payment of S7.12 Contributions Levy</p> <p>A payment of a levy authorised by section 7.12 of the Environmental Planning and Assessment Act 1979 must be paid prior to the issue of any Construction Certificate or Subdivision Works Certificate. The Principal Certifier is to be provided with the original receipt for payment under the Woollahra Section 7.12 Development Contributions Plan 2022.</p> <p>A cost estimate report, no more than 3 months old, demonstrating the proposed cost of carrying out the development must be completed and submitted to Council for determination of the costs of work. This report must incorporate all approved modification applications.</p> <p>The costs and expenses of the proposed cost of development must be established in accordance with clause 208 of the Environmental Planning and Assessment Regulation 2021.</p> <p>The cost estimate report must be in the form of:</p> <ul style="list-style-type: none"> • A cost summary report, prepared by the applicant or a suitably qualified person for a development up to \$749,999; or • A quantity surveyor’s report, for development over \$750,000.

The applicable levy rate is to be calculated using the summary schedule below.

Summary Schedule	
Development Cost	Levy Rate
• Up to and including \$100,000	Nil
• More than \$100,000 and up to and including \$200,000	0.5% of the cost
• More than \$200,000	1% of the cost

How must the payments be made?

Payments must be made by:

- Cash deposit with Council,
- Credit card payment with Council, or
- Bank cheque made payable to Woollahra Municipal Council.

Deferred or periodic payment of section 7.12 levy

Where the Applicant makes a written request supported by reasons for payment of the section 7.12 levy other than as required by clause 2.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- the reasons given,
- whether any prejudice will be caused to the community deriving benefit from the public facilities,
- whether any prejudice will be caused to the efficacy and operation of the Plan, and
- whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- the guarantee is by an Australian bank for the amount of the total outstanding contribution,
- the bank unconditionally and irrevocably agrees to pay the guaranteed sum to the Council on written request by Council prior to the issue of an occupation certificate,
- a time limited bank guarantee or a bank guarantee with an expiry date is not acceptable,
- the bank agrees to pay the guaranteed sum without recourse to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent, and
- the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or periodic payment of the section 7.12 levy will be adjusted in accordance with clause 2.12 of the Plan. The Applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Do you need HELP indexing the levy?

Please contact Council's Customer Service Team on 02 9391 7000. Failure to correctly calculate the adjusted development levy will delay the issue of any certificate issued under section 6.4 of the Act and could void any such certificate (e.g. construction certificate, subdivision certificate, or occupation certificate).

Condition Reason: To ensure any relevant contributions are paid.

E. BEFORE BUILDING WORK COMMENCES

<p>E. 1.</p>	<p>Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989</p> <p>Before any building work commences, and under section 4.17(11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:</p> <ol style="list-style-type: none"> a) that the work must be carried out in accordance with the requirements of the Building Code of Australia, b) in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences. <p>This condition does not apply:</p> <ol style="list-style-type: none"> a) to the extent to which an exemption is in force under the Home Building Regulation 2014, or b) to the erection of a temporary building. <p>In this condition, a reference to the BCA is a reference to that code as in force on the date the application for the relevant Construction Certificate is made.</p> <p>Notes:</p> <ul style="list-style-type: none"> • This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia. • All new guttering is to comply with the provisions of AS3500. <p>Condition Reason: To ensure that works are carried out in accordance with the Building Code of Australia and any required contract of insurance is in force.</p>
<p>E. 2.</p>	<p>Erosion and Sediment Controls – Installation</p> <p>Before any building work commences, water pollution, erosion and sedimentation controls must be installed and maintained in accordance with:</p> <ol style="list-style-type: none"> a) The Soil and Water Management Plan if required under this consent; b) “Do it Right On Site, Soil and Water Management for the Construction Industry” and accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and c) “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book). <p>Where there is any conflict The Blue Book takes precedence.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The International Erosion Control Association – Australasia (www.austieca.com.au/) lists consultant experts who can assist in ensuring compliance with this condition. • Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia. • The “Do it Right On Site, Soil and Water Management for the Construction Industry” publication and the accompanying factsheets can be downloaded from www.woollahra.nsw.gov.au and The Blue Book is available at www.environment.nsw.gov.au

	<ul style="list-style-type: none"> • A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution. • Section 257 of the Protection of the Environment Operations Act 1997 provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. • Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of their occupation of the land being.
	<p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>E. 3.</p>	<p>Building - Construction Certificate, Appointment of Principal Certifier, Appointment of Principal Contractor and Notice of Commencement (Part 6, Division 6.3 of the Act)</p> <p>Building work must not commence, until:</p> <ol style="list-style-type: none"> a) A construction certificate for the building work has been issued by the consent authority, the Council (if the Council is not the consent authority) or an accredited Certifier, and b) The person having the benefit of the development consent has: <ul style="list-style-type: none"> • appointed a Principal Certifier for the building work, and • notified the Principal Certifier that the person will carry out the building work as an Owner-builder, if that is the case, and c) The Principal Certifier has, no later than 2 days before the building work commences: <ul style="list-style-type: none"> • notified the consent authority and the Council (if the Council is not the consent authority) of his or her appointment, and • notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and d) The person having the benefit of the development consent, if not carrying out the work as an Owner-builder, has: <ul style="list-style-type: none"> • appointed a Principal Contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and • notified the Principal Certifier of any such appointment, and • unless that person is the Principal Contractor, notified the Principal Contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and • given at least 2 days’ notice to the Council of the person’s intention to commence the erection of the building. <p>Notes:</p> <ul style="list-style-type: none"> • Building has the same meaning as in section 1.4 of the Act and includes part of a building and any structure or part of a structure. • New building has the same meaning as in section 6.1 of the Act and includes an altered portion of, or an extension to, an existing building. • The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 6.6(2) of the Act (including the need for a Construction Certificate) prior to any demolition work. See: <i>Over our Dead Body Society Inc v Byron Bay Community Association Inc</i> [2001] NSWLEC 125. • Construction Certificate Application, PC Service Agreement and Notice of Commencement forms can be downloaded from Council’s website www.woollahra.nsw.gov.au • It is an offence for any person to carry out the erection of a building in breach of this condition and in breach of section 6.6(2) of the Act.

	<ul style="list-style-type: none"> Under the Home Building Act 1989 any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from NSW Fair Trading.
	<p>Condition Reason: To ensure a construction certificate has been issued, a Principal Certifier is appointed, a Principal Contractor (if applicable) is appointed, and a notice of commencement has been submitted.</p>

F. DURING BUILDING WORK

F. 1.	<p>Compliance with BCA and Insurance Requirements under the Home Building Act 1989</p> <p>While site work is being carried out:</p> <ul style="list-style-type: none"> a) work must be carried out in accordance with the requirements of the Building Code of Australia (BCA), b) in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences. <p>This condition does not apply:</p> <ul style="list-style-type: none"> a) to the extent to which an exemption is in force under the Development Certification and Fire Safety Regulations, or b) to the erection of a temporary building. <p>In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.</p> <p>For the purposes of section 4.17(11) of the Act, the above condition is prescribed in relation to a development consent for development that involves any building work.</p> <p>Notes:</p> <ul style="list-style-type: none"> All new guttering is to comply with the provisions of AS 3500. <p>Condition Reason: To ensure compliance with the BCA and Home building Act 1989.</p>
F. 2.	<p>Requirement to Notify about New Evidence</p> <p>While site work is being carried out, any new information that comes to light, which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifier.</p> <p>Condition Reason: To ensure Council and the Principal Certifier are made aware of new information.</p>
F. 3.	<p>Critical Stage Inspections</p> <p>While site work is being carried out, critical stage inspections must be called for by the Principal Contractor or Owner-builder as required by the Principal Certifier, any PC service agreement, the Act, the Development Certification and Fire Safety Regulation, and the Regulation.</p>

	<p>Work must not proceed beyond each critical stage until the Principal Certifier is satisfied that work is proceeding in accordance with this consent, the construction certificate(s) and the Act.</p> <p>Critical stage inspections means the inspections prescribed by the Development Certification and Fire Safety Regulations, and Regulations for the purposes of section 6.5 of the Act or as required by the Principal Certifier and any PC Service Agreement.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The Principal Certifier may require inspections beyond mandatory critical stage inspections in order that the Principal Certifier be satisfied that work is proceeding in accordance with this consent. • The Principal Certifier may, in addition to inspections, require the submission of Compliance Certificates, survey reports or evidence of suitability in accordance with Part A2G2 of the BCA in relation to any matter relevant to the development. <p>Condition Reason: To ensure that building work progresses in accordance with the approved plans, conditions of consent, and requirements of the act.</p>
<p>F. 4.</p>	<p>Hours of Work –Amenity of the Neighbourhood</p> <p>While site work is being carried out:</p> <ol style="list-style-type: none"> a) No work must take place on any Sunday or public holiday. b) No work must take place before 7am or after 5pm any weekday. c) No work must take place before 7am or after 1pm any Saturday. d) The following work must not take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday: <ol style="list-style-type: none"> i. piling, ii. piling, iii. rock or concrete cutting, boring or drilling, iv. rock breaking, v. rock sawing, vi. jack hammering, or vii. machine excavation. e) No loading or unloading of material or equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday. f) No operation of any equipment associated with the activities listed in part d) above must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday or at any time on a Sunday or public holiday. g) No rock excavation being cutting, boring, drilling, breaking, sawing , jack hammering or bulk excavation of rock, must occur without a 15 minute interval break within every hour. <p>Notes:</p> <ul style="list-style-type: none"> • The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council. • Each and every breach of this condition by any person may be subject to a separate penalty infringement notice or prosecution.

	<ul style="list-style-type: none"> • The delivery and removal of plant, equipment and machinery associated with wide loads subject to Transport for NSW and NSW Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis. • Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the Protection of the Environment Operations Act 1997, the Protection of the Environment Operations (Noise Control) Regulation 2017. • NSW EPA Noise Guide is available at www.epa.nsw.gov.au/noise/nglg.htm
	<p>Condition Reason: To mitigate the impact of work upon the amenity of the neighbourhood.</p>

<p>F. 5.</p>	<p>Public Footpaths – Safety, Access and Maintenance</p> <p>While site work is being carried out, any person acting with the benefit of this consent must:</p> <ol style="list-style-type: none"> a) Not erect or maintain any gate or fence that swings out, or encroaches upon the road or the footway. b) Not use the road or footway for the storage of any article, material, matter, waste or thing. c) Not use the road or footway for any work. d) Keep the road and footway in good repair free of any trip hazard or obstruction. e) Any damage caused to the road, footway, vehicular crossing, nature strip or any public place must be immediately made safe and then repaired, to the satisfaction of Council. f) Not stand any plant and equipment upon the road or footway. g) If it is proposed to locate any site fencing, hoardings, skip bins or other articles upon any part of the footpath, nature strip or any public place, or operate a crane, hoist or concrete pump on or over Council land, an application must be submitted to and approved by Council beforehand. h) Provide a clear safe pedestrian route a minimum of 1.5m wide. i) Protect heritage listed street name inlays located in the footpath, kerb and gutter, and any other structure, to ensure they are not removed or damaged during development. <p>This condition does not apply to the extent that a permit or approval exists under the section 148B of the Road Transport Act 2013, section 138 of the Roads Act 1993 or section 68 of the Local Government Act 1993 except that at all time compliance is required with:</p> <ol style="list-style-type: none"> a) Australian Standard AS 1742 (Set): Manual of uniform traffic control devices and all relevant parts of this set of standards. b) Australian Road Rules. <p>Notes:</p> <ul style="list-style-type: none"> • Section 148B of the Road Transport Act 2013 allows the NSW Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. • Section 138 of the Roads Act 1993 provides that a person must not: <ul style="list-style-type: none"> - erect a structure or carry out a work in, on or over a public road, or - dig up or disturb the surface of a public road, or - remove or interfere with a structure, work or tree on a public road, or - pump water into a public road from any land adjoining the road, or - connect a road (whether public or private) to a classified road, - otherwise than with the consent of the appropriate roads authority.
---------------------	--

	<ul style="list-style-type: none"> • Section 68 of the Local Government Act 1993 provides that a person may carry out certain activities only with the prior approval of the Council including: <ul style="list-style-type: none"> - Part C Management of waste: <ul style="list-style-type: none"> a) For fee or reward, transport waste over or under a public place b) Place waste in a public place c) Place a waste storage container in a public place. - Part E Public roads: <ul style="list-style-type: none"> a) Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway b) Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.
	<p>Condition Reason: To ensure safe access is maintained to footpaths and roads during building works.</p>
<p>F. 6.</p>	<p>Maintenance of Environmental Controls</p> <p>While site work is being carried out, the following monitoring, measures and controls must be maintained:</p> <ul style="list-style-type: none"> a) erosion and sediment controls, b) dust controls, c) dewatering discharges, d) noise controls, e) vibration monitoring and controls, and f) ablutions. <p>Condition Reason: To ensure that environmental controls are maintained during building works to protect the public and surrounding environment.</p>
<p>F. 7.</p>	<p>Support of Adjoining Land and Buildings</p> <p>While site work is being carried out, a person must not to do anything on or in relation to the site (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).</p> <p>For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.</p> <p>Notes:</p> <ul style="list-style-type: none"> • This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the Principal Contractor or Owner-builder must obtain: <ul style="list-style-type: none"> - the consent of the owners of such adjoining or supported land to trespass or encroach, or - an access order under the Access to Neighbouring Land Act 2000, or - an easement under section 88K of the Conveyancing Act 1919, or - an easement under section 40 of the Land and Environment Court Act 1979 as appropriate. • Section 177 of the Conveyancing Act 1919 creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land). • Clause 17 of the Roads Regulation 2018 prohibits excavation in the vicinity of roads as follows: “Excavations adjacent to road - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.”

	<p>Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.</p> <ul style="list-style-type: none"> The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, Crown land under Council's care control or management, or any community or operational land as defined by the Local Government Act 1993. <p>Condition Reason: To ensure that the support of adjoining land is not removed.</p>
<p>F. 8.</p>	<p>Erosion and Sediment Controls – Maintenance</p> <p>While site work is being carried out, water pollution, erosion, and sedimentation controls must be maintained in accordance with:</p> <ol style="list-style-type: none"> the Soil and Water Management Plan required under this consent, “Do it Right On Site, Soil and Water Management for the Construction Industry” and the accompanying factsheets published by the Southern Sydney Regional Organisation of Councils, and “Managing Urban Stormwater - Soils and Construction” 2004 published by the NSW Government (The Blue Book). <p>Where there is any conflict The Blue Book takes precedence.</p> <p>Notes:</p> <ul style="list-style-type: none"> A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution. Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. Warning: Irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution. <p>Condition Reason: To prevent potential water pollution and dust nuisance.</p>
<p>F. 9.</p>	<p>Disposal of Site Water During Construction</p> <p>While site work is being carried out:</p> <ol style="list-style-type: none"> Prior to pumping any water into the road or public stormwater system, approval must be obtained from Council under section 138(1)(d) of the Roads Act 1993. Water pollution, as defined by the Protection of the Environment Operations Act 1997, must not occur as the result of the discharge to the road, public stormwater system or other place of any site water. That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas. <p>Condition Reason: To ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not cause erosion and water pollution.</p>

<p>F. 10.</p>	<p>Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum</p>
	<p>While site work is being carried out, a registered surveyor must carry out check surveys and provide survey certificates confirming the location of the building(s), ancillary works, flood protection works and the stormwater drainage system relative to the boundaries of the site and that the height of buildings, ancillary works, flood protection works and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.</p> <p>Work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the Principal Certifier's satisfaction:</p> <ol style="list-style-type: none"> a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level. b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey. c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof. d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structure, flood protection work, swimming pool or spa pool or the like. e) Upon the completion of formwork and steel fixing prior to pouring of any concrete for driveways showing transitions and crest thresholds confirming that driveway levels match Council approved driveway crossing levels and minimum flood levels. f) Stormwater drainage Systems are in place prior to back filling over pipes confirming location, height and capacity of works. g) Flood protection measures are in place confirming location, height and capacity.
	<p>Condition Reason: To ensure that development occurs in the location and at the height approved under this consent, which is critical to ensure that buildings are constructed to minimum heights for flood protection and maximum heights to protect views and the amenity of neighbours.</p>
<p>F. 11.</p>	<p>Placement and Use of Skip Bins</p>
	<p>While site work is being carried out, all waste storage containers, including but not limited to skip bins, must be stored within the site unless:</p> <ol style="list-style-type: none"> a) Activity Approval has been issued by Council under section 68 of the Local Government Act 1993 to place the waste storage container in a public place; and b) where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules. <p>Notes:</p> <ul style="list-style-type: none"> • Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.
	<p>Condition Reason: To ensure waste storage containers are appropriately located.</p>

<p>F. 12.</p>	<p>Prohibition of Burning</p> <p>While site work is being carried out, there must be no burning of any waste or other materials. The burning of copper chrome arsenate (CCA) or pentachlorophenol (PCP) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Under the Protection of the Environment Operations (Clean Air) Regulation 2021 all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning. <p>Condition Reason: To ensure no burning of waste occurs.</p>
<p>F. 13.</p>	<p>Dust Mitigation</p> <p>While site work is being carried out, dust mitigation must be implemented in accordance with “Dust Control - Do it right on site” and the accompanying facts sheets published by the Southern Sydney Regional Organisation of Councils.</p> <p>This generally requires:</p> <ol style="list-style-type: none"> Dust screens to all hoardings and site fences. All stockpiles or loose materials to be covered when not being used. All equipment, where capable, being fitted with dust catchers. All loose materials being placed bags before placing into waste or skip bins. All waste and skip bins being kept covered when not being filled or emptied. The surface of excavation work being kept wet to minimise dust. Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust. <p>Notes:</p> <ul style="list-style-type: none"> • “Dust Control - Do it right on site” and the accompanying factsheets can be downloaded from Council’s website www.woollahra.nsw.gov.au • Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.safework.nsw.gov.au and www.epa.nsw.gov.au. Other specific conditions and advice may apply. • Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution. <p>Condition Reason: To mitigate the impact of dust upon the amenity of the neighbourhood and prevent water pollution.</p>
<p>F. 14.</p>	<p>Site Waste Minimisation and Management – Demolition</p> <p>While site work is being carried out, in order to maximise resource recovery and minimise residual waste from demolition activities:</p> <ol style="list-style-type: none"> the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work, an area is to be allocated for the storage of materials for use, recycling and disposal (giving consideration to slope, drainage, location of waterways, stormwater outlets, vegetation and access and handling requirements), separate collection bins and/or areas for the storage of residual waste are to be provided,

	<p>d) the purpose and content of the bins and/or storage areas are to be clearly 'signposted',</p> <p>e) measures to prevent damage by the elements, odour, health risks and windborne litter are to be implemented, and</p> <p>f) site disturbance must be minimised, and unnecessary excavation limited.</p> <p>When implementing the SWMMP the Applicant must ensure:</p> <p>a) footpaths, public reserves and street gutters are not used as places to store demolition waste or materials of any kind without Council approval,</p> <p>b) any material moved offsite is transported in accordance with the requirements of the Protection of the Environment Operations Act 1997,</p> <p>c) waste is only transported to a place that can lawfully be used as a waste facility,</p> <p>d) generation, storage, treatment and disposal of hazardous waste and special waste (including asbestos) is conducted in accordance with relevant waste legislation administered by the NSW Environment Protection Authority, and relevant occupational health and safety legislation administered by SafeWork NSW, and</p> <p>e) evidence such as weighbridge dockets and invoices for waste disposal or recycling services are retained.</p> <p>Notes:</p> <ul style="list-style-type: none"> Materials that have an existing reuse or recycling market must not be disposed of in a land fill. Reuse and recycling opportunities are decreased when asbestos is not carefully removed and segregated from other waste streams. <p>Condition Reason: To maximise resource recovery and minimise residual waste from demolition activities.</p>
<p>F. 15.</p>	<p>Site Waste Minimisation and Management – Construction</p> <p>While site work is being carried out, in order to maximise resource recovery and minimise residual waste from construction activities:</p> <p>a) the provisions of the Site Waste Minimisation and Management Plan (SWMMP) are to be implemented at all times during the course of the work,</p> <p>b) deliveries of materials must be arranged so that materials are delivered 'as needed' to prevent the degradation of materials through weathering and moisture damage,</p> <p>c) consideration must be given to returning excess materials to the supplier or manufacturer,</p> <p>d) an area must be allocated for the storage of materials for use, recycling and disposal (considering slope, drainage, location of waterways, stormwater outlets and vegetation),</p> <p>e) the purpose and content of the storage areas must be clearly 'signposted',</p> <p>f) contractors must be arranged for the transport, processing and disposal of waste and recycling and all contractors must be aware of the legal requirements for disposing of waste,</p> <p>g) separate collection bins or areas for the storage of residual waste must be promoted,</p> <p>h) measures to prevent damage by the elements, odour and health risks, and windborne litter must be implemented,</p> <p>i) site disturbance must be minimised and unnecessary excavation limited,</p> <p>j) all waste must be transported to a place that can lawfully be used as a waste facility, and</p> <p>k) records demonstrating lawful disposal of waste must be retained and kept readily accessible for inspection by regulatory authorities such as Council, the NSW EPA or SafeWork NSW.</p>

	<p>Condition Reason: To maximise resource recovery and minimise residual waste from construction activities.</p>
<p>F. 16.</p>	<p>Shoring and Adequacy of Adjoining Property</p> <p>While site work is being carried out, the person having the benefit of the development consent must, at the person’s own expense:</p> <ol style="list-style-type: none"> a) protect and support the adjoining premises from possible damage from the excavation, and b) where necessary, underpin the adjoining premises to prevent any such damage. <p>For the purposes of section 4.17(11) of the Act, the following condition is prescribed in relation to a development consent for development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land.</p> <p>Notes:</p> <ul style="list-style-type: none"> • This condition does not apply if the person having the benefit of the development consent owns the adjoining land or the owner of the adjoining land has given consent in writing to that condition not applying. <p>Condition Reason: To protect and support the adjoining premises from possible damage from the excavation.</p>
<p>F. 17.</p>	<p>Asbestos Removal</p> <p>While site work is being carried out, all asbestos removal work must be carried out safely according to NSW work health and safety legislation.</p> <p>Where hazardous material, including bonded or friable asbestos has been identified in accordance with the conditions in Section B above, and such material must be demolished, disturbed and subsequently removed, all such works must comply with the following criteria:</p> <ol style="list-style-type: none"> a) Be undertaken by contractors who hold a current SafeWork NSW “demolition licence” and a current SafeWork NSW “Class A licence” for friable asbestos removal. b) Be carried out in accordance with the relevant SafeWork NSW codes of practice. c) No asbestos products may be reused on the site. d) No asbestos laden skip or bins must be left in any public place. <p>Notes:</p> <ul style="list-style-type: none"> • Before starting work, a work site-specific permit approving each asbestos project must be obtained from SafeWork NSW. A permit will not be granted without a current SafeWork licence. • All removal, repair or disturbance of or to asbestos material must comply with: <ul style="list-style-type: none"> - Work Health and Safety Act 2011, - Work Health and Safety Regulation 2017, - SafeWork NSW “Code of Practice: How to Safely Remove Asbestos” (2016), and - SafeWork NSW “Code of Practice: How to Manage and Control Asbestos in the Workplace” (2016). • For more information go to the SafeWork NSW website on asbestos www.safework.nsw.gov.au/health-and-safety/safety-topics-a-z/asbestos, and www.safework.nsw.gov.au/law-and-policy/legislation-and-codes/codes-of-practice or call 131 050 <p>Condition Reason: To ensure the safe removal of asbestos and protect the health and safety of persons working on the site and the public.</p>

<p>F. 18.</p>	<p>Classification of Hazardous Waste</p> <p>While site work is being carried out, and prior to the exportation of hazardous waste (including hazardous fill or soil) from the site, the waste materials must be classified in accordance with the provision of the Protection of the Environment Operations Act 1997 and the NSW EPA Waste Classification Guidelines, Part1: Classifying Waste, 2014.</p> <p>Condition Reason: To ensure that where hazardous waste will be removed from a site an asbestos licensed contractor can definitively determine where the waste may be legally taken for disposal.</p>
<p>F. 19.</p>	<p>Disposal of Asbestos and Hazardous Waste</p> <p>While site work is being carried out, asbestos and hazardous waste, once classified in accordance with the hazardous waste classification condition must only be transported to waste facilities licensed to accept asbestos and appropriate classifications of hazardous waste.</p> <p>Condition Reason: To ensure that asbestos and other hazardous waste is disposed of lawfully under the Protection of the Environment Operations Act 1997 and relevant NSW EPA requirements.</p>
<p>F. 20.</p>	<p>Asbestos Removal Signage</p> <p>While site work is being carried out and when asbestos is being removed, standard commercially manufactured signs containing the words "DANGER ASBESTOS REMOVAL IN PROGRESS" measuring not less than 400mm x 300mm are to be erected in prominent visible positions on the site.</p> <p>Condition Reason: To ensure awareness of any hazard to the health and safety of persons working on the site and public.</p>
<p>F. 21.</p>	<p>Notification of Asbestos Removal</p> <p>While site work is being carried out, in addition to the requirements for licensed asbestos removalists to give written notice to SafeWork NSW, all adjoining properties and those opposite the development site must be notified in writing of the dates and times when asbestos removal is to be conducted.</p> <p>The notification is to identify the licensed asbestos removal contractor and include a contact person for the site together with telephone and facsimile numbers and email addresses.</p> <p>Condition Reason: To ensure that local residents are informed and have adequate contact details for incidents of asbestos removal.</p>
<p>F. 22.</p>	<p>Food Premises – Construction and Fitout</p> <p>While site work is being carried out, all construction and fitout of the food premises must comply with the details for the food premises submitted to and considered satisfactory by Council's Environmental Health Officer but no less compliant than with the Food Act 2003, Food Regulation 2015, the Food Standards Code as published by Food Standards Australia and New Zealand and AS 4674: Construction and fit out of food premises.</p>

	Condition Reason: To protect public health and ensure that food premises are easily maintained in a clean condition fit for food preparation and consumption.
F. 23.	Compliance with Construction Management Plan
	While site work is being carried out, all development activities and traffic movements must be carried out in accordance with the approved Construction Management Plan (CMP). All controls in the CMP must be maintained at all times. A copy of the CMP must be kept on-site at all times and made available to the Principal Certifier on request.
	Notes: <ul style="list-style-type: none"> Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.
	Condition Reason: To ensure compliance with the Construction Management Plan.

G. BEFORE ISSUE OF AN OCCUPATION CERTIFICATE

G. 1.	Occupation Certificate (section 6.9 of the Act)
	A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 6.10 of the Act) unless an occupation certificate has been issued in relation to the building or part.
	Notes: <ul style="list-style-type: none"> New building includes an altered portion of, or an extension to, an existing building.
	Condition Reason: To ensure the building is suitable to occupy.
G. 2.	Commissioning and Certification of Systems and Works
	Before the issue of any occupation certificate, works-as-executed (WAE) plans prepared by a registered surveyor, compliance certificates, and evidence of suitability in accordance with Part A5G1 of the BCA confirming that the works, as executed and as detailed, comply with the requirement of this consent, the Act, the Regulations, any relevant construction certificate, the BCA and relevant Australian Standards must be submitted to the satisfaction of the Principal Certifier.
	Works-as-executed plans, compliance certificates, and evidence of suitability in accordance with Part A5G1 of the BCA must include, but may not be limited to:
	<ol style="list-style-type: none"> a) Certification from the supervising professional engineer that the requirement of the Geotechnical/Hydrogeological conditions and report recommendations were implemented and satisfied during development work. b) All flood protection measures. c) All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1: Off-Street car parking. d) All stormwater drainage and storage systems. e) All mechanical ventilation systems. f) All hydraulic systems. g) All structural work. h) All acoustic attenuation work. i) All waterproofing. j) Such further matters as the Principal Certifier may require.

	<p>Notes:</p> <ul style="list-style-type: none"> The PC may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the Act, Regulation, development standards, BCA, and relevant Australia Standards. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services). The PC must submit to Council, with any occupation certificate, copies of WAE plans, compliance certificates and evidence of suitability in accordance with Part A5G1 of the BCA upon which the PC has relied in issuing any occupation certificate. <p>Condition Reason: To ensure that systems and works as completed meet development standards as defined by the Act, comply with the BCA, and this consent, and to ensure a public record of works as executed is maintained.</p>
<p>G. 3.</p>	<p>Removal of Ancillary Works and Structures</p> <p>Before the issue of any occupation certificate for the whole of the building, The following articles must be removed from the land and any adjoining public place:</p> <ol style="list-style-type: none"> the site sign, ablutions, hoarding, scaffolding, and waste materials, matter, article or thing. <p>Condition Reason: To ensure that all ancillary matter is removed prior to occupation.</p>
<p>G. 4.</p>	<p>Food Premises - Inspection and Registration</p> <p>Before the issue of any occupation certificate or occupation or use of any food premises:</p> <ol style="list-style-type: none"> an inspection of the fit out of the food premises must be arranged with Council's Environmental Health Officer, a satisfactory final inspection must have been undertaken by Council's Environmental Health Officer, and the food premises must be registered (notification of conduct) under section 100 of the Food Act 2003. <p>Notes:</p> <ul style="list-style-type: none"> To notify conduct of a food business, Councils approved form can be accessed at: https://www.woollahra.nsw.gov.au Inspections are subject to payment of the adopted inspection fee. Section 100 of the Food Act 2003 requires: "100 Notification of conduct of food businesses - The proprietor of a food business must not conduct the food business unless the proprietor has given written notice, in the approved form, of the information specified in the Food Safety Standards that is to be notified to the appropriate enforcement agency before the business is conducted. Maximum penalty: 500 penalty units in the case of an individual and 2,500 penalty units in the case of a corporation." Principal Certifiers are unable to issue compliance certificates in relation to compliance with the Food Act 2003, Food Regulation 2015; the Food Standards Code and the Australian Standard AS 4674: Construction and fit out of food premises since these are not matters which an Principal Certifier can be satisfied in relation to under clause 73 of the Development Certification and Fire Safety Regulation. This condition can only be satisfied following an inspection and sign off from Council's Environmental Health Officers. <p>Condition Reason: To ensure food premises accord with food safety and public health requirements.</p>

G. 5.	<p>Maintenance of the Kitchen Exhaust</p> <p>Before the issue of any occupation certificate, the proprietor(s) of the subject site shall enter into a contract agreement for the regular maintenance and cleaning of the odour control units and filtering systems. A copy of the contract agreement shall be made available to Council's Health Services Section prior to the occupation of the building.</p> <p>Condition Reason: To ensure the kitchen exhaust is maintained.</p>
G. 6.	<p>Fire Safety Certificates</p> <p>Before the issue of any occupation certificate to authorise a person:</p> <p>a) to commence occupation or use of a new building, or</p> <p>b) to commence a change of building use for an existing building, the Principal Certifier must be satisfied that a final fire safety certificate has been issued for the building.</p> <p>Notes:</p> <ul style="list-style-type: none"> • In this condition: <ul style="list-style-type: none"> interim fire safety certificate has the same meaning as it has in Part 11 of the Development Certification and Fire Safety Regulation. final fire safety certificate has the same meaning as it has in Part 11 of the Development Certification and Fire Safety Regulation. new building has the same meaning as it has in section 6.1 of the Act. <p>Condition Reason: To ensure that a final fire safety certificate is issued prior to occupation.</p>

H. OCCUPATION AND ONGOING USE

H. 1.	<p>Trading Hours</p> <p>During the occupation and ongoing use, trading hours are limited to:</p> <ul style="list-style-type: none"> • Monday to Friday: 5pm – midnight • Saturday and Sunday: 12pm – midnight <p>Notes:</p> <ul style="list-style-type: none"> • This condition does not apply to deliveries to, or dispatches from, the site of wholesale goods or internal activities that occur under the approved hours of use. • General use and deliveries or dispatches may be restricted by hours of use conditions. • This condition does not restrict the operation of noise pollution laws. • This condition does not apply to activities such as cleaning which takes place wholly within the building and which are not audible within any adjoining residential dwelling. If internal activities are audible within any adjoining residential dwelling such that they cause a nuisance to the occupiers of such dwelling than such internal activities must not occur outside these hours of use. <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood by commercial or retail trading including, but not limited to, external impacts associated with clients attending the site for business or otherwise.</p> <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 2.	<p>Maximum Patron Capacity</p> <p>During the occupation and ongoing use, the total number of patrons on the premises at any time must not exceed 46 patrons.</p>

	<p>Any person/s attending the premises for the purpose of ‘takeaway’ products/services will not be considered a ‘patron’ as detailed above, provided no food and or drink is consumed by those persons on the premises.</p> <p>Condition Reason: To prevent overcrowding inside the venue and to minimise impacts on local amenity.</p> <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood</p>
<p>H. 3.</p>	<p>Signage to be Displayed – Licensed Premises</p> <p>During the occupation and ongoing use, signage (in lettering not less than 15mm in height on a contrasting background) is to be erected in a prominent position near the principal entry to the premises in accordance with clause 73 of the Regulation.</p> <p>The signage must state the following and may change from time to time due to reviewable conditions in accordance with the conditions of this consent:</p> <p style="padding-left: 40px;">“Approved hours of operation – Indoor Area Monday to Friday: 5pm – midnight Saturday and Sunday: 12pm – midnight</p> <p style="padding-left: 40px;">Approved patron capacity 46 patrons</p> <p style="padding-left: 40px;">Upon leaving please respect local residents by minimising noise.”</p> <p>Condition Reason: To clearly identify the hours and patron capacity of the licensed premises.</p>
<p>H. 4.</p>	<p>Neighbourhood Amenity – Licensed Premises</p> <p>During the occupation and ongoing use, the Management of the premises:</p> <ol style="list-style-type: none"> a) Must ensure persons entering and leaving the premises do not crowd or loiter in the vicinity of the premises in such manner that pedestrian movement is obstructed or hindered. b) Must ensure that the manner in which the business of the premises is conducted and/or the behaviour of persons entering and leaving the premises does not cause undue disturbance to the amenity of the neighbourhood. In this regard, the Management must be responsible for the control of noise and litter generated by persons and/or premises operations. If so directed by Council or by NSW Police, the Management is to employ private security staff to ensure that this condition is complied with. c) Must record in a Register full details of any disturbance complaint/s made by a person to Management or staff in respect to the manner in which the business of the premises is conducted and/or the behaviour of persons entering or leaving the premises. Such recording will include time, date, nature of the complaint/s and any complainant details if provided. d) Must respond to any disturbance complaint/s in a timely and effective manner. All actions undertaken by Management / staff to resolve such complaint/s must be recorded in the Register. <p>Notes:</p> <ul style="list-style-type: none"> • The lead agency for the enforcement of this condition is NSW Police.

	<p>Condition Reason: This condition has been imposed to mitigate amenity impacts upon the neighbourhood.</p>
H. 5.	<p>Litter Patrols</p>
	<p>During the occupation and ongoing use, litter patrols are to be undertaken to collect and dispose of all litter and waste in the public areas adjacent to the licensed premises. Such patrols will take place intermittently during the hours of operation with the final patrol conducted at the cessation of trade.</p> <p>A litter patrol Register must be maintained and kept on the premises at all times detailing date, time of patrol, staff member responsible, and Manager’s signature.</p>
	<p>Condition Reason: This condition has been imposed to mitigate amenity impacts upon the neighbourhood.</p>
H. 6.	<p>Copies of Consents, Registers and Management Plans – Licensed Premises</p>
	<p>During the occupation and ongoing use, a full copy of all current development consents (including approved plans) for the operation of the premises, any Registers required and any required Plan of Management must be kept on the premises and made available for inspection immediately upon request by Council, NSW Police and/or Liquor and Gaming NSW authorised officers.</p>
	<p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 7.	<p>Sale/Consumption of Liquor</p>
	<p>During the occupation and ongoing use:</p> <p>Licensed Restaurant (On-Premises License)</p> <ol style="list-style-type: none"> a) No liquor may be sold, supplied or consumed on the premises except with the approval and authorisation from Liquor and Gaming NSW. b) The primary use of the premises must be that of a restaurant with the provision of genuine meals, prepared upon the premises, to patrons seated at comfortable dining positions. This will include a seat and access to table / bench space generally in accordance with the approved plans c) Liquor may only be sold and/or supplied to patrons on the premises with or ancillary to a genuine meal. d) Patrons must be seated whilst consuming liquor. e) The sale and/or supply of liquor must cease 15 minutes prior to the cessation of the respective hours of operation for the specified indoor and outdoor seating areas. f) No patron must be permitted to take glasses or open containers of liquor off the premises. g) Management is responsible for ensuring the number of patrons in the premises does not exceed the approved capacity specified in this consent.
	<p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 8.	<p>Operation in Accordance with Plan of Management (POM)</p>
	<p>During the occupation and ongoing use, the operation and management of the premises must be in accordance with the Plan of Management (POM) prepared by BMA Urban dated August 2023 (Submitted to Council on 11/03/2024).</p>

	<p>The POM must be filed with the Licensing Police of the Eastern Suburbs Police Area Command prior to the commencement of operations.</p> <p>The POM cannot be altered without the written consent of Council.</p> <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 9.	<p>Garbage Area and Containers</p> <p>During the occupation and ongoing use, the garbage area must be maintained at all times to ensure that a breeding ground is not created for pests and must be capable of being easily and effectively cleaned.</p> <p>All garbage containers must have tight fitting lids and be large enough or in sufficient numbers to contain all the waste produced by the business while awaiting the next removal from the premises.</p> <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 10.	<p>Glass Sorting and Collection</p> <p>During the occupation and ongoing use, glass must not be emptied or transferred from one receptacle to another anywhere in a public place. All glass must be emptied/transferred within the premises and removed in containers.</p> <p>No bottle or glass sorting, recycling or collection shall take place between 8.00pm and 8.00am Sunday to Friday and between 9.00pm Saturday and 10am Sundays and Public Holidays.</p> <p>Condition Reason: To mitigate amenity impacts upon the neighbourhood.</p>
H. 11.	<p>Surveillance Cameras (CCTV)</p> <p>During the occupation and ongoing use:</p> <p>Licensed Premises The Management must maintain a closed-circuit television (CCTV) system on the premises.</p> <p>The CCTV system must comply with the following requirements:</p> <ol style="list-style-type: none"> a) It must operate continuously from opening time until one hour after closing. b) It must record in digital format at a minimum of six frames per second. c) Any recorded image must specify the time and date of the image. d) The system's cameras must be located within the property and cover: <ul style="list-style-type: none"> • all entry and exit points of the premises, • the footpath immediately adjacent to the premises, and • all publicly accessible areas (other than toilets) on the premises, • from floor level to a minimum height of two metres. e) CCTV recordings must be retained for at least 30 days. f) Management must ensure the system is accessible by at least one member of staff at all times it is in operations, and g) Provide any recordings made by the system to Council or NSW Police within 24 hours of any request by an authorised officer to provide such recordings. <p>Notes:</p> <ul style="list-style-type: none"> • The lead agency for enforcement is NSW Police.

	<p>Condition Reason: To reduce and prevent crime and ensure community safety.</p>
<p>H. 12.</p>	<p>NSW Police Requirements (Licensed Premises)</p> <p>During the occupation and ongoing use:</p> <p>Incidents involving acts of violence Immediately after the person in charge of the licensed premises becomes aware of an incident involving an act of violence causing an injury to a person on the premises, the person must:</p> <ol style="list-style-type: none"> a) take all practical steps to preserve and keep intact the area where the act of violence occurred, b) retain all material and implements associated with the act of violence in accordance with the Crime Scene Preservation Guidelines issued by the NSW Police, and c) make direct and personal contact with the Eastern Suburbs Police Area Command and advise the Commander or delegate of the incident, and comply with any directions given by the Commander or delegate to preserve or keep intact the area where the violence occurred. <p>Safety and Security Measures The following safety and security measures must be complied with:</p> <ol style="list-style-type: none"> a) Security guards (added by Police as relevant). b) The entrance is to remain illuminated during all hours of trade past sunset until close. c) The licensed premises are to be supervised during all hours of trade. d) An incident register is to be utilised and maintained on a daily basis solely for the purpose of the ground floor restaurant during all hours of trade. <p>Designated Taxi Phone Service A designated taxi phone line or similar service is to be located at the bar service area and maintained by management during all hours of trade and is to be implemented from the date of commencement of the restaurant use.</p> <p>No Use of Strobes, Lasers or Flicker Lights No strobes, lasers or flicking lights are to be employed to the restaurant area.</p> <p>Other Conditions (added by NSW Police as relevant)</p> <p>Notes:</p> <ul style="list-style-type: none"> • The lead agency for enforcement is NSW Police.
	<p>Condition Reason: To reduce and prevent crime and ensure community safety.</p>
<p>H. 13.</p>	<p>Waste Collection – Commercial</p> <p>During the occupation and ongoing use, general waste collection is to be undertaken ONLY between the hours of:</p> <ul style="list-style-type: none"> • 7.00am to 9.00pm Monday to Friday, and • 8.00am to 8.00pm Saturday, Sunday and Public Holidays <p>Condition Reason: To protect the amenity of neighbouring residents.</p>

<p>H. 14.</p>	<p>Waste Management – Commercial</p> <p>During the occupation and ongoing use, compliance must be maintained with the site waste minimisation and management plan (SWMMP) and with Woollahra DCP 2015, Chapter E5–Waste Management.</p> <p>All waste must be presented for collection in a receptacle. Waste receptacles must be presented no earlier than the close of business on the day before collection. Waste and recycling bins/crates must be removed from the road or footpath within 1 hour of collection or otherwise in accordance with the approved SWMMP.</p> <p>Receptacles are not to be stored in any public place at any time. Waste and recycling receptacles must be stored at all times within the boundaries of the site.</p> <p>This condition does not apply to the extent that Activity Approval exists under the Local Government Act 1993 or the Roads Act 1993 and subject that all conditions of such approval(s) are complied with.</p> <p>Notes:</p> <ul style="list-style-type: none"> No waste will be collected by Council that is not presented properly. The waste must be presented with lid closed to reduce littering. <p>Condition Reason: To ensure that the provisions of the approved SWMMP and Woollahra DCP are complied with during the ongoing operations of the development.</p>
<p>H. 15.</p>	<p>Food Premises - Maintenance of Food Premises</p> <p>During the occupation and ongoing use, the food premises must be maintained in accordance with the Food Act 2003, Food Regulation 2015; the Food Standards Code as published by Food Standards Australia and New Zealand and Australian Standard AS 4674: Construction and fit out of food premises.</p> <p>Condition Reason: To protect public safety.</p>
<p>H. 16.</p>	<p>Outdoor Lighting – Commercial</p> <p>During the occupation and ongoing use, outdoor lighting must comply with AS/NZS 4282: Control of the obtrusive effects of outdoor lighting. The maximum luminous intensity from each luminare and threshold limits must not exceed the level 1 control relevant under tables in AS/NZS 4282.</p> <p>Notes:</p> <ul style="list-style-type: none"> Council may consider, subject to an appropriate Section 4.55 Application, relaxation of this condition where it can be demonstrated, by expert report, that the level of lighting in the existing area already exceeds the above criteria, where physical shielding is present or physical shielding is reasonably possible. <p>Condition Reason: To protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.</p>
<p>H. 17.</p>	<p>Noise from Licensed Premises</p> <p>During the occupation and ongoing use, the LA10 noise level emitted from the licensed premises must not exceed the background noise level in any Octave Band Centre Frequency (31.5 Hz – 8k Hz inclusive) by more than 5dB(A) between 07:00 am and 12:00 midnight at the boundary of any affected residence.</p>

	<p>The LA10 noise level emitted from the licensed premises must not exceed the background noise level in any Octave Band Centre Frequency (31.5 Hz – 8k Hz inclusive) between 12:00 midnight and 07:00am at the boundary of any affected residence.</p> <p>Notwithstanding compliance with the above, the noise from the licensed premises must not be audible within any habitable room in any residential premises between the hours of 12:00 midnight and 07:00am.</p> <p>Notes:</p> <ul style="list-style-type: none"> • dB(A) is a value used for ‘A-weighted’ sound pressure levels ‘A’ frequency weighting is an adjustment made to approximate the response of the human ear. • licensed premises means premises licensed under the Liquor Act 2007. • For the purposes of this condition, the LA10 is the A-weighted sound pressure level that is exceeded for 10% of the time over which a given sound is measured. • The background noise level is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the LA90 level measured by a sound level meter over the applicable period. • This condition reflects the minimum standard condition imposed by the former Casino Liquor and Gaming Control Authority. Liquor & Gaming NSW or the Independent Liquor & Gaming Authority may specify other standards in respect of the above condition under the Liquor Act 2007, and associated Regulations. Section 79 of the Liquor Act 2007 provides an informal mechanism for complaints to be made (by residents, Police, local consent authorities and others) where the amenity of local neighbourhoods is unduly disturbed by the conduct of licensed premises including registered clubs (or their patrons). The Secretary of the Department of Industry is responsible for resolving such complaints and may impose temporary or permanent conditions on any licence. For more information go to Liquor and Gaming NSW website www.liquorandgaming.nsw.gov.au • Interior noise levels of licensed premises which exceed safe hearing levels are not supported or condoned by Council.
	<p>Condition Reason: To protect the amenity of the neighbourhood.</p>
<p>H. 18.</p>	<p>Noise from Mechanical Plant and Equipment</p> <p>During the occupation and ongoing use, the noise level measured at any boundary of the site at any time while the mechanical plant and equipment is operating must not exceed the background noise level. Where noise sensitive receivers are located within the site, the noise level is measured from the nearest strata, stratum or community title land and must not exceed background noise level at any time.</p> <p>The background noise level is the underlying level present in the ambient noise, excluding the subject noise source, when extraneous noise is removed. For assessment purposes the background noise level is the LA90, 15 minute level measured by a sound level meter.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Words in this condition have the same meaning as in the Noise Policy for Industry (2017) www.epa.nsw.gov.au/your-environment/noise/industrial-noise/noise-policy-for-industry-(2017) and Noise Guide for Local Government (2013) www.epa.nsw.gov.au/your-environment/noise/regulating-noise/noise-guide-local-government <p>Condition Reason: To protect the amenity of the neighbourhood.</p>

<p>H. 19.</p>	<p>Noise Control</p> <p>During the occupation and ongoing use, the use of the premises must not give rise to the transmission of offensive noise to any place of different occupancy. Offensive noise is defined in the Protection of the Environment Operations Act 1997.</p> <p>Notes:</p> <ul style="list-style-type: none"> • Council will generally enforce this condition in accordance with the Noise Guide for Local Government (www.epa.nsw.gov.au/your-environment/noise/regulating-noise/noise-guide-local-government) and the NSW Industrial Noise Policy (www.epa.nsw.gov.au/your-environment/noise/industrial-noise) published by the NSW Environment Protection Authority. Other State Government authorities also regulate the Protection of the Environment Operations Act 1997. • Useful links: <ul style="list-style-type: none"> - Community Justice Centres—free mediation service provided by the NSW Government www.cjc.nsw.gov.au. - NSW Environment Protection Authority— see “noise” section www.environment.nsw.gov.au/noise. - NSW Government legislation- access to all NSW legislation, including the Protection of the Environment Operations Act 1997 and the Protection of the Environment Noise Control Regulation 2017 is available at www.legislation.nsw.gov.au. - Australian Acoustical Society—professional society of noise related professionals www.acoustics.asn.au. - Association of Australian Acoustical Consultants—professional society of noise related professionals www.aaac.org.au. - Liquor and Gaming NSW—www.liquorandgaming.nsw.gov.au. <p>Condition Reason: To protect the amenity of the neighbourhood.</p>
<p>H. 20.</p>	<p>Maintenance of Sound Attenuation</p> <p>During the occupation and ongoing use, sound attenuation must be maintained in accordance with the acoustic report.</p> <p>Condition Reason: To protect the amenity of the neighbourhood.</p>
<p>H. 21.</p>	<p>Storage and Handling of Flammable and Combustible Liquids</p> <p>During the occupation and ongoing use, the storage and handling of flammable and combustible liquids must be in accordance with AS1940: The storage and handling of flammable and combustible liquids.</p> <p>Condition Reason: To protect public safety.</p>
<p>H. 22.</p>	<p>Maintenance of the Kitchen Exhaust log</p> <p>During the occupation and ongoing use, a logbook detailing the schedule maintenance and cleaning of the odour control units and filtering systems shall be kept on the premises at all times and be made available for viewing by Council’s Environmental Health Officer’s as required.</p> <p>Condition Reason: To protect the amenity of the neighbourhood.</p>

<p>H. 23.</p>	<p>Operation in Accordance with Operational Traffic Management Plan (OTMP)</p> <p>During the occupation and ongoing use:</p> <p>a) The delivery and waste collection operations shall be in accordance with the operational traffic management plan submitted in the Amended Operational Plan of Management, prepared by BMA Urban dated August 2023 (Submitted to Council on 11/03/2024);</p> <p>b) The delivery and waste collection vehicles attending the site must not impede safe access to the neighboring properties at all times.</p> <p>Condition Reason: To maximise road safety and performance.</p>
<p>H. 24.</p>	<p>Annual Fire Safety Statements (Class 1b to 9c buildings inclusive)</p> <p>During the occupation and ongoing use, each year, an annual fire safety statement must be provided to Council and the Commissioner of Fire and Rescue NSW. The annual fire safety statement must be prominently displayed in the building.</p> <p>Notes:</p> <ul style="list-style-type: none"> • essential fire safety measure has the same meaning as in Schedule 2 of the Development Certification and Fire Safety Regulation. • annual fire safety statement has the same meaning as in clause 88 of the Development Certification and Fire Safety Regulation. • Visit Council's website for additional information in relation to fire safety www.woollahra.nsw.gov.au. <p>Condition Reason: To ensure public safety.</p>
<p>H. 25.</p>	<p>Access via the Rear Passageway</p> <p>The rear access via the passageway shall be limited to use by staff as an emergency exit when required and for the purposes of waste management as specified in this consent.</p> <ul style="list-style-type: none"> • There shall be no access or egress for restaurant customers except when required as an emergency exit. • At all other times the access shall be for emergency purposes only. <p>Condition Reason: This is to mitigate amenity impacts upon the neighbourhood</p>

SUBDIVISION WORK

I. BEFORE ISSUE OF A SUBDIVISION WORKS CERTIFICATE

Nil.

J. BEFORE SUBDIVISION WORK COMMENCES

Nil.

K. BEFORE ISSUE OF A SUBDIVISION CERTIFICATE

Nil.

LAND SUBDIVISION

L. BEFORE ISSUE OF A SUBDIVISION CERTIFICATE

Nil.

STRATA SUBDIVISION

M. BEFORE ISSUE OF A STRATA CERTIFICATE

Nil.

Note: In accordance with the Woollahra Local Planning Panel Operational Procedures the votes are recorded on this planning matter.

For the Motion

Against the Motion

Judith Clark
Penelope Holloway
Sandra Robinson
Ronald Schaffer

4/0

There being no further business the meeting concluded at 3.45pm.

We certify that the pages numbered 1 to 139 inclusive are the Minutes of the Woollahra Local Planning Panel (Electronic Meeting) Meeting held on 20 June 2024 and confirmed by all Panel members of the Woollahra Local Panel on 24 June 2024 as correct.

Chairperson

Secretary of Committee

Expert

Expert

Community Representative